



2025 HANKOOK TIRE

PRODUCT CATALOG

Passenger and Light Truck Tires

United States of America



OFFICIAL PREMIUM PARTNER OF



hankooktire.com





Contents

About Hankook

Hankook Overview
Motorsports
OE Supply

Product Overview

Product Overview
Positioning Map

Consumer

CAR / LT

iON
Ventus
Kinergy
Weatherflex

SUV / 4X4

Dynapro

Winter

Winter i*cept
Winter i*poke

Commercial

Van

Vantra


Leading Global Tire Company, Hankook Tire

Hankook Tire & Technology Overview

Hankook Tire is a global corporation that has consistently met the challenges of the future, always a step ahead of changes in the world economy. We have anticipated and prepared for what lies ahead, taking the lead in fostering new growth when important opportunities arise.

Our sales network spans across China, Europe, the Americas, Asia Pacific, and the Middle East & Africa as well as Korea where our headquarters is located in order to ensure that our products satisfy local customer needs.

 Co-CEOs <p>Jongseon Ahn Sanghoon Lee</p>	 Products <p>Tires for passenger vehicles, SUV, Trucks and Buses</p>	 Global Ranking in Tire Sales <p>7th</p>	 Global Sales Revenue (2024) <p>USD 6.9 Billion</p>
 Production Capacity <p>102 Million Units</p>	 Global Corporate Organisation <p>7 regional headquarters 5 R&D centers 8 manufacturing plants 39 local subsidiaries</p>	 Number of Selling Countries <p>Approximately 160 countries</p>	 Number of Employees <p>Approximately 22,000</p>

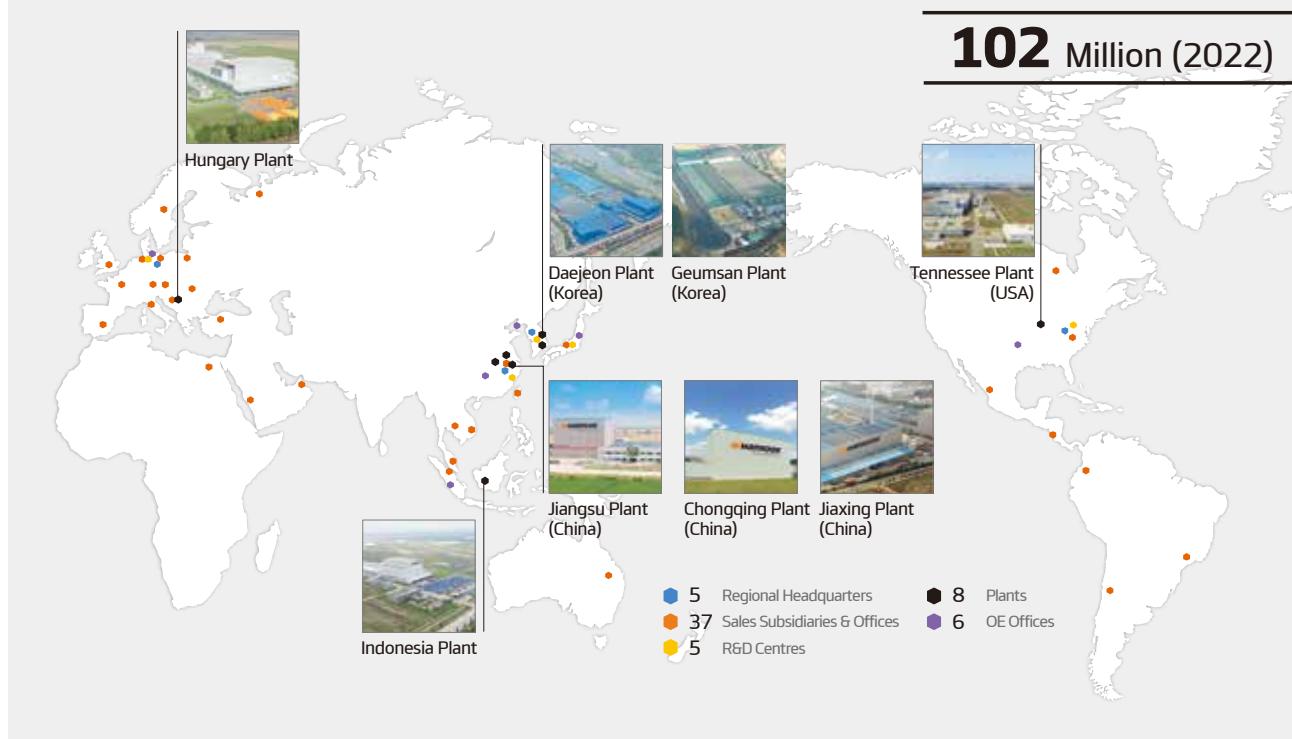

Hankook Tire's Global R&D Center

Technoplex



Hankook Technoplex is the corporate headquarters of Hankook Tire & Technology, located in Pangyo Techno Valley, Gyeonggi-do, South Korea. Standing on a 5,461m² lot area with 6 floors below ground and 10 floors above ground making up a total of 45,919m² gross floor area, the building serves as the foundation for the company's growth strategy and culture. As Hankook's second project with the world-renowned architecture firm Foster+Partners founded by Sir Norman Foster, it features flexible and open workspaces to nurture a challenging spirit and innovation, connect employees, and further support its proactive culture.

Technodome



Hankook's high-tech R&D center, Technodome, stands on a massive footprint of 70,288m² of lot area with a 96,347m² gross floor area in Daedeok Innopolis, Daejeon, Korea. A high-tech R&D center that oversees four global research institutes in the U.S., Germany, China, and Japan, the Technodome serves as a symbol of Hankook Tire's innovation, developing proprietary technology and strengthening future advancements based on traditional and applied research. The "glocalization" (Globalization + Localization) strategy implemented through the cooperation of global research institutes worldwide allows Hankook Tire to lead future tire technology development while sustaining superior quality.

Technoring



Located in Taean-gun, Chungcheongnam-do, South Korea, Hankook Technoring has a site area of 1.26 million square meters (as large as 125 football fields combined), featuring one of the largest and the longest tire test track in Asia and comprising 13 independent testing roads. The proving ground is equipped with office buildings, workshops, a gas station, and electric vehicle charging stations that accommodate all types of vehicles including passenger cars, trucks and buses. Its scale and state-of-the-art facilities meet the demanding requirements of global premium carmakers.

Hankook Motorsports

Hankook

Hankook manufactures globally innovative, award winning radial tires of proven superior quality for passenger cars, light trucks, SUVs, RVs, trucks, and buses as well as motorsports (circuit racing/rallies). Aspiring to bring consumers the most superior product quality, technological excellence and driving satisfaction, Hankook continuously invests in research and development maintaining five R&D centers and eight production facilities around the world. The company creates bespoke tire solutions for Original Equipment according to the requirements of leading premium car manufacturers across the globe and produces over 104 million tires for passenger cars, commercial vehicles and motorsports each year. Hankook employs approximately 22,000 people worldwide and sell products in over 180 countries. Internationally leading car manufacturers rely on tires made by Hankook for their Original Equipment.

For more information please visit <http://www.hankooktire.com>

Formula E



Hankook is the official tire partner of the ABB FIA Formula E World Championship for the 2022/23 season given its emphasis and track record in sustainability initiatives and product development. Hankook tires are produced from recycled material containing bio-sourced components and sustainable rubber. Formula E Gen3 racing cars are only allowed a single type of tire for both dry and wet conditions and only 2 sets per race. This significantly helps reduce the number of tires used and their transportation to each race. Hankook's commitment to tire technology has resulted in a racing tire dedicated to the unique demands of Formula E racing: maintaining grip until the end of the race whilst withstanding the strong initial torque of the electric motor and the enormous down force, corner speed and lateral acceleration. Formula E is a global stage for the technological development of everything related to electric vehicles.

Super Trofeo



In 2023 Hankook became the official technical partner and exclusive tire supplier of Lamborghini Super Trofeo, the renowned international one-make cup, which comprises three series, held on four continents. Hankook developed a new, high-performance race tire, the Ventus Race, specifically tailored to the Lamborghini Huracán Super Trofeo Evo² racing car; its medium compound provides a high level of grip and maximum consistency in all conditions and at all racetracks. This brand-new tire is being used in Lamborghini Super Trofeo Europe, North America and Asia. Hankook provides technical support at the racetracks with Hankook engineers and mechanics on site to assist the drivers and teams.

24H Series



Hankook races with the world's top super cars proving its performance and durability and is the official sponsor of the world's largest endurance race series, the 24H Series. The series in which global premium brands including Ferrari, Mercedes-Benz and Porsche participate is a continuous 24 hour race which challenges the limits of the drivers, tires and race cars in the most extreme circumstances. The durability and performance of a race car and tires are the decisive factors in the series.

ERC



Since the 2000s, Hankook Tire has focused on developing rally tires that can perform even in extreme situations. Currently, Hankook Tire is fiercely competing in more than 10 countries and is demonstrating its technological prowess in the ERC and various National Rally Championships. In addition to providing various sponsorships to drivers with growth potential, Hankook Tire is also actively involved in the development and investment of improving tire performance.

TCR Italy



Hankook Tire proudly serves as the exclusive tire supplier for TCR Italy. The heart of TCR Italy lies in Touring Car racing, characterized by a 2-liter turbocharged engine and front-wheel drive. This exciting category has attracted the participation of renowned automobile manufacturers, including BMW, Audi, Alfa Romeo, Peugeot, Opel, Honda, Hyundai, and Cupra. Hankook Tire, as the exclusive tire supplier for TCR Italy, plays a crucial role in enhancing the performance and safety of participating vehicles on the circuit. This partnership solidifies Hankook Tire's position as a key player in the competitive field of motorsports, demonstrating a commitment to excellence and innovation.

Hankook OE Supply

As a leading global tire company, Hankook Tire is selected as Original Equipment for the premium automotive companies. We pride ourselves as a reliable contributor to the future advancement of the automobile industry.



AUDI

A3, A4, TT RS, e-tron Sportback, Q3, Q5, Q7, Q8,
RS Q8, RS4, RS5, RS6, RS7, S#, SQ8, TT



BMW

3 Series, 4 Series, 5 Series, 6 Series, 7 Series,
i4, , i5, X1, X2, X3, X3M, X4M, X5, X6



MERCEDES-BENZ

A-Class, B-Class, C-Class Hybrid, E-Class,
AMG GT, GLC Coupe, S-Class



PORSCHE

Boxster, Cayenne, Macan, Panamera, Taycan



TESLA

Model 3, Model Y



VOLKSWAGEN

Arona, Golf, ID.4, Jetta, Tiguan,
Tiguan R, Transporter



About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Hankook OE Supply

PORSCHE

Vehicle Model	Product Name	Pattern	Size
Boxster ('21-'24)	Ventus S1 evo 3	K127	235/40ZR19
	Ventus S1 evo 3	K127	265/40ZR19
Cayenne ('17-'22)	Ventus S1 evo 3 SUV	K127A	285/40ZR21
	Ventus S1 evo 3 SUV	K127A	315/35ZR21
Cayenne ('23-'30)	Ventus S1 evo Z	K129	255/55ZR20
	Dynapro HP2 Plus	RA33D	255/55R20
	Winter i*cept evo 3 X	W330A	255/55R20
	Dynapro HP2 Plus	RA33D	295/45R20
	Winter i*cept evo 3 X	W330A	295/45R20
Macan ('18-'21)	Ventus S1 evo Z	K129	295/45ZR20
	Ventus S1 evo 2 SUV	K117A	235/60R18
Macan EV ('23-'29)	Ventus S1 evo 2 SUV	K117A	255/55R18
	Ventus S1 evo 3 ev	K127E	235/55R20
Panamera ('19-'28)	Ventus S1 evo 3 ev	K127E	285/45R20
	Ventus S1 evo Z	K129	265/45ZR19
Panamera ('20-'28)	Ventus S1 evo Z	K129	295/40ZR19
	Ventus S1 evo Z	K129	275/40ZR20
Panamera ('23-'29)	Ventus S1 evo Z AS	H129	275/40R20
	Ventus S1 evo Z AS	H129	315/35R20
Taycan ('19-'24)	Ventus S1 evo 3 ev	K127E	225/55R19
	Ventus S1 evo 3 ev	K127E	275/45R19

MERCEDES BENZ

Vehicle Model	Product Name	Pattern	Size
AMG GT ('23-'30)	Ventus S1 evo Z	K129	295/35ZR20
	Ventus S1 evo Z	K129	305/35ZR20
A-Class ('18-'19)	Ventus S1 evo 2	K117	205/55R17
	Ventus S1 evo 2	K117	225/45R18
A-Class ('18-'25)	Ventus S1 evo 2	K117B	225/45R18
	Ventus S1 evo 2	K117B	205/55R17
B-Class ('18-'19)	Ventus S1 evo 2	K117	225/45R18
	Ventus S1 evo 2	K117	205/55R17
B-Class ('18-'25)	Ventus S1 evo 2	K117B	225/45R18
	Ventus S1 evo 2	K117B	205/55R17
C-Class ('13-'20)	Ventus S1 evo 2	K117B	225/50R17
	C-Class Hybrid ('15-'21)	Ventus S1 evo 2	K117B
E-Class ('15-'23)	Ventus S1 evo 2	K117B	245/45R17
	Ventus S1 evo 2	K117B	225/55R17
E-Class ('17-'19)	Ventus S1 evo 2	K117B	245/45R18
	E-Class ('17-'25)	Ventus S1 evo 2	K117B
E-Class ('22-'27)	Ventus S1 noble 2	H452B	245/45R18
	Ventus S1 evo 3	K127	245/45R19
GLC Coupe ('16-'22)	Ventus S1 evo 3	K127	275/40R19
	Ventus S1 evo 2 SUV	K117A	235/55R19
Metris ('15-'20)	Ventus S1 evo 2 SUV	K117A	255/50R19
	Ventus S1 noble 2	H452	225/55R17
S-Class ('20-'27)	Winter i*cept evo 2	W320	255/50R18
	Ventus S1 evo 3	K127	255/45R19
	Ventus S1 noble 2	H452B	255/45R19
	Ventus S1 evo 3	K127	285/40R19
	Ventus S1 noble 2	H452B	255/40R20
	Ventus S1 noble 2	H452B	255/40R20
	Ventus S1 noble 2	H452B	285/35R20
	Ventus S1 noble 2	H452B	285/35R20

AUDI

Vehicle Model	Product Name	Pattern	Size
A3 ('16-'20)	Ventus S1 evo 2	K117	225/40R18
	Ventus S1 evo 2	K117	255/35R19
A4 ('15-'22)	Ventus S1 evo 2	K117	225/50R17
	Ventus S1 evo 2	K117	245/40R18
A4 ('15-'24)	Ventus S1 evo 2	K117	245/35R19
	e-tron ('18-'24)	Dynapro HP2 Plus	RA33D
e-tron ('20-'29)	Kinergy AS X ev	EH01A	235/55R19
	Kinergy AS X ev	EH01A	255/50R19
e-tron GT ('19-'24)	Ventus S1 evo 3 ev	K127E	225/55R19
	Ventus S1 evo 3 ev	K127E	275/45R19
e-tron Sportback ('20-'25)	Ventus S1 evo 3 ev	K127E	265/40R22
	Ventus S1 evo 3 ev	K127E	285/35R22
Q3 ('18-'24)	Ventus S1 evo 2 SUV	K117A	235/50R19
	Ventus S1 evo 2 SUV	K117A	255/45R19
Q5 ('20-'23)	Ventus S1 evo 3 SUV	K127A	235/60R18
	Ventus S1 evo 2 SUV	K117A	285/35R22
Q7 ('16-'22)	Ventus S1 evo 2 SUV	K117A	285/40R22
	Dynapro HP2 Plus	RA33D	285/45R21
Q8 ('18-'20)	Ventus S1 evo 3 SUV	K127A	285/40R22
	Dynapro HP2 Plus	RA33D	285/40R22
Q8 ('18-'21)	Ventus S1 evo 3 SUV	K127A	285/35R23
	Dynapro HP2 Plus	RA33D	275/50R20
Q8 ('18-'22)	Dynapro HP2 Plus	RA33D	285/40R22
	Ventus S1 evo 3 SUV	K127A	265/55R19
Q8 ('18-'24)	Ventus S1 evo 3 SUV	K127A	285/45R21
	Dynapro HP2 Plus	RA33D	285/45R21
RS Q8 ('19-'24)	Ventus S1 evo 3 SUV	K127A	285/40R22
	Winter i*cept evo 2 SUV	W320A	275/40R22
RS4 ('17-'22)	Winter i*cept evo 2 SUV	W320A	295/35R23
	Ventus S1 evo 2	K117	265/35R19
RS5 ('17-'22)	Ventus S1 evo 2	K117	275/30R20
	Ventus S1 evo 2	K117	265/35R19
RS5 ('17-'22)	Ventus S1 evo 2	K117	275/30R20
	RS Q8 ('19-'21)	Ventus S1 evo 3 SUV	K127A
RS Q8 ('19-'24)	Ventus S1 evo 3 SUV	K127A	295/40R22
	Ventus S1 evo 3	K127	275/35R21
RS6 ('19-'24)	Ventus S1 evo 3	K127	285/30R22
	Ventus S1 evo 3	K127	275/35R21
RS7 ('19-'24)	Ventus S1 evo 3	K127	285/30R22
	Ventus S1 evo 3	K127	285/30R22
S3 ('16-'20)	Ventus S1 evo 3	K127	225/40R18
	SQ8 ('18-'20)	Ventus S1 evo 3 SUV	K127A
TT ('14-'22)	Ventus S1 evo 2	K117	225/50R17
	Ventus S1 evo 2	K117	245/35R19
TT RS ('15-'24)	Ventus S1 evo 2	K117	245/35R19

* Data based on March 2025

BMW

Vehicle Model	Product Name	Pattern	Size
3-Series ('18-'25)	Ventus S1 evo 3	K127	225/50R17
	Ventus S1 noble 2	H452	225/45R18
	Ventus S1 evo 3	K127B	225/45R18
3-Series ('20-'25)	Ventus S1 evo 3	K127B	255/40R18
	Ventus S1 noble 2	H452B	225/45R18
4-Series ('18-'25)	Ventus S1 noble 2	H452	225/45R18
	Ventus S1 evo 3	K127B	255/40R18
4-Series ('21-'25)	veNtus S1 evo 3	K127	245/45R18
	veNtus S1 evo 3	K127	255/45R18
	veNtus S1 evo 3	K127	245/40R19
	veNtus S1 evo 3	K127B	245/40R19
	veNtus S1 evo 3	K127	255/40R19
	veNtus S1 evo 3	K127B	255/40R19
5-Series ('16-'20)	Ventus S1 evo 2	K117B	245/45R18
5-Series ('16-'23)	Ventus S1 evo 2	K117B	225/55R17
5-Series ('17-'23)	Ventus S1 noble 2	H452B	245/45R18
	Ventus S1 evo 2	K117B	245/45R18
5-Series ('20-'23)	Ventus S1 evo 3	K127B	245/45R18
	Ventus S1 evo 3	K127B	275/40R18
5-Series ('22-'26)	Ventus S1 evo 3	K127	245/45R19
	Ventus S1 evo 3	K127	275/40R19
5-Series ('24-'30)	iON i*cept	IW01	HL275/40R20
	iON i*cept	IW01	HL285/40R20
5-Series GT ('15-'22)	Ventus S1 evo 2	K117B	245/50R18
6-Series GT ('15-'24)	Ventus S1 evo 2	K117B	245/45R19
	Ventus S1 evo 2	K117B	275/40R19
7-Series GT ('15-'22)	Ventus S1 evo 2	K117B	245/50R18
7-Series GT ('15-'24)	Ventus S1 evo 2	K117B	275/40R19
	Ventus S1 evo 2	K117B	245/45R19
i4 ('21-'25)	veNtus S1 evo 3	K127	245/45R18
	veNtus S1 evo 3	K127	255/45R18
	veNtus S1 evo 3	K127	245/40R19
	veNtus S1 evo 3	K127B	245/40R19
	veNtus S1 evo 3	K127	255/40R19
	veNtus S1 evo 3	K127B	255/40R19
i5 ('23-'26)	Ventus S1 evo 3	K127	245/45R19
	Ventus S1 evo 3	K127	275/40R19
M5 ('24-'30)	iON i*cept	IW01	HL275/40R20
	iON i*cept	IW01	HL285/40R20
X1 ('15-'20)	Ventus S1 evo Z	K129	HL285/40ZR20
	Ventus S1 evo Z	K129	HL295/35ZR21
X1 ('24-'30)	Ventus S1 noble 2	H452	225/55R17
X1 ('24-'31)	iON i*cept	IW01	HL275/40R20
	iON i*cept	IW01	HL285/40R20
X2 ('15-'20)	Ventus S1 evo Z	K129A	245/35R21
X2 ('17-'24)	Ventus S1 evo 2	K117B	225/50R18
X2 ('24-'31)	Ventus S1 evo Z	K129A	245/35R21
X3 ('17-'24)	Ventus S1 evo 2 SUV	K117C	225/60R18
X3 M ('20-'25)	Ventus S1 evo Z	K129	255/40ZR21
	Ventus S1 evo Z	K129	265/40ZR21
X4 ('17-'24)	Ventus S1 evo 2 SUV	K117C	225/60R18

BMW

Vehicle Model	Product Name	Pattern	Size
X4 M ('20-'25)	Ventus S1 evo Z	K129	255/40ZR21
	Ventus S1 evo Z	K129	265/40ZR21
X5 ('18-'25)	Ventus S1 evo 3 SUV	K127C	265/50R19
X5 ('19-'25)	Ventus S1 evo 3 SUV	K127A	255/55R18
	Ventus S1 evo 3 SUV	K127C	275/45R20
X5 ('20-'25)	Ventus S1 evo 3 SUV	K127C	305/40R20
	Ventus S1 evo 3 SUV	K127C	275/40R21
X5 PHEV ('23-'26)	Ventus S1 evo 3 SUV	K127C	315/35R21
	Ventus S1 evo 4 X	K137A	275/45R20
X6 ('18-'25)	Ventus S1 evo 4 X	K137A	305/40R20
	Ventus S1 evo 4 X	K137A	275/40R21
X6 ('19-'25)	Ventus S1 evo 3 SUV	K127C	315/35R21
	Ventus S1 evo 3 SUV	K127C	265/50R19
X6 ('20-'25)	Ventus S1 evo 3 SUV	K127A	255/55R18
	Ventus S1 evo 3 SUV	K127C	275/45R20
X6 ('20-'25)	Ventus S1 evo 3 SUV	K127C	305/40R20
	Ventus S1 evo 3 SUV	K127C	275/40R21
X6 ('20-'25)	Ventus S1 evo 3 SUV	K127C	315/35R21

LINCOLN

Vehicle Model	Product Name	Pattern	Size
MKX ('14-'21)	Ventus S1 noble 2	H452	245/50R20
MKT ('10-'19)	Optimo H426	H426	255/45R20
Navigator ('14-'24)	Dynapro AT-M	RF10	275/55R20

FORD

Vehicle Model	Product Name	Pattern	Size
Mustang ('14-'27)	Ventus S1 noble 2	H452	235/55R17
Mustang Mach E ('23-'26)	Ventus S1 evo 3 ev	K127E	225/55R19
	Ventus S1 noble 2	H452	245/55R19
Edge ('19-'24)	Ventus S1 noble 2	H452	245/50R20
	Ventus S1 noble 2	H452	245/50R20
Expedition ('14-'24)	Dynapro AT-M	RF10	275/55R20
	Ventus S1 noble 2	H452	255/50R20
Explorer ('16-'19)	Dynapro AT2	RF11	275/55R20
	Ventus S1 noble 2	H452	255/50R20
F-150 ('18-'20)	Dynapro AT2	RF11	275/55R20
	Optimo H426	H426	275/60R20
F-150 XLT, Lariat, Platinum, Limited, Lightning ('20-'26)	Optimo H426	H426	185/60R15
	Optimo H426	H426	195/50R16
Fiesta ('11-'19)	Optimo H426	H426	255/45R20
	Optimo H426	H426	275/55R20
Flex ('10-'19)	Dynapro AT-M	RF10	265/65R17
	Dynapro AT-M	RF10	265/60R18
Flex ('14-'19)	Dynapro AT-M	RF10	265/60R18
	Dynapro AT-M	RF10	265/60R18
Ranger XLT ('19-'23)	Dynapro AT-M	RF10	LT265/65R17
	Dynapro AT-M	RF10	LT265/65R17
Ranger Lariat ('19-'23)	Dynapro AT-M	RF10	LT265/65R17
	Dynapro AT-M	RF10	LT265/65R17
Ranger ('21-'23)	Dynapro AT-M	RF10	LT265/65R17
	Dynapro AT-M	RF10	LT265/65R17

* Data based on March 2025

About Hankook
ION

Ventus
Kinergy
Weatherflex
Dynapro

Winter
Vantra

Hankook OE Supply

CHEVROLET

Vehicle Model	Product Name	Pattern	Size
Equinox ('17-'20)	Ventus S1 noble 2	H452	235/50R19
Sonic ('11-'20)	Optimo H428	H428	P195/65R15
Trax ('23-'29)	Dynapro HP2	RA33	225/60R17
Trailblazer ('20-'26)	Dynapro AT2	RF11	225/60R17

GMC

Vehicle Model	Product Name	Pattern	Size
Equinox ('17-'24)	Kinergy GT	H436	235/50R19
GMC Terrain ('17-'24)	Kinergy GT	H436	235/50R19

TESLA

Vehicle Model	Product Name	Pattern	Size
Model Y ('20-'28)	Ventus S1 evo 3 ev	K127E	255/45R19
Model Y ('23-'24)	iON evo AS SUV	IH01A	255/35R21
	iON evo AS SUV	IH01A	275/35R21
Model 3 ('18-'23)	Ventus S1 evo 3	K127	235/40R19
Model 3 ('21-'23)	Kinergy GT	H436	235/45R18
Model 3 ('21-'27)	Ventus S1 AS	H125	235/45R18
	Kinergy GT	H436	235/45R18

RIVIAN

Vehicle Model	Product Name	Pattern	Size
Electric Delivery Van ('21-'25)	Dynapro HT	RH12	LT245/70R17

TOYOTA

Vehicle Model	Product Name	Pattern	Size
Camry ('17-'24)	Kinergy GT	H436	235/45R18
Corolla ('13-'18)	Optimo H426	H426	195/65R15
Corolla ('19-'25)	Kinergy GT	H436	205/55R16
Tacoma ('15-'23)	Dynapro HT	RH12	P245/75R16

HONDA

Vehicle Model	Product Name	Pattern	Size
Accord ('17-'27)	Kinergy GT	H436	225/50R17
Civic_4DR ('15-'24)	Kinergy GT	H436	215/55R16
Civic_5DR ('21-'24)	Kinergy GT	H436	215/55R16
Clarity ('24-'29)	Kinergy GT	H436	235/60R18
CR-V ('16-'27)	Kinergy GT	H436	235/65R17
	Kinergy GT	H436	235/60R18
HR-V ('22-'27)	Kinergy GT	H436	215/60R17
	Kinergy GT	H436	225/55R18
Pilot ('22-'28)	Dynapro HP2	RA33	255/60R18

NISSAN

Vehicle Model	Product Name	Pattern	Size
Altima ('13-'18)	Optimo H426	H426	P215/60R16
Altima ('18-'25)	Kinergy GT	H436	215/60R16
	Kinergy GT	H436	235/40R19
Frontier ('15-'21)	Dynapro AT-M	RF10	P265/75R16
	Dynapro HT	RH12	P265/60R18
Frontier ('21-'27)	Dynapro HT	RH12	P265/70R16
	Dynapro AT2	RF11	265/70R17
Pathfinder ('21-'26)	Dynapro HP2	RA33	255/50R20
Pathfinder ('23-'28)	Dynapro HP2	RA33	255/60R18
Rogue ('13-'20)	Dynapro HT	RH12	225/65R17
Rogue ('17-'20)	Dynapro HT	RH12	225/65R17
Rogue ('20-'26)	Dynapro HP2	RA33	235/60R18
Sentra ('19-'23)	Kinergy GT	H436	205/60R16
Sentra ('19-'25)	Kinergy GT	H436	215/45R18

INFINITI

Vehicle Model	Product Name	Pattern	Size
QX60 ('23-'28)	Dynapro HP2	RA33	255/60R18

VOLKSWAGEN

Vehicle Model	Product Name	Pattern	Size
Beetle ('14-'19)	Kinergy GT	H436	215/60R16
	Kinergy GT	H436	215/55R17
	Kinergy GT	H436	235/45R18
Golf ('14-'18)	Kinergy GT	H436	225/45R17
	Ventus S1 noble 2	H452	225/40R18
Golf ('15-'19)	Kinergy GT	H436	205/55R16
Golf ('20-'25)	Ventus S1 evo 3	K127	235/35R19
Golf R/GTI ('20-'25)	Ventus S1 evo 3	K127	235/35R19
Jetta ('15-'19)	Kinergy GT	H436	205/55R16
Jetta ('17-'20)	Kinergy GT	H436	205/60R16
Jetta ('17-'23)	Kinergy GT	H436	225/45R18
Jetta GLI ('23-'29)	Kinergy GT	H436	225/45R18
	Kinergy GT	H436	215/60R16
Passat ('14-'19)	Kinergy GT	H436	215/55R17
	Kinergy GT	H436	235/45R18
ID.4 ('20-'29)	Kinergy AS X ev	EH01A	235/55R19
	Kinergy AS X ev	EH01A	255/50R19
T7 ('24-'28)	Ventus evo SUV	K137A	235/50R18
Taos ('21-'22)	Kinergy GT	H436	225/55R17
Tiguan R ('20-'24)	Ventus S1 evo 2 SUV	K117A	255/40R20
	Ventus S1 evo 3 SUV	K127A	255/35R21
Tiguan R-Line ('17-'21)	Ventus S1 noble 2	H452	255/45R19
	Ventus S1 noble 2	H452	255/40R20

* Data based on March 2025

MINI

Vehicle Model	Product Name	Pattern	Size
Clubman ('20-'25)	Ventus S1 evo 3	K127B	225/45R17
	Ventus Prime 4	K135	195/55R16
	Ventus S1 evo 3	K127B	205/45R17
	Kinergy XP	H446	215/45R17
	Ventus Prime 4	K135	215/45R17
	Ventus S1 evo 3	K127	215/40R18
Cooper ('24-'30)	Ventus S1 evo 3	K127	215/40R18
	Optimo H426	H426	175/65R15
	Optimo H426	H426B	195/55R16
	Optimo H426	H426B	205/45R17
	Kinergy eco 2	K435	175/65R15
	Ventus Prime 3	K125	195/55R16
Cooper 3Door / 5Door / Convertible ('13-'24)	Ventus Prime 3	K125B	195/55R16
	Ventus S1 evo 3	K127	205/45R17
	Ventus S1 evo 3	K127B	205/45R17
	Cooper JCW GP 3 ('20-'22)	K129	225/35R18
Countryman ('14-'20)	Ventus S1 noble 2	H452	225/55R17

HYUNDAI

Vehicle Model	Product Name	Pattern	Size
Azera ('16-'21)	Ventus S1 noble 2	H452	245/45R18
Elantra ('10-'15)	Optimo H426	H426	P215/45R17
Elantra ('15-'18)	Kinergy GT	H436	195/65R15
Elantra ('15-'18)	Kinergy GT	H436	205/55R16
Elantra ('15-'20)	Ventus S1 noble 2	H452	225/40R18
Elantra ('20-'26)	Kinergy GT	H436	195/65R15
Elantra ('20-'26)	Kinergy GT	H436	225/45R17
Elantra GT ('16-'20)	Ventus S1 noble 2	H452	225/40R18
Elantra HEV ('20-'26)	Kinergy GT	H436	225/45R17
Elantra N line ('20-'26)	Ventus S1 AS	H125	235/40R18
Ioniq 6 ('22-'28)	Ventus S2 AS	H462	225/55R18
Kona ('17-'20)	Kinergy GT	H436	215/55R17
Kona ('17-'24)	Kinergy GT	H436	205/60R16
Kona ('17-'24)	Ventus S1 noble 2	H452	235/45R18
Kona ('20-'23)	Kinergy GT	H436	215/55R17
Palisade ('20~24)	Ventus S1 noble 2	H452	245/50R20
Santa Fe ('18-'20)	Dynapro HP2	RA33	235/65R17
Santa Fe ('18-'20)	Dynapro HP2	RA33	235/60R18
Santa Fe ('20-'21)	Dynapro HP2	RA33	235/55R19
Santa Fe ('20-'23)	Dynapro HP2	RA33	235/60R18
Sonata ('14-'18)	Kinergy GT	H436	205/65R16
Sonata ('14-'19)	Kinergy GT	H436	215/55R17
Tucson ('15-'21)	Kinergy GT	H436	225/60R17
Venue ('19-'24)	Kinergy GT	H436	185/65R15

KIA

Vehicle Model	Product Name	Pattern	Size
Cadenza ('16-'21)	Ventus S1 noble 2	H452	245/45R18
Carnival ('20-'26)	Dynapro HP2	RA33	235/65R17
EV3 ('24-'30)	iON evo AS	IHO1	215/50R19
EV9 ('23-'29)	iON evo AS SUV	IHO1A	285/45R21
Optima ('15-'19)	Kinergy GT	H436	205/65R16
Sedona ('14-'20)	Dynapro HP2	RA33	235/60R18
Sedona ('14-'21)	Dynapro HP2	RA33	235/65R17
	Kinergy GT	H436	205/60R16
Soul ('18-'25)	Kinergy GT	H436	215/55R17
	Ventus S1 noble 2	H452	235/45R18
Sorento ('14-'20)	Dynapro HP2	RA33	235/55R19
Sorento ('15-'21)	Dynapro HP2	RA33	235/65R17
Sportage ('15-'21)	Kinergy GT	H436	225/60R17
Sportage ('21-'26)	Kinergy GT	H436	245/45R19
Sportage ('21-'26)	Dynapro HP2	RA33	235/65R17

SMART

Vehicle Model	Product Name	Pattern	Size
ForTwo Brabus Coupe/Cabriolet	Ventus V4 ES	H105	175/55R15
ForTwo Brabus Coupe/Cabriolet (Rear)	Ventus V4 ES	H105	215/35R17

RAM

Vehicle Model	Product Name	Pattern	Size
1500 ('16-'24)	Dynapro HT	RH12	P275/60R20

* Data based on March 2025

About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra





iON

CAR / SUV

iON evo AS | IH01

iON evo AS SUV | IH01A

iON HT | IHT01

iON evo | IK01

iON evo SUV | IK01A

iON i*cept | IW01

iON i*cept SUV | IW01A

iON Nordic ice | IW04

iON Nordic ice SUV | IW04A

About Hankook

Product Overview

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Smart

Why do electric vehicles need specialized tires?

EV Features

Quiet Operation

Heavy Battery
(up to 30% weight increase)

High Instant Torque

- **Long Charging Time** (0.5 to 8 hrs)
- **Travels <400 to 500km / charge**

EV Tire Requirements

Low Noise
for Comfortable Driving

Longer Tread Life
for Load Capacity

High Grip
for Rapid Acceleration and Braking

Low Rolling Resistance
for Reduced Energy Loss



ION INNOVATIVE™
TECHNOLOGY

ION INNOVATIVE™ TECHNOLOGY



i Sound Absorber



i Super Mileage



i Perfect Grip



i Extreme Lightness

ION



About Hankook
Product Overview

ion

Ventus

Kinergy

Dynapro

Winter

Vantra

Smart

Why EV needs EV specific tire


Hankook Tire secured **326** EV technology patents,
58 of which are used exclusively in iON

 **Sound Absorber**
9 patents

 **Super Mileage**
11 patents


Noise Guard
Zig-zag
8 patents

EP Application No. :
20206989.4 and 7 others



Round Even
1 patent

KR Application No. :
10-2021-0004477




Noise Guard
Cornhusk
1 patent

KR Application No. :
10-2021-0079351



ProDurable
Compound
10 patents

EP Application No. :
18206108.5 and 9 others



max **18%**
Noise Reduction



max **15%**
Longer Tread Life

ION INNOVATIVE™
TECHNOLOGY

About Hankook

Product Overview

ION

Ventus

Kinergy

Dynapro

Winter

Vantra

Smart

i Perfect Grip
23 patents

i Extreme Lightness
15 patents


Grip Claw
8 patents

EP Application No. :
23157987.1 and 7 others




ProGrip Compound
15 patents

EP Application No. :
19203083.1 and 14 others



ProCoupling Compound
15 patents

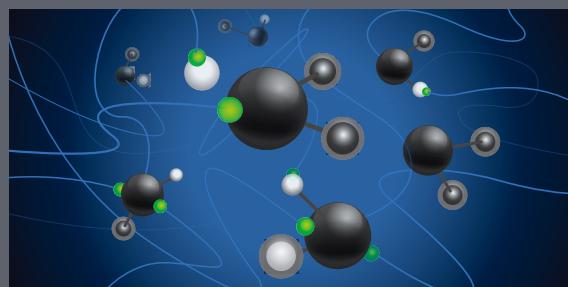

EP Application No. : 20185285.2 and 14 others



max **6%** increased
Battery Range



max **10%** improved
Driving Stability

Product Line-up

The iON Family

EV
exclusive
tire

ion evo AS
ion evo AS SUV

All-Season

ion HT

Highway Terrain

NEW

19

ION evo
ION evo SUV

Summer Sport

ION i*cept
ION i*cept SUV

Winter Studless

ION Nordic i*ce
ION Nordic i*ce SUV

Winter Nordic
Stud



ION evo AS (IH01)

ION evo AS SUV (IH01A)

EVolutionized to perform and last



EV
exclusive
tire



Test & Design award



reddot winner 2023
vehicle accessories design

Warranty



* Available for EVs

Drive in Peace

Sound Absorber

Minimized tread pattern noise

Noise Guard


The iON evo AS (and SUV)'s knurling technology applied inside the grooves effectively reduces tread pattern noise during road contact by narrowing the air path, without losing the groove's intended features.



Opti Pitch



Tire noise can be drastically reduced by optimizing the pitch sequence. iON evo AS (and SUV) has optimized the number and size of pitches to listen more to what matters.

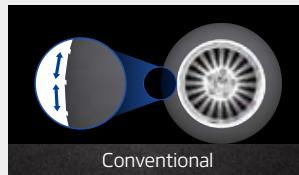


Hold Tight, Stay Strong

Perfect Grip

Enhanced cornering stability

Grip Boost

To bear weight of electric vehicles, tire stiffness is essential to improve. Hankook's EV Contour Technology increases lateral rigidity by 25%, and cornering rigidity by 20% compared to all-season touring tires for ICEs, to advance electric vehicle grip performance.

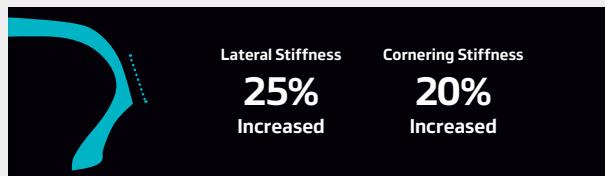

Go Further for More Experience

Extreme Lightness

Further reduced rolling resistance

Opti Cure


Thanks to Hankook's advanced compound and optimized curing technology, the rolling resistance is reduced to drive a long distance with a longer-lasting battery.



Super Mileage

Extended tread life

Produrable Compound

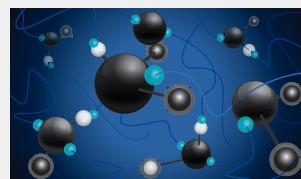

Composed with high-concentration silica and eco-friendly materials, the EVolution compound provides satisfactory mileage and improves wet performance.

Even tread wear

Round Even

Tires equipped on electric vehicles wear out approximately 20% faster with uneven wear than on ICE vehicles. Designed to spread the ground pressure evenly, the iON evo AS (and SUV) provides longer usage and less replacement.



ION HT (IHT01)
EV Endurance for the Long Haul



EV
exclusive
tire



Warranty

80K
mile

LIMITED
TREADWEAR
WARRANTY


* Available for EVs

Engineered to Take You Further


Super Mileage

Round Even Technology


Maximize mileage by maintaining uniform road contact pressure through balanced load distribution and an optimized footprint.

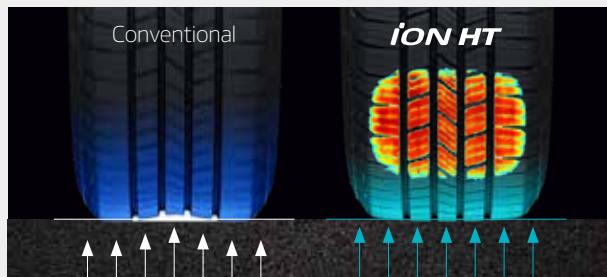

Opti Tread Technology




Improve mileage by minimizing uneven tread wear with block-specific rigidity optimization.

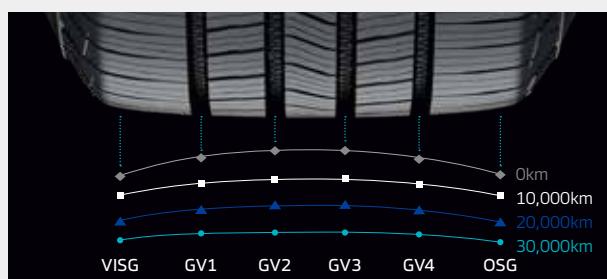

ProDurable Compound


Enhance wear performance by minimizing friction through advanced polymer flexibility and optimized silica dispersion technology.

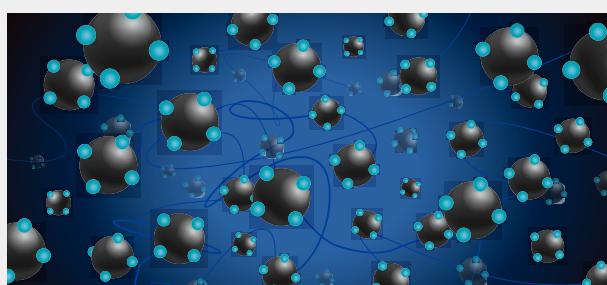

Extreme Lightness

Opti Cure Technology

Extend the range of your EV by minimizing energy loss during rotation with low-temperature curing.

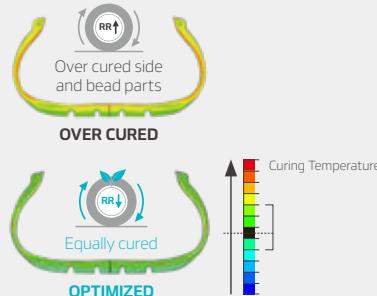

Roll Lite Compound

Boost efficiency with reduced internal tire friction through the application of LRR-specific rim cushion and sub-tread compounds.



Perfect Grip

New 3D-Embossed Sipe

Enhance traction with innovative New 3D-Embossed Sipe for superior braking performance.



iON evo (IK01)

iON evo SUV (IK01A)

Evolutionized to perform more



EV
exclusive
tire



Test & Design award



 **reddot** winner 2023
vehicle accessories design



Charge Less, Cruise More

Extreme Lightness

Low rolling resistance (LRR)

Opti Cure

The iON evo achieved the highest grade in low rolling resistance (LRR) by utilizing a specialized compound and an optimized curing process, which ensures uniform performance across the entire tire.




Drive in Peace

Sound Absorber

Minimized tread pattern noise

Opti Pitch

Tire noise can be drastically reduced by optimizing the pitch sequence. The iON evo (and SUV) has optimized the number and size of pitches to listen more to what matters.

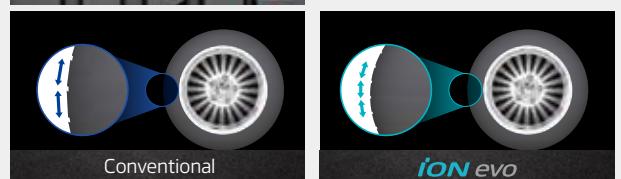


Go Further for More Experience

Super Mileage

Extended tread life

Produrable Compound

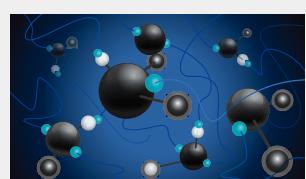


Composed with high-concentration silica and eco-friendly materials, the EVOlution compound provides satisfactory mileage and further reduced rolling resistance.

Be in Complete Control

Perfect Grip

Enhanced cornering stability

Grip Boost

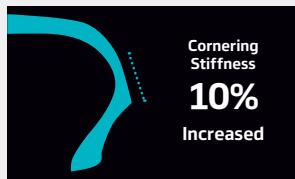

Tire stiffness is essential to be improved to bear the weight of electric vehicles. Hankook's EV Contour Technology increases cornering stiffness by 10% to advance electric vehicle handling performance.

Improved steering at high speeds

Aramid hybrid reinforcement belt



A reinforcement belt mixed with the most advanced fiber, Aramid, is applied on the iON evo (and SUV) to improve steering performance and maintain an optimized shape during high-speed driving.

Excellent traction

Extended shoulder blocks with optimized rigidity




To prevent slippage caused by the high torque of electric vehicles, the pattern block rigidity is optimized with extended outside shoulder blocks for maximum road contact.

Grip Maintained in the Rain

Enhanced Wet Grip

Wet Performance Without Missing Noise Reduction

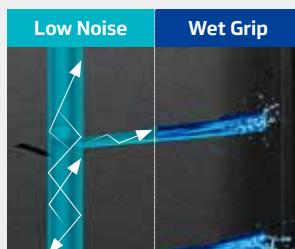

Expanding lateral grooves

The lateral grooves are designed narrower on the inside to reduce air-pumping noise, and wider on the outside to secure wet performance. This is another double advantage of the iON evo (and SUV).

ION i*cept (IW01)
ION i*cept SUV (IW01A)

EVolutionised to perform more in winter



Test & Design award



reddot winner 2023
vehicle accessories design


Drive in Peace

Sound Absorber

Minimized cavity noise


Noise Guard

The iON i*cept (and SUV)'s knurling technology applied inside the grooves effectively reduces resonance noise during road contact by narrowing the air path, without losing the groove's intended features.

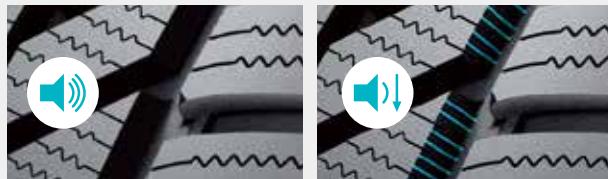

Multi-pitch optimization

Tire noise can be drastically reduced by optimizing the pitch sequence. The iON i*cept (and SUV) has optimized the number and size of pitches to listen more to what matters.

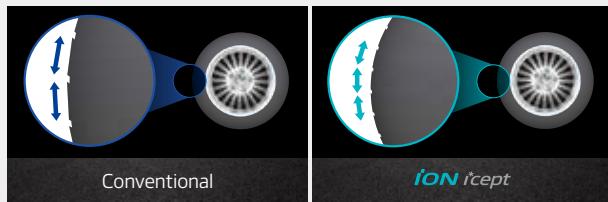

Charge Less, Cruise More

Extreme Lightness

Further reduced rolling resistance

Opti Cure

The iON i*cept (and SUV) achieved a decent grade in LRR performance by applying an advanced compound and Hankook tire's optimized curing technology which improves all parts of the tire equally.




Handle the Winter

Perfect Grip

Enhanced cornering stability

Grip Boost

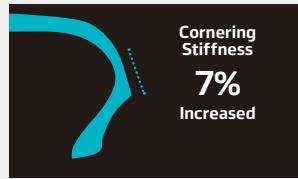

Tire stiffness is essential to be improved to bear the weight of electric vehicles. Hankook's EV Contour Technology increases cornering stiffness by 7% to advance electric vehicle handling performance.

Improved snow traction

Optimized sipe angles




The angles of sipes on the iON i*cept (and SUV) are optimized to improve braking and traction on snow. The accuracy of sipe angles can significantly improve safety on snowy roads.

Superior handling on winter roads

Diversified sipes

The tread pattern rigidity is optimized by applying 2D sipes in the center and 3D sipes in the blocks surrounding. This allows the iON i*cept (and SUV) to provide superior handling on all types of winter road surfaces.

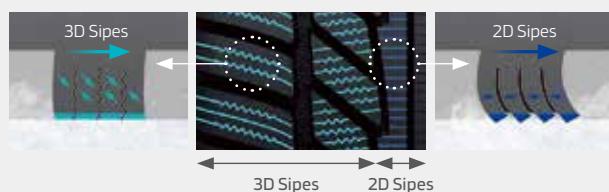

Improved wet grip

Water pipe kerf



Water pipe kerfs are placed inside the shoulder blocks for water drainage from the main groove, which maximizes grip on wet roads.

ION Nordic ice * (IW04)

ION Nordic ice SUV (IW04A)

EVolutionized to perform in extreme winter conditions



EV
exclusive
tire



Drive in Peace

Sound Absorber

Minimized Stud noise

Stud Noise AI Analysis

The iON Nordic ice (and iON Nordic ice SUV) emits lower stud noise given it's optimal stud pin array by applying AI calculations.



2% less
than Market standard product for ICEV

Minimized Pattern Noise

V-Shaped Shifting Pattern



The V-shaped tread pattern of the iON Nordic ice (and iON Nordic ice SUV) spreads road noise by the shifting between the inside and outside blocks during road contact.

4dB less
than Market standard product for ICEV

Go Further to Experience More

Extreme Lightness

Extended Range and Even Tread Wear

Lightweight & Opti Cure

The iON Nordic ice (and iON Nordic ice SUV) achieves better LRR performance by applying lightweight design technology and Hankook tire's Opti Cure technology.




Be in Complete Control in Winter

Perfect Grip

Excellent Grip in Icy Conditions

Optimized Stud Pins

By maximizing the number of studs driver will experience improved ice grip performance.

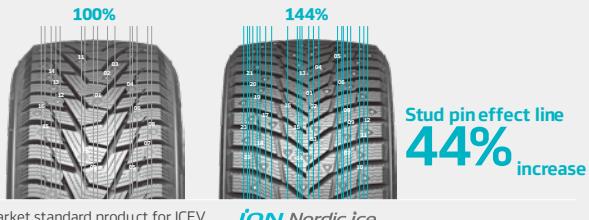

Market standard product for ICEV iON Nordic ice

Advanced Handling in Snowy Conditions

High Density + One Directional Sipe

Experience improved snow traction & braking as a result of high density and the one directional sipe on the center block.



Super Mileage

Extended Range and Even Tread Wear

Lightweight & Opti Cure

Tires on electric vehicles wear out approximately 20% faster with uneven wear than on ICE vehicles. Designed to spread the ground pressure evenly, the iON Nordic ice (and iON Nordic ice SUV) ensures longer usage and requires fewer replacements.



and Hankook tire's Opti Cure technology.

Inch	S-Code	Size	LI/SS	Sidewall	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	Original Equipment	
					Rim Width Range	psi	lbs								
18	1034220	225/55R18	XL	102W	BSW	6.0-8.0	50	1,874	27.7	9.4	10.0	749	26.7	600/A/A	EV, SOA
	1033208	235/45R18	XL	98W	BSW	7.5-9.0	50	1,653	26.2	9.3	10.0	792	24.4	600/A/A	EV, SOA
19	1032966	215/50R19	XL	97H	BSW	6.0-7.5	50	1,609	27.4	9.5	9.0	759	24.3	600/A/A	EV, SOA
	1033204	235/40R19	XL	96W	BSW	8.0-9.5	50	1,565	26.2	9.5	10.0	794	22.6	600/A/A	EV, SOA
20	1034360	255/40R19	XL	100Y	BSW	8.5-10.0	50	1,764	26.8	10.2	10.0	775	26.2	600/A/A	EV, SOA
	1034384	285/40R19	XL	107Y	BSW	9.5-11.0	50	2,149	27.8	11.3	10.0	747	30.6	600/A/A	EV, SOA
21	1034368	245/40R19	XL	98Y	BSW	8.0-9.5	50	1,653	26.5	9.7	9.0	784	25.9	600/A/A	EV, SOA
	1033203	245/45R19	XL	102W	BSW	7.5-9.0	50	1,874	27.6	9.6	10.0	754	27.2	600/A/A	EV, SOA
20	1033206	235/35R20	XL	92Y	BSW	8.0-9.5	50	1,389	26.3	9.5	10.0	791	22.4	600/A/A	EV, SOA
	1034367	245/40R20	XL	99W	BSW	8.0-9.5	50	1,709	27.4	9.8	10.0	758	25.4	600/A/A	EV, SOA
21	1034218	255/35R20	XL	97Y	BSW	8.5-10.0	50	1,609	26.8	10.2	10.0	775	25.4	600/A/A	EV, SOA
	1034216	285/30R20	XL	99Y	BSW	9.5-10.5	50	1,709	26.6	11.4	10.0	782	28.7	600/A/A	EV, SOA
21	1033205	245/35R21	XL	96Y	BSW	8.0-9.5	50	1,565	27.5	9.8	10.0	755	24.4	600/A/A	EV, SOA
	1033207	265/35R21	XL	101Y	BSW	9.0-10.5	50	1,819	28.1	10.6	10.0	740	27.2	600/A/A	EV, SOA
22	1034363	265/40R21	XL	105Y	BSW	9.0-10.5	50	2,309	29.0	10.6	10.0	716	30.4	600/A/A	EV, SOA
	1034533	295/30R21	XL	102Y	BSW	10.0-11.0	50	1,874	27.8	11.8	10.0	748	31.3	600/A/A	EV, SOA

Inch	S-Code	Size	LI/SS	Sidewall	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	Original Equipment	
					Rim Width Range	psi	lbs								
17	1032883	215/50R17	XL	95V	BSW	6.5-7.5	50	1,521	25.4	9.2	10.0	819	22.0	600/A/A	EV, SOA
	1033187	225/60R18	XL	104V	BSW	6.0-8.0	50	1,984	28.4	9.4	10.0	730	29.5	600/A/A	EV, SOA
18	1034369	235/55R18	XL	104W	BSW	6.5-8.5	50	1,984	28.2	9.8	10.0	737	29.8	600/A/A	EV, SOA
	1033170	235/60R18	XL	107V	BSW	6.5-8.5	50	2,149	29.2	9.8	10.0	710	32.1	600/A/A	EV, SOA
19	1033186	225/55R19	XL	103V	BSW	6.0-8.0	50	1,929	28.6	9.4	10.0	727	29.6	600/A/A	EV, SOA
	1032882	235/50R19	XL	103W	BSW	6.5-8.5	50	1,929	28.2	10.1	10.0	737	29.7	600/A/A	EV, SOA
20	1033214	235/55R19	XL	105V	BSW	6.5-8.5	50	2,039	29.1	9.8	10.0	713	31.1	600/A/A	EV, SOA
	1033215	255/45R19	XL	104W	BSW	8.0-9.5	50	1,984	28.0	10.0	10.0	742	30.0	600/A/A	EV, SOA
21	1034327	255/50R19	XL	101V	BSW	7.0-9.0	50	2,149	29.0	11.1	10.0	715	31.5	600/A/A	EV, SOA
	1034362	255/55R19	XL	111Y	BSW	7.0-9.0	50	2,403	30.0	10.7	10.0	693	35.3	600/A/A	EV, SOA
22	1033164	255/60R19	XL	113V	BSW	7.0-9.0	50	2,535	31.0	10.6	10.0	670	37.5	600/A/A	EV, SOA
	1034219	235/45R20	XL	100W	BSW	7.5-9.0	50	1,764	28.3	9.3	10.0	735	27.6	600/A/A	EV, SOA
23	1033209	235/50R20	XL	104W	BSW	6.5-8.5	50	1,984	29.2	10.1	10.0	712	31.1	600/A/A	EV, SOA
	1034312	235/60R20	XL	108V	BSW	6.5-8.5	50	2,205	31.1	9.6	10.0	668	33.8	600/A/A	EV, SOA
24	1033185	245/45R20	XL	103Y	BSW	7.5-9.0	50	1,929	28.5	9.6	10.0	729	30.6	600/A/A	EV, SOA
	1033165	255/40R20	XL	101W	BSW	8.5-10.0	50	1,819	27.9	10.2	10.0	743	28.4	600/A/A	EV, SOA
25	1035067	255/40R20	XL	101V	BSW	8.5-10.0	50	1,819	28.0	10.3	8.5	743	26.8	540/A/A	EV, SOA
	1035068	255/40R20	XL	101V	BSW	8.5-10.0	50	1,819	28.0	10.3	8.5	743	26.2	540/A/A	EV
26	1035069	255/40R20	XL	101V	BSW	8.5-10.0	50	1,819	28.0	10.3	8.5	743	27.3	540/A/A	EV, SOA
	1033168	255/45R20	XL	105Y	BSW	8.0-9.5	50	2,039	29.0	10.0	10.0	717	31.8	600/A/A	EV, SOA
27	1034365	255/50R20	XL	109W	BSW	7.0-9.0	50	2,271	30.0	10.8	10.0	693	34.4	600/A/A	EV, SOA
	1033171	265/45R20	XL	108V	BSW	8.5-10.0	50	2,205	29.2	10.4	10.0	710	33.1	600/A/A	EV, SOA
28	1032970	265/50R20	XL	111Y	BSW	7.5-9.5	50	2,403	30.2	10.9	9.5	687	35.6	600/A/A	EV, SOA
	1033172	275/45R20	XL	110V	BSW	8.5-10.5	50	2,337	29.6	11.0	10.0	701	34.5	600/A/A	EV, SOA
29	1033212	275/50R20	XL	113V	BSW	7.5-9.5	50	2,535	30.9	11.7	10.0	673	36.6	600/A/A	EV, SOA
	1033167	235/45R21	XL	101Y	BSW	7.5-9.0	50	1,819	29.1	9.3	10.0	714	29.3	600/A/A	EV, SOA
30	103702	255/35R21	XL	98W	BSW	8.5-10.0	50	1,653	27.8	10.2	10.0	748	28.6	600/A/A	EV, SOA
	1033202	255/40R21	XL	102Y	BSW	8.5-10.0	50	1,874	28.9	10.2	10.0	718	29.7	600/A/A	EV, SOA
31	1034217	255/50R21	XL	109Y	BSW	7.0-9.0	50	2,271	31.0	10.8	10.0	670	35.9	600/A/A	EV, SOA
	1034366	265/45R21	XL	108Y	BSW	8.5-10.0	50	2,205	30.2	10.4	10.0	689	34.3	600/A/A	EV, SOA
32	1033704	275/35R21	XL	103W	BSW	9.0-11.0	50	1,929	28.3	10.9	10.0	733	31.6	600/A/A	EV, SOA
	1034359	275/40R21	XL	107Y	BSW	9.0-11.0	50	2,149	29.5	10.9	10.0	705	32.5	600/A/A	EV, SOA
33	1033166	285/40R21	XL	109H	BSW	9.5-11.0	50	2,271	29.7	11.3	10.0	699	33.8	600/A/A	EV, SOA
	1031525	285/45R21	XL	113V	BSW	9.0-10.5	50	2,535	30.9	11.5	9.0	673	37.1	600/A/A	Kia EV9 ('23-'29)
34	1032971	285/45R21	XL	113Y	BSW	9.0-10.5	50	2,535	30.9	11.0	9.5	673	35.6	600/A/A	Lucid Gravity ('24-'28)
	1033210	265/35R22	XL	102W	BSW	9.0-10.5	50	1,874	29.1	10.6	10.0	713	30.9	600/A/A	EV, SOA
35	1034361	275/40R22	XL	107Y	BSW	9.0-11.0	50	2,149	30.5	10.9	9.0	681	35.4	600/A/A	EV, SOA
	1034454	275/40R22	XL	107H	BSW	9.0-11.0	50	2,149	30.4	11.1	9.5	683	33.8	460/A/A	EV, SOA
36	1034455	275/40R22	XL	107H	BSW	9.0-11.0	50	2,149	30.4	11.1	9.5	683	33.0	460/A/A	EV
	1033211	285/35R22	XL	106W	BSW	9.5-11.0	50	2,094	29.8	11.3	10.0	697	33.6	600/A/A	EV, SOA

iON HT | IHT01

EV Highway Terrain

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	
						psi	lbs								
18	1036115	275/65R18	XL	116H	BSW	7.5-9.5	50	2,756	32.1	11.1	12.5	648	41.3	900/A/A	EV
20	1036112	275/60R20	XL	116T	BSW	7.5-9.5	50	2,756	33.0	11.4	12.5	630	43.7	900/A/A	EV
	1036113	275/65R20	XL	116H	BSW	7.5-9.5	50	2,756	34.1	11.1	12.5	610	44.2	900/A/A	EV
21	1036114	275/55R21	XL	116H	BSW	7.5-9.5	50	2,756	32.8	11.6	12.0	634	44.0	900/A/A	EV
22	1036116	HL275/50R22	XL	116H	BSW	7.5-9.5	50	2,756	32.7	11.8	11.5	636	43.4	900/A/A	EV

iON evo | IK01

High Performance EV

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	Original Equipment
						psi	lbs								
18	1033445	235/45ZR18	XL	98W	BSW	7.5-9.0	50	1,653	26.1	9.3	8.5	795	23.0	320/AA/A	EV, SOA
19	1031912	225/55R19	XL	103H	BSW	6.0-8.0	50	1,929	28.8	9.9	8.0	721	24.6	320/A/A	EV
	1033432	245/45ZR19	XL	102Y	BSW	7.5-9.0	50	1,874	27.5	10.0	8.5	754	26.6	320/AA/A	EV, SOA
	1031913	245/50R19	XL	105H	BSW	7.0-8.5	50	2,039	28.7	10.0	8.0	725	27.6	300/A/A	EV
20	1033439	235/35ZR20	XL	92Y	BSW	8.0-9.5	50	1,389	26.3	9.6	8.5	789	22.8	320/AA/A	EV, SOA
	1033441	245/45ZR20	XL	103Y	BSW	7.5-9.0	50	1,929	28.5	9.7	8.5	729	27.8	320/AA/A	EV, SOA
	1033437	285/40ZR20	XL	108Y	BSW	9.5-11.0	50	2,205	28.8	11.3	8.5	721	31.3	320/AA/A	EV, SOA
21	1033440	245/35ZR21	XL	96Y	BSW	8.0-9.5	50	1,565	27.6	9.8	8.5	753	25.0	320/AA/A	EV, SOA
	1034660	245/40R21	XL	100Y	BSW	8.0-9.5	50	1,764	28.7	10.2	8.5	724	27.3	TBD	EV, SOA
	1032085	245/40R21	XL	100Y	BSW	8.0-9.5	50	1,764	28.7	10.6	8.5	724	28.8	320/A/A	EV, SOA
	1033454	265/35ZR21	XL	101Y	BSW	9.0-10.5	50	1,819	28.1	10.6	8.5	738	27.4	320/AA/A	EV, SOA
	1034661	275/35R21	XL	103Y	BSW	9.0-11.0	50	1,929	28.5	11.5	7.5	728	29.6	TBD	EV, SOA
	1032084	285/35R21	XL	105Y	BSW	9.5-11.0	50	2,039	28.5	12.0	8.0	728	32.8	320/A/A	EV, SOA
	1033451	305/30ZR21	XL	104Y	BSW	10.5-11.5	50	1,984	28.1	12.2	8.5	740	29.6	320/AA/A	EV, SOA

iON evo SUV | IK01A

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	Original Equipment
						psi	lbs								
18	1033433	235/65R18	XL	110V	BSW	6.5-8.5	50	2,337	29.8	9.5	8.5	697	30.1	320/AA/A	EV, SOA
19	1033452	235/55ZR19	XL	105Y	BSW	6.5-8.5	50	2,039	29.0	9.8	8.5	716	29.5	320/AA/A	EV, SOA
20	1033446	245/50R20	XL	105V	BSW	7.0-8.5	50	2,039	29.5	10.5	8.5	704	30.6	320/AA/A	EV, SOA
	1033434	255/40ZR20	XL	101W	BSW	8.5-10.0	50	1,819	27.9	10.2	8.5	746	27.1	320/AA/A	EV, SOA
	1033453	255/45ZR20	XL	105Y	BSW	8.0-9.5	50	2,039	28.9	10.1	8.5	720	29.3	320/AA/A	EV, SOA
21	1033450	255/35ZR21	XL	98W	BSW	8.5-10.0	50	1,653	27.8	10.2	8.5	746	27.2	320/AA/A	EV, SOA
	1033436	275/35ZR21	XL	103Y	BSW	9.0-11.0	50	1,929	28.4	10.9	8.5	731	28.4	320/AA/A	EV, SOA
22	1033449	255/40R22	XL	103V	BSW	8.5-10.0	50	1,929	29.9	10.2	8.5	696	29.9	320/AA/A	EV, SOA
	1031875	275/40R22	XL	107Y	BSW	9.0-11.0	50	2,149	30.4	11.1	7.5	683	32.0	320/A/A	EV, SOA
23	1031878	HL275/35R23	XL	108Y	BSW	9.0-11.0	50	2,205	30.3	11.1	8.0	685	31.8	340/A/A	EV, SOA
	1031879	HL275/35R23	XL	108Y	BSW	9.0-11.0	50	2,205	30.3	11.1	8.0	685	32.5	340/A/A	EV, SOA
															BMW iX ('25-'28)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

ION

Ventus

Winter

Vantra

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	Tech	
						psi	lbs							
18	1033369	215/55R18	SL	95H	BSW	6.0-7.5	51	1,521	27.1	9.2	10.5	767	23.5	EV, SOA, 3PMSF
	1033407	235/45R18	XL	98V	BSW	7.5-9.0	50	1,653	26.2	9.3	10.5	794	24.4	EV, SOA, 3PMSF
19	1033391	235/40R19	XL	96V	BSW	8.0-9.5	50	1,565	26.1	9.5	10.5	795	22.6	EV, SOA, 3PMSF
	1033396	275/45R19	XL	108V	BSW	8.5-10.5	50	2,205	28.7	11.1	10.5	725	32.4	EV, SOA, 3PMSF
20	1033402	225/55R19	XL	103V	BSW	6.0-8.0	50	1,929	28.7	9.4	10.5	725	27.7	EV, SOA, 3PMSF
	1033403	245/45R19	SL	98V	BSW	7.5-9.0	51	1,653	27.5	9.6	10.5	755	25.9	EV, SOA, 3PMSF
21	1034185	255/40R19	XL	100V	BSW	8.5-10.0	50	1,764	26.6	10.2	10.5	782	25.6	EV, SOA, 3PMSF
	1034199	235/50R19	XL	103V	BSW	6.5-8.5	50	1,929	28.2	10.1	10.5	737	29.2	EV, SOA, 3PMSF
22	1034208	245/40R19	XL	98V	BSW	8.0-9.5	50	1,653	26.6	9.8	10.5	782	24.9	EV, SOA, 3PMSF
	1033400	285/40R20	XL	108V	BSW	9.5-11.0	50	2,205	28.8	11.4	10.5	721	33.8	EV, SOA, 3PMSF
23	1033401	245/45R20	XL	103V	BSW	7.5-9.0	50	1,929	28.5	9.6	10.5	729	29.2	EV, SOA, 3PMSF
	1033405	235/35R20	XL	92V	BSW	8.0-9.5	50	1,389	26.2	9.5	10.5	793	23.0	EV, SOA, 3PMSF
24	1034187	255/35R20	XL	97V	BSW	8.5-10.0	50	1,609	26.5	10.2	10.5	785	25.7	EV, SOA, 3PMSF
	1034205	245/40R20	XL	99V	BSW	8.0-9.5	50	1,709	27.5	9.8	10.5	755	25.9	EV, SOA, 3PMSF
25	1033395	245/35R21	XL	96V	BSW	8.0-9.5	50	1,565	27.6	9.8	10.5	752	26.4	EV, SOA, 3PMSF
	1033404	305/30R21	XL	104V	BSW	10.5-11.5	50	1,984	28.0	12.3	10.5	741	32.8	EV, SOA, 3PMSF
26	1033406	265/35R21	XL	101V	BSW	9.0-10.5	50	1,819	28.2	10.7	10.5	737	28.3	EV, SOA, 3PMSF
	1034203	265/40R21	XL	105V	BSW	9.0-10.5	50	2,039	29.1	10.7	10.5	714	30.7	EV, SOA, 3PMSF
27	1034204	265/35R22	XL	102V	BSW	9.0-10.5	50	1,874	29.1	10.7	10.5	713	29.5	EV, SOA, 3PMSF

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	Tech	
						psi	lbs							
17	1034193	215/55R17	XL	98V	BSW	6.0-7.5	50	1,653	26.2	9.2	10.5	792	24.4	EV, SOA, 3PMSF
	1034197	235/55R18	XL	104V	BSW	6.5-8.5	50	1,984	28.1	9.8	10.5	740	28.7	EV, SOA, 3PMSF
18	1033382	235/60R18	SL	103H	BSW	6.5-8.5	51	1,929	28.9	9.6	10.5	719	28.6	EV, SOA, 3PMSF
	1033393	235/65R18	XL	110V	BSW	6.5-8.5	50	2,337	29.8	9.6	10.5	697	29.3	EV, SOA, 3PMSF
19	1033398	235/55R19	XL	105V	BSW	6.5-8.5	50	2,039	28.9	9.8	10.5	720	28.5	EV, SOA, 3PMSF
	1033383	255/45R19	XL	104V	BSW	8.0-9.5	50	1,984	27.9	10.0	10.5	744	30.9	EV, SOA, 3PMSF
20	1033381	255/50R19	XL	107H	BSW	7.0-9.5	50	2,149	28.9	11.0	10.5	718	30.6	EV, SOA, 3PMSF
	1033392	255/55R19	XL	111V	BSW	7.0-9.0	50	2,403	29.9	10.7	10.5	694	32.4	EV, SOA, 3PMSF
21	1034425	255/60R19	XL	113V	BSW	7.0-9.0	50	2,535	31.0	10.6	10.5	671	35.4	EV, SOA, 3PMSF
22	1034200	235/45R20	XL	100V	BSW	7.5-9.0	50	1,764	28.0	9.3	10.5	741	26.9	EV, SOA, 3PMSF
	1033390	235/50R20	SL	100V	BSW	6.5-8.5	51	1,764	29.1	10.1	10.5	713	29.5	EV, SOA, 3PMSF
23	1034188	235/60R20	XL	108V	BSW	6.5-8.5	50	2,205	31.0	9.6	10.5	669	32.7	EV, SOA, 3PMSF
	1033389	245/50R20	XL	105V	BSW	7.0-8.5	50	2,039	29.5	10.6	10.5	703	30.5	EV, SOA, 3PMSF
24	1033387	255/40R20	XL	101V	BSW	8.5-10.0	50	1,819	27.8	10.2	10.5	747	27.8	EV, SOA, 3PMSF
	1033399	255/45R20	XL	105V	BSW	8.0-9.5	50	2,039	28.9	10.0	10.5	718	32.4	EV, SOA, 3PMSF
25	1033375	255/50R20	XL	109H	BSW	7.0-9.0	50	2,271	29.9	11.0	10.5	694	32.5	EV, SOA, 3PMSF
	1034206	265/45R20	XL	108V	BSW	8.5-10.0	50	2,205	29.1	10.5	10.5	713	33.8	EV, SOA, 3PMSF
26	1034207	275/45R20	XL	110V	BSW	8.5-10.5	50	2,337	29.5	11.1	10.5	705	33.7	EV, SOA, 3PMSF
	1034424	275/50R20	XL	113V	BSW	7.5-9.5	50	2,535	30.6	11.7	10.5	679	37.4	EV, SOA, 3PMSF

iON i*cept SUV | IW01A

Winter Studless EV

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	Tech	
						psi	lbs							
21	1033384	235/45R21	XL	101V	BSW	7.5-9.0	50	1,819	29.1	9.3	10.5	713	28.2	EV, SOA, 3PMFS
	1033385	255/35R21	XL	98V	BSW	8.5-10.0	50	1,653	27.8	10.2	10.5	747	27.3	EV, SOA, 3PMFS
	1033397	255/40R21	XL	102V	BSW	8.5-10.0	50	1,874	28.8	10.2	10.5	721	29.0	EV, SOA, 3PMFS
	1033371	265/45R21	XL	108H	BSW	8.5-10.0	50	2,205	30.3	10.5	10.5	687	34.0	EV, SOA, 3PMFS
	1033388	275/35R21	XL	103V	BSW	9.0-11.0	50	1,929	28.4	10.9	10.5	732	31.0	EV, SOA, 3PMFS
	1034184	275/40R21	XL	107V	BSW	9.0-11.0	50	2,149	29.3	10.9	10.5	708	33.4	EV, SOA, 3PMFS
	1034183	285/40R21	XL	109V	BSW	9.5-11.0	50	2,271	29.7	11.3	10.5	699	35.4	EV, SOA, 3PMFS
	1034426	285/45R21	XL	113V	BSW	9.0-10.5	50	2,535	30.9	11.5	10.5	673	37.3	EV, SOA, 3PMFS
22	1033374	255/40R22	XL	103V	BSW	8.5-10.0	50	1,929	29.8	10.2	10.5	696	30.2	EV, SOA, 3PMFS
	1033376	265/40R22	XL	106H	BSW	9.0-10.5	50	2,094	30.1	10.7	10.5	689	32.3	EV, SOA, 3PMFS
	1034190	275/40R22	XL	107V	BSW	9.0-11.0	50	2,149	30.5	10.9	10.5	680	34.4	EV, SOA, 3PMFS
	1033386	285/35R22	XL	106V	BSW	9.0-10.5	50	2,094	29.7	11.4	10.5	700	34.4	EV, SOA, 3PMFS

iON Nordic Ice | IW04

Winter Studded EV

S-Code			Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight			
Inch	Non-Stud	Factory Stud					psi	lbs					Non-Stud	Factory Stud	Tech	
20	1034984	1035026	245/40R20	XL	99T	BSW	8.0-9.5	50	1,709	27.4	10.1	11.0	757	26.2	26.6	3PMFS

iON Nordic Ice SUV | IW04A

Winter Studded EV

S-Code			Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight			
Inch	Non-Stud	Factory Stud					psi	lbs					Non-Stud	Factory Stud	Tech	
19	1034977	1035028	235/40R19	XL	96T	BSW	8.0-9.5	50	1,565	26.1	9.8	11.0	795	24.2	24.7	3PMFS
	1035004	1035011	255/45R19	XL	104H	BSW	8.0-9.5	50	1,984	27.8	10.4	11.0	747	30.5	30.9	3PMFS
20	1034982	1035036	235/50R20	XL	104T	BSW	6.5-8.5	50	1,984	29.1	10.2	11.0	714	30.8	31.3	3PMFS
	1035005	1035013	245/45R20	XL	103T	BSW	7.5-9.0	50	1,929	28.4	9.9	11.0	732	29.3	29.7	3PMFS
	1034981	1035040	255/40R20	XL	101T	BSW	8.5-10.0	50	1,819	27.8	10.6	11.0	747	28.2	28.6	3PMFS
	1034987	1035030	255/45R20	XL	105T	BSW	8.0-9.5	50	2,039	28.7	10.4	11.0	723	31.6	32.1	3PMFS
	1035006	1035019	255/50R20	XL	109T	BSW	7.0-9.0	50	2,271	29.8	10.9	11.0	696	34.0	34.4	3PMFS

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters
Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.
Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

About Hankook

iON Ventus

Kinergy Weatherflex

Dynapro

Winter

Vantra





ventus

CAR / SUV

ventus evo | K137

ventus evo SUV | K137A

ventus V12 evo2 | K120

ventus S1 AS | H125

ventus V2 concept2 | H457

ventus S1 evo Z AS X | H129A

ventus ST | RH06

ventus AS | RH07

About Hankook

Product Overview

ION

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Smart

Product Line-up

The Ventus Family

ventus
evo

Ultra-High Performance
Summer

ventus
V12 evo²

Ultra-High Performance
Summer

NEW



ventus
S1 AS

Ultra-High Performance
All-Season

ventus
V2 concept²

High Performance
All-Season

ventus
S1 evo Z AS X

Ultra High Performance
All-Season for SUV



ventus evo (K137)
ventus evo SUV (K137A)

Unmatched Sports Performance




Warranty



Widening Lateral Grooves

Wet braking performance is improved by optimizing lateral shoulder grooves which secure voids when braking or under heavy loads, expanding the contact patch. Additionally, tie-bars applied to the shoulder blocks create a closed structure that reduces noise in regular driving conditions.

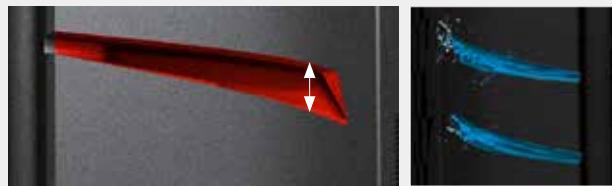


Chamfer Technology Improves Braking Traction and Uniformly Distributes Contact Pressure

Chamfered design smooths tire edges for evenly distributed contact pressure and increased friction. Dry braking performance is greatly improved, 6% over our previous model.

Dry Braking Improved by 6%

compared to its predecessor

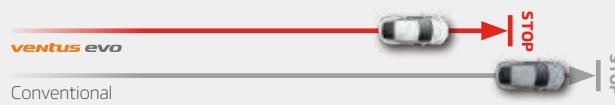

Optimized Stiffness Pattern



Maximized stiffness in the driving direction, particularly in the outside blocks, enhances grip on dry roads.

Superior Transverse Drainage

The high-performance drainage design controls block deformation to improve contact with the road. Safer wet road driving is achieved by minimizing tire contact gaps caused by concave deformation for 7% improved wet braking and 4% improved wet handling over the previous model.



Wet Handling Improved by 4%

compared to its predecessor



Enhanced Cornering Stability

The flat side profile improves cornering stiffness for superior grip and stability, even at high speeds.



Uniform Contact Distributes Pressure

Optimized tire shape and structure ensure balanced contact pressure distribution across the tread, promoting uniform wear and excellent mileage, even under heavy loads.

Mileage Improved by 32%

compared to its predecessor



ventus V12 evo² (K120)

Ultra-High Performance Summer




Aqua jet




Catalyst to channel water out of the center to the main groove wall effectively. Catalyst action in aqua jet groove.

Water-slide

Faster drainage water channel.

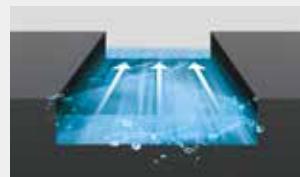

Conventional

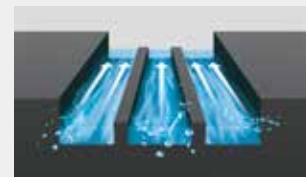


ventus V12 evo²

Cooling system

Increased contact area induces the rapid release of heat and ensures excellent performance in wet conditions.




Conventional

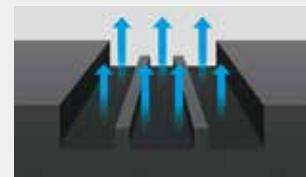

ventus V12 evo²

Stealth technology

Unique wing tip design reduces noise using 'Stealth technology'. Slanted edges support the blocks during handling where sounds or trembling hits. This slanted surface reduces impact.

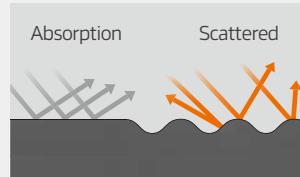

Slanted edge scatters incoming noise.

ventus V2 concept² (H457)

The new concept of driving



Aqua driving control



Wide 4-main grooves applied for better handling performance in wet conditions.

3D Point effect on block edge part



Optimal handling and braking ability by improving block solidity and applying 3D point effect on the block edge.

Optimal kerf design



Control noise and extend mileage with uniform block stiffness.

Noise care block applied



Control frictional noise with straight rib blocks on the shoulder.

Test & Design award



Warranty



High-density nylon reinforced belt structure

Optimal high-density nylon reinforced belt maintains contact pressure when cornering and maximises handling performance.



Expands the contact zone of the shoulder, compared to conventional tires, and improves handling performance.

ventus S1 AS (H125)
Experience the sheer joy of driving in any weather



Warranty




New four-season high performance compound

This is Hankook Tire's new four-season compound designed for high-performance vehicles. A high concentration of silica was added to enhance the grip force on all surface conditions (wet & dry & snow).




Excellent drainage in the transverse direction

It is designed to drain well while the block shape changes to convex during driving.

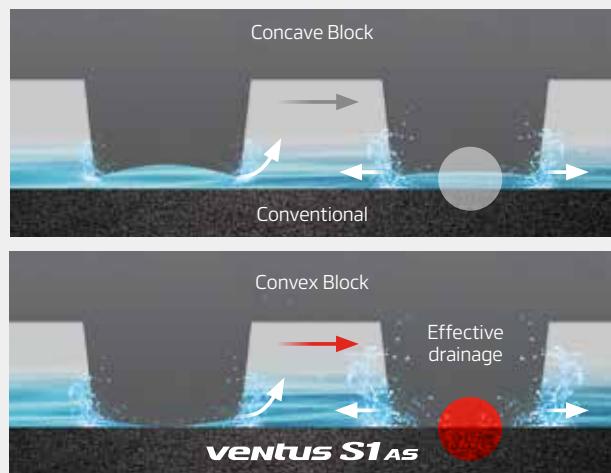

Applied shoulder chamfer

The shoulder chamfer maintains uniform grounding by suppressing the deformation of the block edge during driving. Uniform grounding improves dry performance by increasing grip on dry road surfaces.

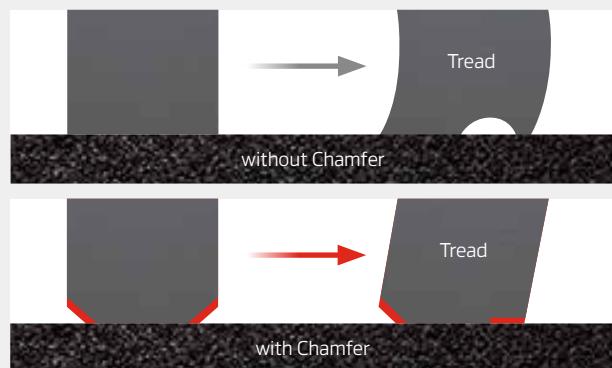

Wide outside block & high stiffness

Subjective dry handling test result



Dry handling performance is improved by the expanded outside shoulder block and increased lateral stiffness. A wider outside shoulder block ensures good dry handling performance, lateral stability, and steering response.



Wide lateral grooves



The 3% wider lateral grooves increase the void volume, which improves grip performance in the snow because it grabs more snow.

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load psi	Overall Diameter	Section Width	Tread Depth	Revs/ Mile	Weight	UTQG	Original Equipment Tech	
17	1031045	205/55R17	XL	95Y	BSW	5.5-7.5	50	1,521	25.5	9.0	8.0	813	20.1	200/A/A BMW 2 Series GT ('25-'29)
	1031265	225/50R17	XL	98Y	BSW	6.0-8.0	50	1,653	25.8	9.8	7.5	805	22.7	200/A/A BMW 3-Series ('25-'27)
	1031901	225/60R17	SL	99Y	BSW	6.0-8.0	51	1,709	27.6	9.3	6.5	754	21.6	280/A/A Audi A6/A7 ('25-'29)
18	1035215	225/40ZR18	XL	92Y	BSW	7.5-9.0	50	1,389	25.0	9.1	9.5	830	22.1	340/AA/A
	1031266	225/45R18	XL	95Y	BSW	7.0-8.5	50	1,521	25.7	9.1	7.5	807	20.4	200/A/A BMW 3-Series ('25-'27)
	1031046	225/45R18	XL	95Y	BSW	7.0-8.5	50	1,521	25.7	9.4	8.0	807	22.2	180/A/A BMW 2 Series GT ('25-'29)
	1035153	245/40ZR18	XL	97Y	BSW	8.0-9.5	50	1,609	25.6	9.8	9.5	813	22.9	340/AA/A
	1035166	245/50ZR18	XL	104Y	BSW	7.0-8.5	50	1,984	27.5	10.6	9.5	756	27.4	340/AA/A
	1031267	255/40R18	XL	99Y	BSW	8.5-10.0	50	1,709	25.8	10.2	7.5	806	22.7	200/A/A BMW 3-Series ('25-'27)
	1035157	255/45ZR18	XL	103Y	BSW	8.0-9.5	50	1,929	26.9	10.0	9.5	772	27.0	340/AA/A
	1035163	275/35ZR18	XL	(99Y)	BSW	9.0-11.0	50	1,709	25.4	10.9	9.5	818	25.5	340/AA/A
19	1035147	225/40ZR19	XL	(93Y)	BSW	7.5-9.0	50	1,433	25.9	9.1	9.5	801	22.5	340/AA/A
	1035146	235/40ZR19	XL	(96Y)	BSW	8.0-9.5	50	1,565	26.3	9.3	9.5	791	22.0	340/AA/A
	1035139	245/35ZR19	XL	(93Y)	BSW	8.0-9.5	50	1,433	25.6	9.8	9.5	810	23.3	340/AA/A
	1031895	245/40R19	XL	98Y	BSW	8.0-9.5	50	1,653	26.6	10.6	8.0	782	27.4	240/A/A Audi A4 / A5 ('24-'29) HRS
	1031903	245/45R19	XL	102Y	BSW	7.5-9.0	50	1,874	27.7	10.1	8.0	750	24.1	300/A/A Audi A6/A7 ('25-'29)
	1035705	245/45R19	XL	102Y	BSW	7.5-9.0	50	1,874	27.7	10.1	8.0	750	24.7	300/A/A Audi A6/A7 ('25-'29)
	1035138	255/35ZR19	XL	(96Y)	BSW	8.5-10.0	50	1,565	25.9	10.2	9.5	803	23.6	340/AA/A
	1035145	255/40ZR19	XL	(100Y)	BSW	8.5-10.0	50	1,764	26.9	10.2	9.5	772	24.9	340/AA/A
	1035144	265/40ZR19	XL	102Y	BSW	9.0-10.5	50	1,874	27.2	10.6	9.5	763	26.0	340/AA/A
	1035137	275/35ZR19	XL	(100Y)	BSW	9.0-11.0	50	1,764	26.4	10.9	9.5	786	26.6	340/AA/A
	1035143	275/40ZR19	XL	(105Y)	BSW	9.0-11.0	50	2,039	27.5	10.9	9.5	755	28.6	340/AA/A
	1035134	285/30ZR19	XL	(98Y)	BSW	9.5-10.5	50	1,653	25.6	11.4	9.5	812	26.2	340/AA/A
	1035160	285/35ZR19	XL	(103Y)	BSW	9.5-11.0	50	1,929	26.7	11.3	9.5	777	27.8	340/AA/A
20	1035213	235/35ZR20	XL	92(Y)	BSW	8.0-9.5	50	1,389	26.4	9.5	9.5	787	23.6	340/AA/A
	1035133	245/40ZR20	XL	(99Y)	BSW	8.0-9.5	50	1,709	27.6	9.8	9.5	754	25.1	340/AA/A
	1035222	275/30ZR20	XL	(97Y)	BSW	9.0-10.0	50	1,609	26.4	10.9	9.5	787	26.6	340/AA/A
	1035212	275/35ZR20	XL	(102Y)	BSW	9.0-11.0	50	1,874	27.4	10.9	9.5	758	28.1	340/AA/A
	1032613	HL245/35R20	XL	98Y	BSW	8.0-9.5	50	1,653	26.7	10.6	8.5	779	28.2	200/A/A Audi A4/A5 ('25-'29)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Ventus evo SUV | K137A

Ultra-High Performance Summer

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Rev/Mile	Weight	UTQG	Original Equipment
						psi	lbs							
18	1031954	235/50R18	XL	101H	BSW	6.5-8.5	50	1,819	27.2	10.5	8.0	762	23.5	220/A/A Volkswagen T7 ('24-'28)
19	1031908	235/55R19	XL	105W	BSW	6.5-8.5	50	2,039	29.2	10.3	7.5	712	35.3	180/A/A Audi Q5 ('25-'29)
20	1035184	245/45ZR20	XL	103Y	BSW	7.5-9.0	50	1,929	28.5	9.6	9.5	729	28.1	340/AA/A
	1031055	255/45R20	XL	105Y	BSW	8.0-9.5	50	2,039	28.9	10.4	7.5	720	29.1	140/A/A BMW X3 ('25-'29)
	1031909	255/45R20	XL	105W	BSW	8.0-9.5	50	2,039	28.9	10.6	8.0	719	34.9	180/A/A Audi Q5 ('25-'29)
	1035181	275/40ZR20	XL	106Y	BSW	9.0-11.0	50	2,094	28.5	10.9	9.5	729	30.1	340/AA/A
	1031619	275/45R20	XL	110Y	BSW	8.5-10.5	50	2,337	29.8	11.1	7.5	698	32.4	200/A/A BMW X5 PHEV ('23-'26)
	1031621	305/40R20	XL	112Y	BSW	10.0-12.0	50	2,469	29.5	12.6	7.5	704	36.5	200/A/A BMW X5 PHEV ('23-'26)
21	1031623	275/40R21	XL	107Y	BSW	9.0-11.0	50	2,149	29.4	11.4	7.0	707	32.6	180/A/A BMW X5 PHEV ('23-'26)
	1031625	315/35R21	XL	111Y	BSW	10.5-12.5	50	2,403	29.4	12.9	7.5	706	36.5	200/A/A BMW X5 PHEV ('23-'26)

About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters
 Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.
 Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	
						psi	lbs							
16	1015379	205/55ZR16	XL	94W	BSW	5.5-7.5	50	1,477	24.7	8.7	10.0	842	19.1	320/AA/A
17	1015410	205/45ZR17	XL	88W	BSW	6.5-7.5	50	1,235	24.0	8.4	10.0	865	18.2	320/AA/A
	1015234	205/50ZR17	XL	93Y	BSW	5.5-7.5	50	1,433	24.9	8.8	10.0	834	19.3	320/AA/A
	1015401	215/45ZR17	XL	91Y	BSW	7.0-8.0	50	1,356	24.4	8.7	10.0	851	19.4	320/AA/A
	1015690	215/50ZR17	XL	95W	BSW	6.0-7.5	50	1,521	25.3	9.4	10.0	821	21.8	320/AA/A
	1015402	225/45ZR17	XL	94Y	BSW	7.0-8.5	50	1,477	24.7	9.2	10.0	840	20.3	320/AA/A
	1015689	225/50ZR17	XL	98Y	BSW	6.0-8.0	50	1,653	25.7	9.7	10.0	809	23.1	320/AA/A
	1015237	235/45ZR17	XL	97Y	BSW	7.5-9.0	50	1,609	25.1	9.6	10.0	827	22.9	320/AA/A
	1015239	245/40ZR17	XL	95Y	BSW	8.0-9.5	50	1,521	24.5	10.1	10.0	848	22.0	320/AA/A
	1015240	245/45ZR17	XL	99Y	BSW	7.5-9.0	50	1,709	25.5	9.9	10.0	814	24.0	320/AA/A
	1015413	255/40ZR17	XL	98Y	BSW	8.5-10.0	50	1,653	24.8	10.6	10.0	837	23.2	320/AA/A
18	1015242	215/40ZR18	XL	89Y	BSW	7.0-8.5	50	1,279	24.6	8.9	10.0	846	18.8	320/AA/A
	1015243	215/45ZR18	XL	93Y	BSW	7.0-8.0	50	1,433	25.4	8.7	10.0	817	19.9	320/AA/A
	1015414	225/40ZR18	XL	92Y	BSW	7.5-9.0	50	1,389	24.9	9.4	10.0	833	21.9	320/AA/A
	1015415	225/45ZR18	XL	95Y	BSW	7.0-8.5	50	1,521	25.7	9.2	10.0	807	22.3	320/AA/A
	1015416	235/40ZR18	XL	95Y	BSW	8.0-9.5	50	1,521	25.2	9.8	10.0	825	22.6	320/AA/A
	1015247	235/50ZR18	XL	101Y	BSW	6.5-8.5	50	1,819	27.1	10.0	10.0	767	25.9	320/AA/A
	1015248	245/35ZR18	XL	92Y	BSW	8.0-9.5	50	1,389	24.6	10.0	10.0	846	21.8	320/AA/A
	1015418	245/40ZR18	XL	97Y	BSW	8.0-9.5	50	1,609	25.5	10.1	10.0	815	23.0	320/AA/A
	1015250	245/45ZR18	XL	100Y	BSW	7.5-9.0	50	1,764	26.4	9.9	10.0	786	25.2	320/AA/A
	1015251	255/35ZR18	XL	94Y	BSW	8.5-10.0	50	1,477	24.8	10.6	10.0	838	21.5	320/AA/A
	1015252	255/40ZR18	XL	99Y	BSW	8.5-10.0	50	1,709	25.8	10.6	10.0	805	24.2	320/AA/A
	1015253	255/45ZR18	XL	103Y	BSW	8.0-9.5	50	1,929	26.8	10.4	10.0	774	26.0	320/AA/A
	1015417	265/35ZR18	XL	97Y	BSW	9.0-10.5	50	1,609	25.1	11.0	10.0	827	24.3	320/AA/A
	1015255	265/40ZR18	XL	101Y	BSW	9.0-10.5	50	1,819	26.1	11.0	10.0	795	26.1	320/AA/A
	1015256	275/35ZR18	XL	99Y	BSW	9.0-11.0	50	1,709	25.3	11.2	10.0	820	25.4	320/AA/A
	1015257	275/40ZR18	XL	103Y	BSW	9.0-11.0	50	1,929	26.4	11.3	10.0	786	26.9	320/AA/A
	1015258	285/35ZR18	XL	101Y	BSW	9.5-11.0	50	1,819	25.6	11.7	10.0	810	26.1	320/AA/A
19	1015281	225/35ZR19	XL	88Y	BSW	7.5-9.0	50	1,235	25.0	9.4	10.0	831	21.8	320/AA/A
	1015282	225/40ZR19	XL	93Y	BSW	7.5-9.0	50	1,433	25.9	9.4	10.0	803	22.2	320/AA/A
	1015283	225/45ZR19	XL	96Y	BSW	7.0-8.5	50	1,565	26.7	9.2	10.0	777	23.3	320/AA/A
	1015419	235/35ZR19	XL	91Y	BSW	8.0-9.5	50	1,356	25.2	9.8	10.0	823	22.1	320/AA/A
	1015285	245/35ZR19	XL	93Y	BSW	8.0-9.5	50	1,433	25.6	10.0	10.0	813	22.7	320/AA/A
	1015286	245/40ZR19	XL	98Y	BSW	8.0-9.5	50	1,653	26.5	10.1	10.0	784	24.3	320/AA/A
	1015287	245/45ZR19	XL	102Y	BSW	7.5-9.0	50	1,874	27.4	9.9	10.0	757	26.2	320/AA/A
	1015288	255/30ZR19	XL	91Y	BSW	8.5-9.5	50	1,356	24.8	10.9	10.0	836	22.6	320/AA/A
	1015420	255/35ZR19	XL	96Y	BSW	8.5-10.0	50	1,565	25.8	10.5	10.0	805	24.9	320/AA/A
	1015290	255/40ZR19	XL	100Y	BSW	8.5-10.0	50	1,764	26.8	10.6	10.0	775	25.4	320/AA/A
	1015291	255/45ZR19	XL	104Y	BSW	8.0-9.5	50	1,984	27.8	10.4	10.0	746	27.3	320/AA/A
	1015292	265/30ZR19	XL	93Y	BSW	9.0-10.0	50	1,433	25.1	10.9	10.0	828	23.5	320/AA/A
	1015293	265/35ZR19	XL	98Y	BSW	9.0-10.5	50	1,653	26.1	11.0	10.0	796	25.4	320/AA/A
	1015294	275/30ZR19	XL	96Y	BSW	9.0-10.0	50	1,565	25.3	11.5	10.0	820	25.1	320/AA/A
	1015295	275/35ZR19	XL	100Y	BSW	9.0-11.0	50	1,764	26.3	11.2	10.0	789	26.5	320/AA/A
	1015296	275/40ZR19	XL	105Y	BSW	9.0-11.0	50	2,039	27.4	11.3	10.0	757	28.1	320/AA/A
	1015297	285/30ZR19	XL	98Y	BSW	9.5-10.5	50	1,653	25.6	12.0	10.0	813	26.1	320/AA/A
	1015298	285/35ZR19	XL	103Y	BSW	9.5-11.0	50	1,929	26.7	11.7	10.0	779	27.2	320/AA/A
	1015299	295/30ZR19	XL	100Y	BSW	10.0-11.0	50	1,764	25.8	12.3	10.0	805	27.2	320/AA/A
	1015300	305/30ZR19	XL	102Y	BSW	10.5-11.5	50	1,874	26.0	12.6	10.0	798	28.4	320/AA/A
	1015301	325/30ZR19	XL	105Y	BSW	11.0-12.0	50	2,039	26.5	13.7	10.0	784	30.7	320/AA/A
20	1015364	245/30ZR20	XL	90Y	BSW	8.0-9.0	50	1,323	25.7	10.2	10.0	807	23.9	320/AA/A
	1015365	245/35ZR20	XL	95Y	BSW	8.0-9.5	50	1,521	26.6	10.0	10.0	782	24.0	320/AA/A
	1015366	245/40ZR20	XL	99Y	BSW	8.0-9.5	50	1,709	27.5	10.1	10.0	755	25.3	320/AA/A
	1015367	245/45ZR20	XL	103Y	BSW	7.5-9.0	50	1,929	28.4	9.9	10.0	730	27.1	320/AA/A
	1015368	255/30ZR20	XL	92Y	BSW	8.5-9.5	50	1,389	25.8	10.9	10.0	804	24.2	320/AA/A
	1015369	255/35ZR20	XL	97Y	BSW	8.5-10.0	50	1,609	26.8	10.5	10.0	775	25.3	320/AA/A
	1015370	255/45ZR20	XL	105Y	BSW	8.0-9.5	50	2,039	28.8	10.4	10.0	720	28.4	320/AA/A
	1015371	275/30ZR20	XL	97Y	BSW	9.0-10.0	50	1,609	26.3	11.5	10.0	789	25.9	320/AA/A
	1015372	275/35ZR20	XL	102Y	BSW	9.0-11.0	50	1,874	27.3	11.2	10.0	760	27.6	320/AA/A
	1017382	275/40ZR20	XL	106Y	BSW	9.0-11.0	50	2,094	28.4	11.3	10.0	730	29.3	320/AA/A
	1015373	285/30ZR20	XL	99Y	BSW	9.5-10.5	50	1,709	26.6	12.0	10.0	782	27.3	320/AA/A
	1015374	305/25ZR20	XL	97Y	BSW	10.5-11.5	50	1,609	25.8	12.9	10.0	804	28.8	320/AA/A
21	1015375	245/35ZR21	XL	96Y	BSW	8.0-9.5	50	1,565	27.5	10.0	10.0	754	25.0	320/AA/A
	1015758	275/30ZR21	XL	98Y	BSW	9.0-10.0	50	1,653	27.3	11.5	10.0	760	26.6	320/AA/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	
						psi	lbs							
15	1014361	195/50R15	SL	82H	BSW	5.5-7.0	51	1,047	22.6	8.5	9.5	920	15.9	500/AA/A
	1014359	195/55R15	SL	85V	BSW	5.5-7.0	51	1,135	23.3	8.4	9.5	892	16.6	500/AA/A
	1014376	205/50R15	SL	86H	BSW	5.5-7.5	51	1,168	22.9	8.9	9.5	905	18.7	500/AA/A
16	1014375	185/55R16	SL	83H	BSW	5.0-6.5	51	1,074	23.9	7.8	9.5	870	16.6	500/AA/A
	1014367	205/45R16	SL	83V	BSW	6.5-7.5	51	1,074	23.2	8.4	9.5	897	17.9	500/AA/A
	1014360	205/50R16	SL	87V	BSW	5.5-7.5	51	1,201	23.9	8.9	9.5	867	19.5	500/AA/A
	1014358	205/55R16	XL	94V	BSW	5.5-7.5	50	1,477	24.7	8.7	9.5	840	20.5	500/AA/A
	1014373	215/55R16	XL	97V	BSW	6.0-7.5	50	1,609	25.1	9.1	9.5	827	22.3	500/AA/A
	1014369	225/50R16	SL	92V	BSW	6.0-8.0	51	1,389	24.8	9.7	9.5	837	21.8	500/AA/A
	1014368	225/55R16	XL	99V	BSW	6.0-8.0	50	1,709	25.6	9.6	9.5	811	23.6	500/AA/A
	1014372	245/50R16	SL	97H	BSW	7.0-8.5	51	1,609	25.6	10.4	9.5	811	23.9	500/AA/A
	1014378	205/40R17	XL	84V	BSW	7.0-8.0	50	1,102	23.3	8.7	9.5	891	18.0	500/AA/A
17	1014371	205/45R17	XL	88V	BSW	6.5-7.5	50	1,235	24.1	8.4	9.5	862	18.6	500/AA/A
	1014370	205/50R17	XL	93V	BSW	5.5-7.5	50	1,433	25.0	8.8	9.5	832	19.4	500/AA/A
	1014363	215/45R17	XL	91V	BSW	7.0-8.0	50	1,356	24.5	8.7	9.5	848	20.2	500/AA/A
	1014362	215/50R17	SL	91V	BSW	6.0-7.5	51	1,356	25.4	9.4	9.5	819	22.0	500/AA/A
	1027427	215/55R17	SL	94W	BSW	6.0-7.5	51	1,477	26.1	9.1	9.5	772	21.4	500/AA/A
	1014365	225/45R17	XL	94V	BSW	7.0-8.5	50	1,477	24.8	9.2	9.5	837	21.2	500/AA/A
	1014364	225/50R17	XL	98V	BSW	6.0-8.0	50	1,653	25.8	9.7	9.5	806	23.5	500/AA/A
	1027428	225/55R17	XL	101W	BSW	6.0-8.0	50	1,819	26.6	9.3	9.5	757	25.0	500/AA/A
	1014366	235/45R17	XL	97V	BSW	7.5-9.0	50	1,609	25.2	9.6	9.5	824	22.8	500/AA/A
	1027429	235/50R17	SL	96W	BSW	6.5-8.5	51	1,565	26.1	10.1	9.5	772	23.9	500/AA/A
	1027430	245/40R17	XL	95W	BSW	8.0-9.5	50	1,521	24.6	10.1	9.5	822	22.2	500/AA/A
	1014379	245/45R17	SL	95V	BSW	7.5-9.0	51	1,521	25.5	9.9	9.5	814	24.2	500/AA/A
18	1014377	215/45R18	XL	93V	BSW	7.0-8.0	50	1,433	25.5	8.7	9.5	815	19.8	500/AA/A
	1015032	225/40R18	XL	92W	BSW	7.5-9.0	50	1,389	24.9	9.4	9.5	833	21.1	500/AA/A
	1027431	225/45R18	XL	95W	BSW	7.0-8.5	50	1,521	25.8	9.2	9.5	783	22.4	500/AA/A
	1027432	225/50R18	SL	95W	BSW	6.0-8.0	51	1,521	26.7	9.6	9.5	755	23.9	500/AA/A
	1027433	235/40R18	XL	95W	BSW	8.0-9.5	50	1,521	25.2	9.8	9.5	800	21.7	500/AA/A
	1027434	235/45R18	XL	98W	BSW	7.5-9.0	50	1,653	26.2	9.6	9.5	770	24.1	500/AA/A
	1027435	235/50R18	XL	101W	BSW	6.5-8.5	50	1,819	27.2	10.1	9.5	743	25.7	500/AA/A
	1027436	245/40R18	XL	97W	BSW	8.0-9.5	50	1,609	25.5	10.1	9.5	790	23.1	500/AA/A
	1027437	245/45R18	XL	100W	BSW	7.5-9.0	50	1,764	26.5	9.9	9.5	761	25.3	500/AA/A
	1027438	245/55R18	SL	103W	BSW	7.0-8.5	51	1,929	28.5	10.2	9.5	708	27.9	500/AA/A
	1027439	255/35R18	XL	94W	BSW	8.5-10.0	50	1,477	24.8	10.6	9.5	813	21.1	500/AA/A
	1027440	255/40R18	XL	99W	BSW	8.5-10.0	50	1,709	25.9	10.6	9.5	779	24.7	500/AA/A
19	1027441	225/45R19	XL	96W	BSW	7.0-8.5	50	1,565	26.8	9.2	9.5	753	23.4	500/AA/A
	1027442	245/40R19	XL	98W	BSW	8.0-9.5	50	1,653	26.6	10.1	9.5	759	24.9	500/AA/A
	1027443	245/45R19	XL	102W	BSW	7.5-9.0	50	1,874	27.5	9.9	9.5	733	26.6	500/AA/A
	1027444	255/35R19	XL	96W	BSW	8.5-10.0	50	1,565	25.9	10.6	9.5	780	23.4	500/AA/A
	1027445	255/40R19	XL	100W	BSW	8.5-10.0	50	1,764	26.9	10.6	9.5	750	26.1	500/AA/A
20	1027446	245/40R20	XL	99W	BSW	8.0-9.5	50	1,709	27.6	10.1	9.5	731	26.3	500/AA/A
	1027447	245/45R20	XL	103W	BSW	7.5-9.0	50	1,929	28.5	9.9	9.5	707	27.7	500/AA/A
	1027448	255/45R20	XL	105W	BSW	8.0-9.5	50	2,039	28.9	10.4	10.0	698	28.7	500/AA/A
	1027449	275/40R20	XL	106W	BSW	9.0-11.0	50	2,094	28.5	11.3	9.5	707	30.9	500/AA/A

Technical data subject to change without prior notice.
 XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Original Equipment	Tech	
						psi	lbs									
16	1028504	205/55ZR16	SL	91W	BSW	5.5-7.5	51	1,356	24.7	8.7	10.0	841	19.2	560/AA/A		
17	1028505	205/50ZR17	XL	93W	BSW	5.5-7.5	50	1,433	24.9	8.9	10.0	833	19.7	560/AA/A		
	1028506	215/45ZR17	XL	91W	BSW	7.0-8.0	50	1,356	24.5	8.7	10.0	848	19.0	560/AA/A		
	1028507	215/50ZR17	XL	95W	BSW	6.0-7.5	50	1,521	25.3	9.2	10.0	820	21.5	560/AA/A		
	1026066	215/55ZR17	SL	94W	BSW	6.0-7.5	51	1,477	26.1	9.1	10.0	795	22.1	560/AA/A		
	1028508	225/45ZR17	XL	94Y	BSW	7.0-8.5	50	1,477	24.8	9.2	10.0	839	20.6	560/AA/A		
	1028509	225/50ZR17	XL	98W	BSW	6.0-8.0	50	1,653	25.7	9.6	10.0	808	22.7	560/AA/A		
	1028510	225/55ZR17	SL	97W	BSW	6.0-8.0	51	1,609	26.5	9.3	10.0	783	23.6	560/AA/A		
	1028656	235/45ZR17	XL	97W	BSW	7.5-9.0	50	1,609	25.2	9.6	10.0	826	22.8	560/AA/A		
	1028512	235/50ZR17	SL	96W	BSW	6.5-8.5	51	1,565	26.1	10.1	10.0	797	23.6	560/AA/A		
	1028513	235/55ZR17	SL	99W	BSW	6.5-8.5	51	1,709	26.9	9.9	10.0	771	24.8	560/AA/A		
	1028514	245/40ZR17	SL	91W	BSW	8.0-9.5	51	1,356	24.6	10.1	10.0	845	21.1	560/AA/A		
	1028515	245/45ZR17	XL	99Y	BSW	7.5-9.0	50	1,709	25.5	9.9	10.0	815	23.7	560/AA/A		
18	1028516	215/40ZR18	XL	89Y	BSW	7.0-8.5	50	1,279	24.6	8.9	10.0	844	19.5	560/AA/A		
	1028517	215/45ZR18	XL	93Y	BSW	7.0-8.0	50	1,433	25.5	8.7	10.0	815	20.6	560/AA/A		
	1028518	225/40ZR18	XL	92Y	BSW	7.5-9.0	50	1,389	24.9	9.4	10.0	833	22.3	560/AA/A		
	1028810	225/45ZR18H	XL	95H	BSW	7.0-8.5	50	1,521	25.7	9.4	10.0	808	23.0	620/A/A	BMW 2-Series ('24-'30)	
	1028519	225/45ZR18	XL	95Y	BSW	7.0-8.5	50	1,521	25.7	9.2	10.0	807	22.3	560/AA/A		
	1028520	225/50ZR18	SL	95W	BSW	6.0-8.0	51	1,521	26.7	9.6	10.0	778	23.3	560/AA/A		
	1026893	225/55ZR18	XL	102H	BSW	6.0-8.0	50	1,874	27.8	10.0	9.5	747	26.5	620/A/A	BMW X1 ('22-'26)	
	1028880	235/40R18	SL	91W	BSW	8.0-9.5	51	1,356	25.1	9.9	9.0	826	24.4	560/A/A	Hyundai Elantra N line ('20-'26)	SOA
	1028522	235/40ZR18	XL	95Y	BSW	8.0-9.5	50	1,521	25.2	9.8	10.0	823	22.7	560/AA/A		
	1030060	235/45R18	XL	98V	BSW	7.5-9.0	50	1,653	26.4	10.0	8.5	788	24.5	560/A/A	Tesla Model 3 ('21-'27)	EV, SOA
	1028523	235/45ZR18	XL	98W	BSW	7.5-9.0	50	1,653	26.1	9.6	10.0	794	24.0	560/AA/A		
	1028524	235/50ZR18	SL	97W	BSW	6.5-8.5	51	1,609	27.0	10.0	10.0	768	24.8	560/AA/A		
	1028526	245/35ZR18	XL	92Y	BSW	8.0-9.5	50	1,389	24.6	10.1	10.0	844	21.9	560/AA/A		
	1028527	245/40ZR18	XL	97Y	BSW	8.0-9.5	50	1,609	25.6	9.9	10.0	812	24.1	560/AA/A		
	1026065	245/45ZR18	XL	100Y	BSW	7.5-9.0	50	1,764	26.5	9.9	10.0	783	26.0	560/AA/A		
	1028528	245/50ZR18	SL	100W	BSW	7.0-8.5	51	1,764	27.4	10.5	10.0	757	26.4	560/AA/A		
	1028529	245/55ZR18	SL	103W	BSW	7.0-8.5	51	1,929	28.3	10.4	10.0	733	29.2	560/AA/A		
	1028530	255/35ZR18	XL	94Y	BSW	8.5-10.0	50	1,477	24.8	10.6	10.0	836	22.9	560/AA/A		
	1028531	255/40ZR18	XL	99Y	BSW	8.5-10.0	50	1,709	25.8	10.6	10.0	804	25.0	560/AA/A		
	1028532	255/45ZR18	SL	99W	BSW	8.0-9.5	51	1,709	26.9	10.4	10.0	774	25.7	560/AA/A		
	1028533	265/35ZR18	XL	97Y	BSW	9.0-10.5	50	1,609	25.2	11.1	10.0	826	24.5	560/AA/A		
	1028534	265/40ZR18	XL	101Y	BSW	9.0-10.5	50	1,819	26.1	11.0	10.0	794	26.4	560/AA/A		
19	1028535	225/40ZR19	XL	93Y	BSW	7.5-9.0	50	1,433	25.9	9.4	10.0	801	21.8	560/AA/A		
	1028536	225/45ZR19	XL	96Y	BSW	7.0-8.5	50	1,565	26.8	9.2	10.0	776	23.1	560/AA/A		
	1028872	235/35ZR19	XL	91Y	BSW	8.0-9.5	50	1,356	25.4	9.9	10.0	819	23.2	560/AA/A		
	1028537	235/40ZR19	XL	96W	BSW	8.0-9.5	50	1,565	26.3	9.8	10.0	791	23.0	560/AA/A		
	1028538	235/50ZR19	XL	103W	BSW	6.5-8.5	50	1,929	28.1	10.1	10.0	740	28.1	560/AA/A		
	1028539	235/55ZR19	XL	105W	BSW	6.5-8.5	50	2,039	28.9	9.9	10.0	718	28.9	560/AA/A		
	1028540	245/35ZR19	XL	93Y	BSW	8.0-9.5	50	1,433	25.6	10.1	10.0	810	23.6	560/AA/A		
	1028541	245/40ZR19	XL	98Y	BSW	8.0-9.5	50	1,653	26.6	10.1	10.0	782	24.4	560/AA/A		

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Original Equipment	Tech
						psi	lbs								
19	1028542	245/45ZR19	XL	102Y	BSW	7.5-9.0	50	1,874	27.5	9.9	10.0	756	26.8	560/AA/A	
	1028543	245/50ZR19	XL	105W	BSW	7.0-8.5	50	2,039	28.5	10.5	10.0	730	29.3	560/AA/A	
	1028544	255/35ZR19	XL	96Y	BSW	8.5-10.0	50	1,565	25.9	10.6	10.0	803	24.7	560/AA/A	
	1028571	255/40ZR19	XL	100Y	BSW	8.5-10.0	50	1,764	26.9	10.6	10.0	774	25.9	560/AA/A	
	1028545	255/45ZR19	XL	104W	BSW	8.0-9.5	50	1,984	27.9	10.4	10.0	745	28.1	560/AA/A	
	1028546	265/35ZR19	XL	98Y	BSW	9.0-10.5	50	1,653	26.2	11.1	10.0	793	25.6	560/AA/A	
	1028547	265/50ZR19	XL	110W	BSW	7.5-9.5	50	2,337	29.3	11.4	10.0	710	32.3	560/AA/A	
	1028548	275/30ZR19	XL	96Y	BSW	9.0-10.0	50	1,565	25.4	11.5	10.0	817	27.1	560/AA/A	
	1028873	275/35ZR19	XL	100Y	BSW	9.0-11.0	50	1,764	26.4	11.4	10.0	786	26.7	560/AA/A	
	1028549	275/40ZR19	XL	105Y	BSW	9.0-11.0	50	2,039	27.5	11.3	10.0	756	30.0	560/AA/A	
	1028550	275/45ZR19	XL	108W	BSW	8.5-10.5	50	2,205	28.5	11.1	10.0	728	31.7	560/AA/A	
	1028551	285/30ZR19	XL	98Y	BSW	9.5-10.5	50	1,653	25.7	12.0	10.0	810	27.9	560/AA/A	
	1028874	285/35ZR19	XL	103Y	BSW	9.5-11.0	50	1,929	26.7	11.8	10.0	778	29.6	560/AA/A	
	1028552	285/40ZR19	SL	103Y	BSW	9.5-11.0	51	1,929	27.8	11.8	10.0	747	31.0	560/AA/A	
20	1028877	235/35ZR20	XL	92Y	BSW	8.0-9.5	50	1,389	26.5	9.5	10.0	785	23.4	560/AA/A	
	1028553	245/35ZR20	XL	95Y	BSW	8.0-9.5	50	1,521	26.6	10.1	10.0	780	24.2	560/AA/A	
	1027399	245/40ZR20	XL	99H	BSW	8.0-9.5	50	1,709	27.4	10.2	9.5	757	26.6	620/A/A	BMW 5-Series ('23-'25)
	1028554	245/40ZR20	XL	99Y	BSW	8.0-9.5	50	1,709	27.6	10.1	10.0	754	25.5	560/AA/A	
	1028555	245/45ZR20	XL	103Y	BSW	7.5-9.0	50	1,929	28.5	9.9	10.0	730	28.4	560/AA/A	
	1028556	255/35ZR20	XL	97Y	BSW	8.5-10.0	50	1,565	26.9	10.6	10.0	774	25.9	560/AA/A	
	1028567	255/40ZR20	XL	101Y	BSW	8.5-10.0	50	1,819	27.8	10.6	10.0	746	27.2	560/AA/A	
	1028557	255/45ZR20	XL	105W	BSW	8.0-9.5	50	2,039	28.9	10.4	10.0	720	30.0	560/AA/A	
	1028558	265/35ZR20	XL	99Y	BSW	9.0-10.5	50	1,709	27.2	11.1	10.0	765	26.8	560/AA/A	
	1028563	265/45ZR20	XL	108Y	BSW	8.5-10.0	50	2,205	29.1	10.8	10.0	713	31.5	560/AA/A	
	1028875	275/30ZR20	XL	97Y	BSW	9.0-10.0	50	1,609	26.4	11.5	10.0	787	28.5	560/AA/A	
	1027400	275/35ZR20	XL	102H	BSW	9.0-11.0	50	1,874	27.4	11.5	10.0	759	29.6	620/A/A	BMW 5-Series ('23-'25)
	1028876	275/35ZR20	XL	102Y	BSW	9.0-11.0	50	1,874	27.4	11.3	10.0	758	28.5	560/AA/A	
	1028559	275/40ZR20	XL	106Y	BSW	9.0-11.0	50	2,094	28.5	11.3	10.0	730	31.0	560/AA/A	
	1028564	275/45ZR20	XL	110Y	BSW	8.5-10.5	50	2,337	29.5	11.1	10.0	703	33.4	560/AA/A	
	1028560	285/30ZR20	XL	99Y	BSW	9.5-10.5	50	1,709	26.6	12.0	10.0	780	29.0	560/AA/A	
	1028561	285/35ZR20	SL	100Y	BSW	9.5-11.0	51	1,764	27.7	11.8	10.0	750	28.9	560/AA/A	
	1032976	305/35ZR20	XL	107Y	BSW	10.0-12.0	50	2,149	28.3	12.2	10.0	734	32.3	560/AA/A	
	1028562	315/35ZR20	XL	110Y	BSW	10.5-12.5	50	2,337	28.5	12.9	10.0	730	35.2	560/AA/A	
21	1028878	245/35ZR21	XL	96Y	BSW	8.0-9.5	50	1,565	27.6	10.1	10.0	753	25.3	560/AA/A	
	1028568	255/35ZR21	XL	98Y	BSW	8.5-10.0	50	1,653	27.8	10.6	10.0	746	27.0	560/AA/A	
	1028879	265/35ZR21	XL	101Y	BSW	9.0-10.5	50	1,819	28.2	11.1	10.0	738	28.5	560/AA/A	
	1028569	275/35ZR21	XL	103Y	BSW	9.0-11.0	50	1,929	28.4	11.4	10.0	732	30.3	560/AA/A	
22	1028565	265/35ZR22	XL	102Y	BSW	9.0-10.5	50	1,874	29.2	11.1	10.0	712	30.4	560/AA/A	
	1028566	285/35ZR22	XL	106Y	BSW	9.5-11.0	50	2,094	29.7	11.8	10.0	700	33.5	560/AA/A	

About Hankook
ION
VentusKinergy
WeatherflexDynapro
Winter

Vantra

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Rev/Mile	Weight	UTQG	
						psi	lbs							
18	1030265	235/60R18	XL	107W	BSW	6.5-8.5	50	2,149	29.1	9.8	9.5	713	28.9	540/AA/A
19	1030266	235/55R19	XL	105W	BSW	6.5-8.5	50	2,039	29.0	10.2	9.5	716	27.4	540/AA/A
	1033664	255/50ZR19	XL	107Y	BSW	7.0-9.0	50	2,149	28.9	10.8	9.0	719	32.2	540/AA/A
	1030268	265/55R19	SL	109W	BSW	7.5-9.5	51	2,271	30.2	11.2	9.5	689	31.4	540/AA/A
20	1032945	255/45ZR20	XL	105Y	BSW	8.0-9.5	50	2,039	28.9	10.0	9.0	718	30.5	540/AA/A
	1033666	255/50ZR20	XL	109Y	BSW	7.0-9.0	50	2,271	29.9	10.8	9.0	695	33.6	540/AA/A
	1033667	265/45ZR20	XL	108Y	BSW	8.5-10.0	50	2,205	29.2	10.8	9.0	712	31.8	540/AA/A
	1030269	265/50R20	XL	111W	BSW	7.5-9.5	50	2,403	30.2	11.1	9.5	687	36.1	540/AA/A
	1032947	275/45ZR20	XL	110Y	BSW	8.5-10.5	50	2,337	29.6	11.1	9.0	701	33.6	540/AA/A
	1032946	305/40ZR20	XL	112Y	BSW	10.0-12.0	50	2,469	29.4	12.2	9.0	707	35.6	540/AA/A
21	1030267	255/40R21	XL	102W	BSW	8.5-9.5	50	1,874	28.8	10.9	9.5	722	30.9	540/AA/A
	1033797	265/40ZR21	XL	(105Y)	BSW	9.0-10.5	50	2,039	29.2	11.2	9.0	712	33.8	540/AA/A
	1032948	275/40ZR21	XL	107Y	BSW	9.0-11.0	50	2,149	29.5	11.3	9.0	704	34.4	540/AA/A
	1030453	275/45ZR21	XL	(110Y)	BSW	8.5-10.5	50	2,337	30.6	11.1	9.0	678	35.0	540/AA/A
	1030454	285/40ZR21	XL	(109Y)	BSW	9.5-11.0	50	2,271	29.8	11.3	9.0	697	34.3	540/AA/A
	1033670	295/35ZR21	XL	(107Y)	BSW	10.0-11.5	50	2,149	28.9	12.2	9.0	718	33.5	540/AA/A
	1030455	315/35ZR21	XL	(111Y)	BSW	10.5-12.5	50	2,403	29.4	12.5	9.0	706	37.2	540/AA/A
22	1030270	265/40R22	XL	106W	BSW	9.0-10.5	50	2,094	30.2	11.3	9.5	688	35.7	540/AA/A
	1033796	275/40ZR22	XL	107Y	BSW	9.0-11.0	50	2,149	30.5	11.3	9.0	681	35.9	540/AA/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Ventus ST | RH06

Ultra high performance all-season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	
						psi	lbs							
17	1004322	255/50R17	SL	101W	BSW	7.0-9.0	51	1,819	27.0	10.6	10.5	770	30.3	420/A/A
	1003968	275/60R17	SL	110V	BSW	7.5-9.5	44	2,337	30.0	11.4	10.0	693	36.7	420/A/A
18	1004324	295/45R18	SL	108V	BSW	9.5-11.0	51	2,205	28.4	11.9	10.5	732	34.3	420/A/A
20	1004328	275/40R20	XL	106W	BSW	9.0-11.0	50	2,094	28.6	11.1	10.0	727	33.1	420/A/A
	1004296	275/45R20	XL	109V	BSW	8.5-10.5	50	2,271	29.7	10.9	10.0	700	34.7	420/A/A
	1004295	275/55R20	XL	117V	BSW	7.5-9.5	50	2,833	31.8	11.4	10.0	653	39.9	420/A/A
	1004231	295/45R20	XL	114V	BSW	9.5-11.0	50	2,601	30.3	12.0	10.0	685	38.0	420/A/A
22	1004914	265/35R22	XL	102W	BSW	9.0-10.5	50	1,874	29.2	10.9	10.5	711	32.0	420/A/A
	1007457	265/40R22	XL	106V	BSW	9.0-10.5	50	2,094	30.2	10.9	10.5	687	34.1	420/A/A
	1008409	275/45R22	XL	112V	BSW	8.5-10.5	50	2,469	31.7	10.9	10.0	656	37.4	420/A/A
	1007301	285/45R22	XL	114V	BSW	9.0-10.5	50	2,601	32.0	11.4	10.5	650	40.7	420/A/A
	1005412	305/40R22	XL	114V	BSW	10.0-12.0	50	2,601	31.5	12.5	10.0	659	39.7	420/A/A
	1004712	305/45R22	XL	118V	BSW	9.5-11.5	50	2,910	32.7	12.1	10.0	635	42.5	420/A/A

Ventus AS | RH07

Ultra high performance all-season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	
						psi	lbs							
17	1007771	275/55R17	SL	109V	BSW	7.5-9.5	44	2,271	28.8	11.4	10.5	721	35.1	420/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

About Hankook

ION

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra





KINERGY

CAR / SUV

Kinergy XP | H446

Kinergy GT | H436 & H436B

Kinergy PT | H737

Kinergy ST | H735

Kinergy 4S2 | H750

Kinergy 4S2 X | H750A

About Hankook

Product Overview

iON

Ventus

Kinergy

Dynapro

Winter

Vantra

Smart

Product Line-up

The Kinergy Family

← All-Weather →

KINERGY 4S²

KINERGY XP



← Grand Touring →

All-Season

KINERGY GT

KINERGY PT

KINERGY ST



Touring

KINERGY XP (H446)

Premium All-Season Control and Comfort





Warranty



Outstanding All-Season Control

A Beveled Edges on Shoulder Grooves

The beveled edges generate grip with improved traction on snowy roads.

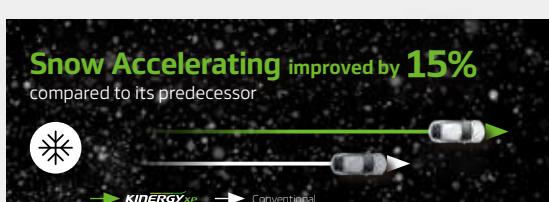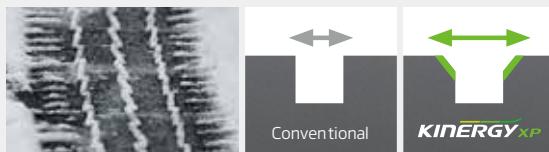

Reliable Longevity

Treadlife




* Based on internal mileage test

Enhanced Quietness

B Optimized Multi-Pitch Sequencing

Tire noise can be drastically reduced by optimizing the pitch sequence. Kinergy XP has optimized the number and size of pitches to listen more to what matters.

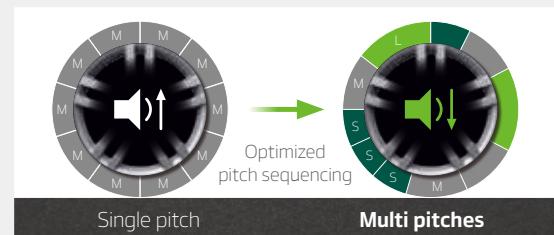

KINERGY GT (H436)
Grand touring all-season tire for all roads




Warranty




Wide circumferential 4 channel grooves

Wider grooves provide maximum water evacuation which promotes wet traction.

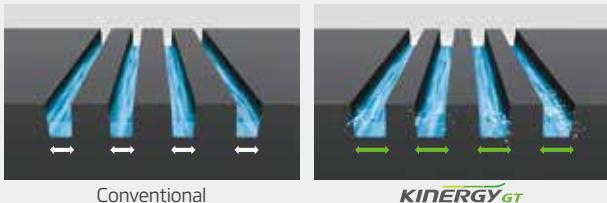


Optimal profile design

A wide tread profile provides stability and uniformity which reduces distortion, delivering outstanding handling performance and improved tread life.

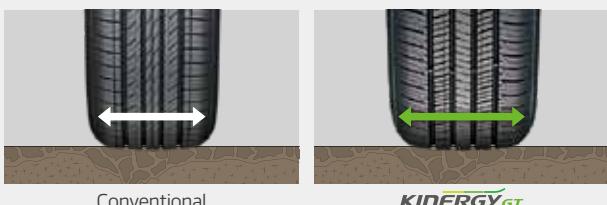

Optimized block stiffness

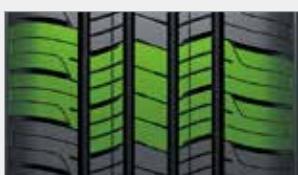

Optimized tread block stiffness ensures enhanced durability and tread uniformity for improved handling performance and mileage.

Center rib



A rigid center rib provides excellent grip for outstanding handling and braking performance.


Equalised chamfer sipe

Chamfer sipes maximise snow performance providing consistent grip in snowy conditions.



Optimized lateral groove design

Wide lateral grooves provide excellent snow grip and enhance snow traction.

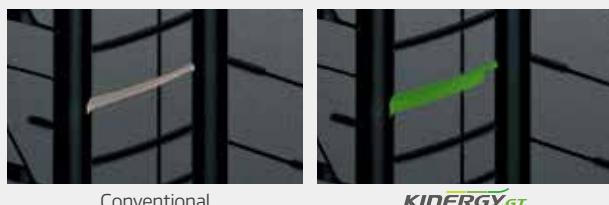

Step-wing shoulder



Step-wing shoulder design maximises water expulsion for outstanding safety.

Wide lateral groove



Wide lateral grooves incorporated into the tire's tread ensure hydroplaning resistance for excellent wet handling and braking.

KINERGY PT (H737)

Premium touring all-season



Warranty

LIMITED TREADWEAR WARRANTY


Up to
90,000 MI

Optimized block stiffness




Optimized tread block stiffness ensures enhanced durability and tread uniformity for improved handling performance and mileage.

High stiffness center rib

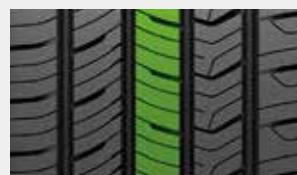


A rigid center rib provides excellent grip for outstanding dry handling and braking performance.

Wide lateral groove

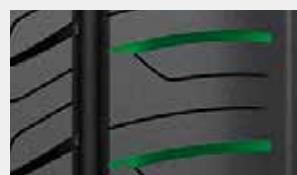

Wide lateral grooves incorporated into the tire's tread ensure hydroplaning resistance for excellent wet handling and braking.

Belt edge tape folding

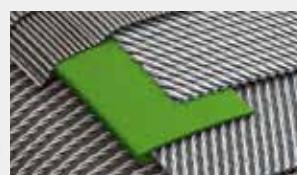

A rubber sheet, incorporated between 1st and 2nd belts help to prevent separation in the tire's belt edge and increase durability.




Conventional




KINERGY PT

Wide circumferential out grooves

Wide out grooves provide maximum water evacuation which promotes wet traction.

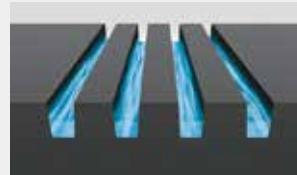

Conventional

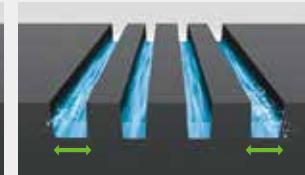


KINERGY PT

KINERGY ST (H735)

Standard touring all-season




Optimized block stiffness

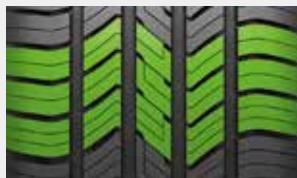


Optimized tread block stiffness ensures enhanced durability and tread uniformity for improved handling performance and mileage.

Optimized sipe design

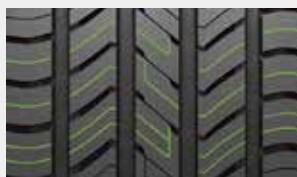

Multiple sipe improves riding comfort and reduces pass by noise.

Solid center rib

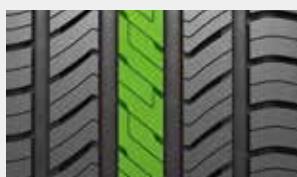

A rigid center rib provides excellent grip for outstanding dry handing and braking performance.

Notch sipes




Create biting edges offer great all-season traction in wet, dry and snowy conditions.

Warranty



Tie-bar

A block applied to the tie-bar of out lateral groove provides excellent handling and braking.

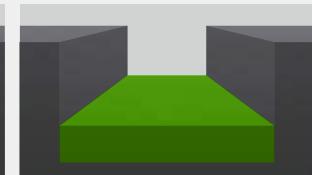

Conventional

KINERGY ST

About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

KINERGY 4S² (H750)

KINERGY 4S² X (H750A)

Just one for every weather



Test & Design award



Warranty




Unique V-shaped tread design

Well-connected grooves and 2-in-1 blocks enhance biting edge and digging force.



Serrated edge groove

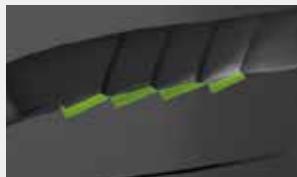

Serrated edge design at the end of the tread block maximises the edge effects and enhances winter driving performance.

The slush edge


The edge design, located on the groove enhances cornering performance in snow.



Conventional

KINERGY^{4S}²

Pitch numbers

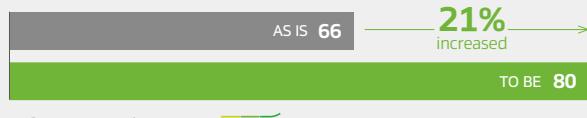

Helps effectively bite into the snow and improve the traction performance of the tires.

High-density summer sipes

Enhanced block stiffness provides better driving performance on dry roads.



Winter + Summer

Winter

Summer



3D winter sipes

Serrated winter sipes at the end of the tread provides improved braking performance in winter driving.




Pitch variation technology

Optimised pitch variation technology provides more comfortable driving.

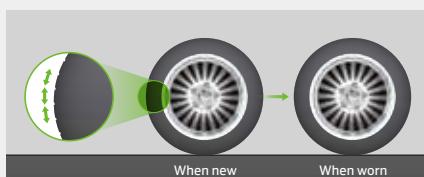

Concave tie-bar

Improve block stiffness by 4% and provide better handling performance.

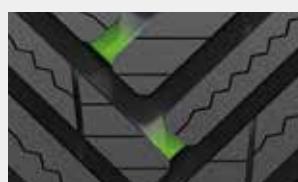

Inch	S-Code	Size	LI/SS	Sidewall	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Original Equipment	
					Rim Width Range	psi								
16	1032024	205/55R16	SL	91V	BSW	5.5-7.5	51	1,356	24.7	8.7	10.0	842	18.4	720/A/A
	1032025	205/60R16	SL	92V	BSW	5.5-7.5	51	1,389	25.5	8.7	10.0	816	20.0	720/A/A
	1032026	215/55R16	XL	97H	BSW	6.0-7.5	50	1,609	25.1	9.1	10.0	829	21.2	720/A/A
	1032027	215/60R16	SL	95V	BSW	6.0-7.5	51	1,521	25.9	9.0	10.0	801	20.1	720/A/A
17	1035765	195/60R17	SL	90V	BSW	5.5-7.0	51	1,323	26.0	8.3	10.0	799	20.5	720/A/A
	1032028	205/50R17	XL	93V	BSW	5.5-7.5	50	1,433	24.9	8.9	10.0	833	20.0	720/A/A
	1032029	205/55R17	SL	91H	BSW	5.5-7.5	51	1,356	25.7	8.7	10.0	808	20.0	720/A/A
	1032030	215/45R17	XL	91V	BSW	7.0-8.0	50	1,356	24.5	8.4	10.0	847	19.9	720/A/A
	1030844	215/45R17	XL	91H	BSW	7.0-8.0	50	1,356	24.4	8.9	9.5	850	19.3	620/A/A
	1032031	215/50R17	XL	95V	BSW	6.0-7.5	50	1,521	25.3	9.4	10.0	820	21.4	720/A/A
	1032032	215/55R17	SL	94V	BSW	6.0-7.5	51	1,477	26.2	9.1	10.0	794	21.7	720/A/A
	1032033	225/45R17	XL	94V	BSW	7.0-8.5	50	1,477	24.8	8.9	10.0	838	19.9	720/A/A
	1032034	225/50R17	SL	94V	BSW	6.0-8.0	51	1,477	25.7	9.7	10.0	808	21.0	720/A/A
	1032035	225/55R17	SL	97V	BSW	6.0-8.0	51	1,609	26.5	9.4	10.0	783	23.8	720/A/A
	1032036	225/60R17	SL	99H	BSW	6.0-8.0	51	1,709	27.4	9.3	10.0	757	25.3	720/A/A
	1032037	235/45R17	XL	97V	BSW	7.5-9.0	50	1,609	25.2	9.3	10.0	825	22.7	720/A/A
	1032038	235/50R17	SL	96V	BSW	6.5-8.5	51	1,565	26.1	10.1	10.0	797	23.4	720/A/A
	1032039	235/55R17	SL	99H	BSW	6.5-8.5	51	1,709	26.9	9.8	10.0	771	24.6	720/A/A
18	1032040	215/45R18	SL	89V	BSW	7.0-8.0	51	1,279	25.5	8.4	10.0	816	20.0	720/A/A
	1032041	215/55R18	SL	95H	BSW	6.0-7.5	51	1,521	27.0	9.1	10.0	768	22.5	720/A/A
	1032042	225/40R18	XL	92V	BSW	7.5-9.0	50	1,389	24.9	9.1	10.0	833	20.3	720/A/A
	1032043	225/45R18	XL	95V	BSW	7.0-8.5	50	1,521	25.8	8.9	10.0	806	21.9	720/A/A
	1032044	225/50R18	XL	99V	BSW	6.0-8.0	50	1,709	26.7	9.7	10.0	778	24.3	720/A/A
	1032045	225/55R18	SL	98V	BSW	6.0-8.0	51	1,653	27.5	9.4	10.0	755	25.0	720/A/A
	1032046	225/60R18	SL	100V	BSW	6.0-8.0	51	1,764	28.4	9.3	10.0	732	26.1	720/A/A
	1032047	235/40R18	XL	95V	BSW	8.0-9.5	50	1,521	25.3	9.5	10.0	822	21.8	720/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

HRS Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage, Road Hazard, and 30 Day Free Trial warranties do not apply to HRS Tires.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Kinergy XP | H446

Premium All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Original Equipment
18	1032048	235/45R18	SL	94V	BSW	7.5-9.0	51	1,477	26.1	9.3	10.0	795	22.0	720/A/A
	1032049	235/60R18	XL	107V	BSW	6.5-8.5	50	2,149	29.0	9.6	10.0	717	28.3	720/A/A
	1032050	245/40R18	XL	97V	BSW	8.0-9.5	50	1,609	25.6	9.8	10.0	812	23.8	720/A/A
	1032051	245/45R18	XL	100V	BSW	7.5-9.0	50	1,764	26.5	9.6	10.0	784	25.1	720/A/A
	1032052	245/50R18	SL	100V	BSW	7.0-8.5	51	1,764	27.4	10.6	10.0	757	25.4	720/A/A
19	1035766	195/50R19	SL	88V	BSW	5.5-7.0	51	1,235	26.5	8.4	10.0	785	20.2	720/A/A
	1032053	225/40R19	XL	93V	BSW	7.5-9.0	50	1,433	26.0	9.1	10.0	800	21.4	720/A/A
	1032017	225/55R19	SL	99V	BSW	6.0-8.0	51	1,709	28.5	9.4	10.0	728	26.1	720/A/A
	1032018	235/40R19	XL	96V	BSW	8.0-9.5	50	1,565	26.3	9.5	10.0	790	23.1	720/A/A
	1034713	235/45R19	XL	99H	BSW	7.5-9.0	51	1,521	27.2	9.3	10.0	765	23.5	720/A/A
	1032020	245/40R19	XL	98V	BSW	8.0-9.5	50	1,656	26.6	9.8	10.0	781	24.9	720/A/A
	1032021	245/45R19	XL	102V	BSW	7.5-9.0	50	1,874	27.4	9.6	10.0	757	26.1	720/A/A
	1032022	255/40R19	XL	100V	BSW	8.5-10.0	50	1,764	26.9	10.2	10.0	773	25.3	720/A/A
	1032023	255/45R19	XL	104V	BSW	8.0-9.5	50	1,984	27.9	10.1	10.0	744	28.5	720/A/A
	1032013	245/40R20	XL	99V	BSW	8.0-9.5	50	1,709	27.6	9.8	10.0	753	25.2	720/A/A
20	1032014	245/45R20	SL	99V	BSW	7.5-9.0	51	1,709	28.5	9.6	10.0	730	27.0	720/A/A
	1032015	245/50R20	SL	102V	BSW	7.0-8.5	51	1,874	29.6	10.5	10.0	703	29.8	720/A/A
	1032016	255/45R20	XL	105V	BSW	8.0-9.5	50	2,039	28.9	10.1	10.0	720	29.8	720/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

HRS Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage and Road Hazard warranties do not apply to HRS Tires.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Original Equipment	Tech	
						psi	lbs									
15	1022094	185/65R15	SL	88H	BSW	5.0-6.5	51	1,235	24.4	7.8	9.0	850	16.7	500/A/A	Hyundai Venue ('19-'24)	
	1015532	195/65R15	SL	91T	BSW	5.5-7.0	51	1,356	24.7	8.4	9.5	840	16.9	540/A/A	Hyundai Elantra ('15-'18)	
	1024032	195/65R15	SL	91H	BSW	5.5-7.0	51	1,356	24.8	8.3	8.5	838	16.9	540/A/A	Hyundai Elantra ('20-'26)	
16	1021366	195/60R16	SL	89H	BSW	5.5-7.0	51	1,279	25.1	8.6	10.0	827	19.9	540/A/A	Volkswagen Golf / Jetta ('15-'19)	
	1014871	205/55R16	SL	91H	BSW	5.5-7.5	51	1,356	24.8	6.4	10.0	837	20.4	540/A/A	Chevrolet Cruz ('16-'19)	
	1016295	205/55R16	SL	91H	BSW	5.5-7.5	51	1,356	24.8	9.1	8.5	839	18.4	520/B/A	Hyundai Elantra ('15-'18)	
	1015534	205/55R16	SL	91H	BSW	5.5-7.5	51	1,356	24.8	8.9	9.5	837	18.5	540/A/A	Toyota Corolla ('19-'25)	
	1022888	205/55R16	SL	91H	BSW	5.5-7.5	51	1,356	24.9	8.9	9.5	834	18.5	500/A/A	Hyundai Kona ('17-'24), Kia Soul ('18-'25)	
	1019647	205/60R16	SL	92H	BSW	5.5-7.5	51	1,389	25.8	8.6	9.5	806	19.6	500/A/A	Volkswagen Jetta ('17-'20)	
	1020211	205/60R16	SL	92H	BSW	5.5-7.5	51	1,389	25.7	8.8	10.0	807	20.8	500/B/A	Nissan Sentra ('19-'23)	
	1022795	205/60R16	SL	92H	BSW	5.5-7.5	51	1,389	25.8	8.7	9.5	804	20.3	500/A/A	Hyundai Sonata ('14-'18), Kia Optima ('15-'19)	
	1015397	205/65R16	SL	95H	BSW	5.5-7.5	51	1,521	26.2	8.5	10.0	793	21.9	500/A/A	Honda Civic_4DR ('15-'24)	
	1015886	215/55R16	SL	93H	BSW	6.0-7.5	51	1,433	25.1	9.1	9.5	827	20.4	500/A/A	Honda Civic_5DR ('21-'24)	
	1020876	215/55R16	SL	93H	BSW	6.0-7.5	51	1,433	25.1	9.1	9.5	827	21.5	500/A/A	Volkswagen Passat / Beetle ('14-'19)	
	1014971	215/60R16	SL	95T	BSW	6.0-7.5	51	1,521	26.2	8.9	10.0	793	23.4	540/A/A	Nissan Altima ('18-'25)	
	1020898	215/60R16	SL	95H	BSW	6.0-7.5	51	1,521	26.2	8.9	10.0	793	21.5	500/A/A	Chevrolet Trailblazer ('20-'21)	
	1021931	215/65R16	SL	98H	BSW	6.0-7.5	51	1,653	27.0	9.0	10.0	769	23.9	460/B/A	Volkswagen Jetta ('17-'20)	
17	1020212	205/55R17	SL	91H	BSW	5.5-7.5	51	1,356	25.9	9.2	10.0	803	20.9	500/B/A	Hyundai Sonata ('14-'19)	
	1016785	215/55R17	SL	94V	BSW	6.0-7.5	51	1,477	26.1	9.3	10.0	795	22.5	500/A/A	Hyundai Kona ('17-'20), Kia Soul ('18-'25)	
	1020513	215/55R17	SL	94V	BSW	6.0-7.5	51	1,477	26.2	9.3	10.0	793	23.0	500/A/A	Volkswagen Passat / Beetle ('14-'19)	
	1014972	215/55R17	SL	94H	BSW	6.0-7.5	51	1,477	26.3	9.4	10.0	789	22.5	540/A/A	Hyundai Kona ('20-'23)	
	1025644	215/55R17	SL	94V	BSW	6.0-7.5	51	1,477	26.2	9.3	9.5	793	22.9	500/A/A	Honda HR-V ('22-'27)	
	1025718	215/60R17	SL	96H	BSW	6.0-7.5	51	1,565	27.1	9.1	8.5	766	23.2	480/A/A	Volkswagen Golf ('14-'18)	
	1014872	225/45R17	SL	91H	BSW	7.0-8.5	51	1,356	24.9	9.3	10.0	835	21.8	540/A/A	Hyundai Elantra ('20-'26)	
	1024034	225/45R17	SL	91W	BSW	7.0-8.5	51	1,356	24.8	9.2	8.5	839	20.5	540/A/A	Hyundai Elantra HEV ('20-'26)	
	1028628	225/45R17	SL	91W	BSW	7.0-8.5	51	1,356	24.8	9.2	8.5	839	20.2	540/A/A	Honda Accord ('17-'27)	
	1017808	225/50R17	SL	94V	BSW	6.0-8.0	51	1,477	25.9	9.4	9.0	801	22.8	500/A/A	Volkswagen Taos ('21-'22)	
	1024767	225/55R17	SL	97H	BSW	6.0-8.0	51	1,609	26.7	9.7	8.5	779	24.3	540/A/A	Hyundai Tucson ('15-'21), Kia Sportage ('15-'21)	
	1015527	225/60R17	SL	99H	BSW	6.0-8.0	51	1,709	27.6	9.6	10.0	751	26.0	540/A/A	Honda CR-V ('16-'27)	
	1019226	235/65R17	SL	104H	BSW	6.5-8.5	51	1,984	29.3	9.1	10.0	709	28.7	540/A/A		

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

HRS Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage, Road Hazard, and 30 Day Free Trial warranties do not apply to HRS Tires.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Kinergy GT | H436

Grand Touring All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Rev/Mile	Weight	UTQG	Original Equipment	Tech
						psi	lbs								
17	1021367	245/50R17	SL	99V	BSW	7.0-8.5	51	1,709	26.6	10.7	10.0	781	26.8	540/A/A	Chevrolet Malibu ('16-'24)
	1015891	P225/55R17	SL	95H	BSW	6.0-8.0	51	1,521	26.7	9.4	9.0	779	23.3	540/B/A	
18	1022797	215/45R18	SL	89V	BSW	7.0-8.0	51	1,279	25.6	9.1	9.0	812	21.5	500/A/A	Nissan Sentra ('19-'25)
	1020213	225/45R18	SL	91H	BSW	7.0-8.5	51	1,356	25.9	9.4	10.0	802	21.1	540/B/A	Volkswagen Jetta ('17-'23)
	1028351	225/45R18	SL	91H	BSW	7.0-8.5	51	1,356	25.9	9.4	9.0	801	20.9	620/B/A	Volkswagen Jetta GLI ('23-'29)
	1021933	225/55R18	SL	98H	BSW	6.0-8.0	51	1,653	27.6	9.6	10.0	751	26.7	700/B/A	Chevrolet Trailblazer ('20-'26)
	1025719	225/55R18	SL	98H	BSW	6.0-8.0	51	1,653	27.7	9.6	9.0	749	26.5	480/A/A	Honda HR-V ('22-'27)
	1020853	235/45R18	SL	94V	BSW	7.5-9.0	51	1,477	26.3	9.6	10.0	790	24.4	540/A/A	Toyota Camry ('17-'24)
	1014973	235/45R18	SL	94H	BSW	7.5-9.0	51	1,477	26.3	9.7	10.0	790	24.1	540/A/A	Volkswagen Passat / Beetle ('14-'19)
	1031294	235/45R18	SL	94V	BSW	7.5-9.0	51	1,477	26.3	9.6	9.5	790	25.0	540/A/A	Tesla Model 3 ('21-'27) EV
	1031546	235/45R18	SL	94V	BSW	7.5-9.0	51	1,477	26.3	9.6	9.5	790	25.6	540/A/A	Tesla Model 3 ('21-'23) EV, SOA
	1017534	235/60R18	SL	103H	BSW	6.5-8.5	51	1,929	29.3	9.8	10.0	709	30.1	540/A/A	Honda CR-V ('16-'27), Honda Clarity ('24-'29)
19	1018940	235/40R19	SL	92V	BSW	8.0-9.5	51	1,389	26.3	9.8	10.0	791	25.3	500/A/A	Nissan Altima ('18-'25)
	1024217	235/50R19	SL	99H	BSW	6.5-8.5	51	1,709	28.2	10.2	10.0	736	28.1	500/A/A	Chevrolet Equinox ('17-'24), GMC Terrain ('17-'24)
	1015528	245/45R19	SL	98H	BSW	7.5-9.0	51	1,653	27.4	10.0	10.0	759	27.7	540/A/A	Hyundai Tucson ('15-'21), Kia Sportage ('15-'21)

Kinergy GT Runflat | H436B

Grand Touring All-Season/Runflat

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Rev/Mile	Weight	UTQG	Original Equipment	Tech
						psi	lbs								
17	1020496	205/55R17	SL	91H	BSW	5.5-7.5	51	1,356	25.9	8.7	9.5	803	24.5	500/A/A	Mercedes Benz A-Class / B-Class ('18-'25) HRS
18	1019371	225/60R18	XL	104H	BSW	6.0-8.0	50	1,984	28.6	9.5	9.5	726	36.1	500/A/A	BMW X3 / X4 ('17-'24) HRS

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

HRS Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage and Road Hazard warranties do not apply to HRS Tires.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

About Hankook

ION

Ventus

Weatherflex

Dynapro

Winter

Vantra

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	
						psi	lbs							
15	1025056	185/55R15	SL	82V	BSW	5.0-6.5	51	1,047	22.9	7.9	10.0	908	16.2	800/A/A
	1021404	185/60R15	SL	84T	BSW	5.0-6.5	51	1,102	23.6	8.0	11.0	880	17.0	860/A/A
	1025057	185/65R15	SL	88H	BSW	5.0-6.5	51	1,235	24.3	7.8	11.0	854	17.4	860/A/A
	1025058	195/55R15	SL	85V	BSW	5.5-7.0	51	1,135	23.3	8.2	10.0	893	17.2	800/A/A
	1021394	195/60R15	SL	88H	BSW	5.5-7.0	51	1,235	24.1	8.5	10.5	862	18.1	860/A/A
	1021389	195/65R15	SL	91H	BSW	5.5-7.0	51	1,356	24.9	8.4	11.0	835	19.0	860/A/A
	1021410	205/60R15	SL	91H	BSW	5.5-7.5	51	1,356	24.6	8.9	11.0	846	19.6	860/A/A
	1023464	205/65R15	SL	94H	BSW	5.5-7.5	51	1,477	25.3	8.7	11.0	819	20.8	860/A/A
	1021402	205/70R15	SL	96T	BSW	5.0-7.0	51	1,565	26.2	8.4	11.0	792	21.8	860/A/A
	1023465	215/60R15	SL	94H	BSW	6.0-7.5	51	1,477	25.0	9.3	11.0	830	21.6	860/A/A
	1021395	215/70R15	SL	98T	BSW	5.5-7.0	51	1,653	26.8	8.9	10.5	776	23.7	860/A/A
	1021411	225/70R15	SL	100T	BSW	6.0-7.5	51	1,764	27.3	9.1	11.0	760	25.0	860/A/A
	1021412	235/70R15	SL	103T	BSW	6.0-8.0	51	1,929	27.9	9.6	11.0	745	26.3	860/A/A
	1021359	235/75R15	XL	109T	BSW	6.0-8.0	50	2,271	28.7	9.3	10.5	723	28.7	860/A/A
16	1025059	185/55R16	SL	83H	BSW	5.0-6.5	51	1,074	23.9	7.9	11.0	870	17.6	860/A/A
	1025060	195/55R16	SL	87V	BSW	5.5-7.0	51	1,202	24.3	8.2	10.0	856	18.4	800/A/A
	1021390	205/55R16	SL	91H	BSW	5.5-7.5	51	1,356	24.8	8.9	11.0	838	20.1	860/A/A
	1021398	205/60R16	SL	92H	BSW	5.5-7.5	51	1,389	25.6	8.9	10.5	813	21.0	860/A/A
	1021391	205/65R16	SL	95H	BSW	5.5-7.5	51	1,521	26.3	8.7	11.0	788	22.2	860/A/A
	1027450	205/70R16	SL	97H	BSW	5.0-7.0	51	1,609	27.3	8.2	11.0	762	23.6	860/A/A
	1025061	215/55R16	SL	93H	BSW	6.0-7.5	51	1,433	25.1	9.2	11.0	827	21.1	860/A/A
	1023419	215/60R16	SL	95H	BSW	6.0-7.5	51	1,521	26.0	9.1	11.0	798	23.1	860/A/A
	1023466	215/65R16	SL	98H	BSW	6.0-7.5	51	1,653	26.9	9.0	11.0	772	24.8	860/A/A
	1021387	225/60R16	SL	98H	BSW	6.0-8.0	51	1,653	26.5	8.4	11.0	784	25.5	860/A/A
	1021386	225/65R16	SL	100T	BSW	6.0-8.0	51	1,764	27.4	9.3	11.0	759	25.2	860/A/A
	1021406	235/60R16	SL	100H	BSW	6.5-8.5	51	1,764	27.0	9.9	11.0	770	26.2	860/A/A
	1021392	235/65R16	SL	103T	BSW	6.5-8.5	51	1,929	27.9	9.7	11.0	744	26.9	860/A/A
17	1025062	205/50R17	SL	93V	BSW	5.5-7.5	50	1,433	25.0	8.9	10.0	832	20.6	800/A/A
	1025063	215/45R17	SL	87V	BSW	7.0-8.0	51	1,202	24.5	8.7	10.0	848	19.1	800/A/A
	1025064	215/50R17	XL	95V	BSW	6.0-7.5	50	1,521	25.4	9.2	10.0	819	23.2	800/A/A
	1025065	215/55R17	SL	94V	BSW	6.0-7.5	51	1,477	26.2	9.2	10.0	794	22.3	800/A/A
	1021405	215/60R17	SL	96H	BSW	6.0-7.5	51	1,565	27.1	9.3	11.0	768	24.9	860/A/A
	1021407	215/65R17	SL	99T	BSW	6.0-7.5	51	1,709	27.9	9.0	11.0	744	25.7	860/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

* Tires with a "V" speed rating have a 75K mile warranty.

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	
						psi	lbs							
17	1025066	225/45R17	XL	94V	BSW	7.0-8.5	50	1,477	24.8	9.2	10.0	837	20.4	800/A/A
	1025067	225/50R17	SL	94V	BSW	6.0-8.0	51	1,477	25.8	9.6	10.0	806	22.3	800/A/A
	1021400	225/55R17	SL	97H	BSW	6.0-8.0	51	1,609	26.7	9.8	11.0	779	25.7	860/A/A
	1021393	225/60R17	SL	99H	BSW	6.0-8.0	51	1,709	27.5	9.6	10.5	754	26.5	860/A/A
	1021397	225/65R17	SL	102H	BSW	6.0-8.0	51	1,874	28.4	9.4	11.0	731	27.1	860/A/A
	1025068	235/45R17	XL	97V	BSW	7.5-9.0	50	1,609	25.2	9.6	10.0	824	23.0	800/A/A
	1025069	235/50R17	SL	96V	BSW	6.5-8.5	51	1,565	26.2	10.1	10.0	794	25.8	800/A/A
	1025070	235/55R17	SL	99H	BSW	6.5-8.5	51	1,709	27.0	9.8	11.0	769	26.8	860/A/A
	1021409	235/60R17	SL	102T	BSW	6.5-8.5	51	1,874	28.0	9.9	11.0	742	28.0	860/A/A
	1025071	235/65R17	SL	104H	BSW	6.5-8.5	51	1,984	28.9	9.8	11.0	718	28.4	860/A/A
	1025072	245/45R17	XL	99H	BSW	7.5-9.0	50	1,709	25.5	9.9	11.0	814	24.6	860/A/A
18	1021408	215/55R18	SL	95H	BSW	6.0-7.5	51	1,521	27.2	9.2	11.0	764	25.2	860/A/A
	1025073	225/40R18	XL	92V	BSW	7.5-9.0	50	1,389	24.9	9.4	10.0	833	20.8	800/A/A
	1025074	225/45R18	XL	95V	BSW	7.0-8.5	50	1,521	25.8	9.2	10.0	805	23.1	800/A/A
	1021403	225/50R18	SL	95H	BSW	6.0-8.0	51	1,521	26.8	9.8	11.0	775	25.4	860/A/A
	1021396	225/55R18	SL	98H	BSW	6.0-8.0	51	1,653	27.7	9.8	11.0	751	27.1	860/A/A
	1025075	225/60R18	SL	100H	BSW	6.0-8.0	51	1,764	28.5	9.1	11.0	729	27.9	860/A/A
	1025076	235/45R18	SL	94V	BSW	7.5-9.0	51	1,477	26.2	9.6	10.0	793	22.6	800/A/A
	1025077	235/50R18	SL	97V	BSW	6.5-8.5	51	1,609	27.2	10.1	10.0	765	26.9	800/A/A
	1025078	235/55R18	SL	100V	BSW	6.5-8.5	51	1,764	28.0	9.8	10.0	741	28.2	800/A/A
	1025079	235/60R18	XL	107V	BSW	6.5-8.5	50	2,149	29.0	9.6	10.5	717	29.5	800/A/A
	1025080	245/40R18	XL	97V	BSW	8.0-9.5	50	1,609	25.6	10.1	10.0	813	24.1	800/A/A
	1025081	245/45R18	XL	100V	BSW	7.5-9.0	50	1,764	26.5	9.9	10.0	783	26.1	800/A/A
	1025082	245/50R18	SL	100V	BSW	7.0-8.5	51	1,764	27.5	10.5	10.0	754	28.5	800/A/A
	1025083	245/55R18	SL	103V	BSW	7.0-8.5	51	1,929	28.5	10.4	10.0	729	30.1	800/A/A
19	1025084	235/40R19	XL	96V	BSW	8.0-9.5	50	1,565	26.3	9.8	10.0	791	24.8	800/A/A
	1025085	245/40R19	XL	98V	BSW	8.0-9.5	50	1,653	26.6	10.1	10.0	782	26.8	800/A/A
	1025086	245/45R19	XL	102V	BSW	7.5-9.0	50	1,874	27.5	9.9	10.0	755	28.4	800/A/A
	1025087	255/45R19	XL	104V	BSW	8.0-9.5	50	1,984	27.9	10.4	10.0	744	28.7	800/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

* Tires with a "V" speed rating have a 75K mile warranty.

About Hankook

ION

Ventus

Weatherflex

Dynapro

Winter

Vantra

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	
						psi	lbs							
13	1022033	175/70R13	SL	82T	BSW	4.5-6.0	51	1,047	22.6	7.0	8.5	920	13.7	680/A/A
14	1022037	175/65R14	SL	82T	BSW	5.0-6.0	51	1,047	22.9	7.3	8.5	909	14.3	680/A/A
	1021903	175/70R14	SL	84T	BSW	4.5-6.0	51	1,102	23.6	7.4	8.5	882	15.0	680/A/A
	1021904	185/60R14	SL	82T	BSW	5.0-6.5	51	1,047	22.6	8.0	8.5	918	14.8	680/A/A
	1021905	185/65R14	SL	86T	BSW	5.0-6.5	51	1,168	23.3	8.0	8.5	891	15.8	680/A/A
	1021906	185/70R14	SL	88T	BSW	4.5-6.0	51	1,235	24.1	7.7	8.5	861	16.0	680/A/A
	1022038	185/75R14	SL	89T	BSW	4.5-6.0	51	1,279	24.8	7.2	8.5	837	16.0	680/A/A
	1024733	185/75R14	SL	89T	WSW	4.5-6.0	51	1,279	24.8	7.2	8.5	837	16.7	680/A/A
	1021907	195/60R14	SL	86T	BSW	5.5-7.0	51	1,168	23.1	8.5	8.5	900	16.5	680/A/A
	1021908	195/70R14	SL	91T	BSW	5.0-6.5	51	1,356	24.7	8.2	8.5	842	17.3	680/A/A
	1022039	195/75R14	SL	92T	BSW	5.0-6.5	51	1,389	25.4	7.6	8.5	819	17.5	680/A/A
	1024734	195/75R14	SL	92T	WSW	5.0-6.5	51	1,389	25.4	7.6	8.5	819	18.6	680/A/A
	1022040	205/70R14	SL	95T	BSW	5.0-7.0	51	1,521	25.2	8.2	8.5	824	18.7	680/A/A
	1022041	205/75R14	SL	95T	BSW	5.0-7.0	51	1,521	26.0	7.8	8.5	799	18.9	680/A/A
	1024735	205/75R14	SL	95T	WSW	5.0-7.0	51	1,521	26.0	7.8	8.5	799	19.8	680/A/A
	1021909	215/70R14	SL	96T	BSW	5.5-7.0	51	1,565	25.8	8.9	8.5	806	20.1	680/A/A
	1021910	215/75R14	SL	100T	BSW	5.5-7.0	51	1,764	26.6	8.6	8.5	782	20.6	680/A/A
	1024736	215/75R14	SL	100T	WSW	5.5-7.0	51	1,764	26.6	8.4	8.5	782	21.0	680/A/A
	1021911	225/70R14	SL	99T	BSW	6.0-7.5	51	1,709	26.3	9.1	8.5	789	22.3	680/A/A
15	1024758	175/65R15	SL	84H	BSW	5.0-6.0	51	1,102	23.9	7.3	8.5	871	15.1	680/A/A
	1021912	185/60R15	SL	84T	BSW	5.0-6.5	51	1,102	23.6	8.0	8.5	880	15.4	680/A/A
	1021913	185/65R15	SL	88T	BSW	5.0-6.5	51	1,235	24.3	8.0	8.5	854	16.7	680/A/A
	1021914	195/60R15	SL	88T	BSW	5.5-7.0	51	1,235	24.1	8.5	8.5	862	17.4	680/A/A
	1021915	195/65R15	SL	91T	BSW	5.5-7.0	51	1,356	24.9	8.4	8.5	835	17.9	680/A/A
	1021916	205/60R15	SL	91T	BSW	5.5-7.5	51	1,356	24.6	8.7	8.5	846	18.3	680/A/A
	1021917	205/65R15	SL	94T	BSW	5.5-7.5	51	1,477	25.3	8.7	8.5	819	19.0	680/A/A
	1022042	205/70R15	SL	96T	BSW	5.0-7.0	51	1,565	26.2	8.2	8.5	792	19.4	680/A/A
	1022043	205/75R15	SL	97T	BSW	5.0-7.0	51	1,609	27.0	7.8	8.5	769	20.1	680/A/A
	1024737	205/75R15	SL	97T	WSW	5.0-7.0	51	1,609	27.0	7.8	8.5	769	21.0	680/A/A
	1021918	215/65R15	SL	96T	BSW	6.0-7.5	51	1,565	25.9	9.0	8.5	802	20.3	680/A/A
	1021919	215/70R15	SL	98T	BSW	5.5-7.0	51	1,653	26.8	8.9	8.5	776	22.2	680/A/A
	1022044	215/75R15	SL	100T	BSW	5.5-7.0	51	1,764	27.6	8.4	8.5	754	22.5	680/A/A
	1024738	215/75R15	SL	100T	WSW	5.5-7.0	51	1,764	27.6	8.4	8.5	754	23.3	680/A/A
	1022045	225/70R15	SL	100T	BSW	6.0-7.5	51	1,764	27.3	8.9	8.5	760	23.3	680/A/A
	1022046	225/75R15	SL	102T	BSW	6.0-7.5	51	1,874	28.2	8.5	8.5	737	24.3	680/A/A
	1024739	225/75R15	SL	102T	WSW	6.0-7.5	51	1,874	28.2	8.5	8.5	737	24.3	680/A/A
	1024759	235/60R15	SL	98T	RWL	6.5-8.5	51	1,653	26.0	9.7	8.5	800	23.9	680/A/A
	1021920	235/70R15	SL	103T	BSW	6.0-8.0	51	1,929	27.9	9.6	8.5	745	24.7	680/A/A
	1022047	235/75R15	SL	105T	BSW	6.0-8.0	51	2,039	28.7	9.1	8.5	723	26.6	680/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Kinergy ST | H735

Standard Touring All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	
						psi	lbs							
15	1024740	235/75R15	SL	105T	WSW	6.0-8.0	51	2,039	28.7	9.1	8.5	723	26.9	680/A/A
	1024760	245/60R15	SL	101T	RWL	7.0-8.5	51	1,819	26.4	10.0	8.5	785	25.6	680/A/A
	1024761	255/60R15	SL	102T	RWL	7.0-9.0	51	1,874	26.9	10.3	8.5	771	26.8	680/A/A
	1024746	255/70R15	SL	108T	RWL	6.5-8.5	51	2,205	29.0	10.1	8.5	717	28.9	680/A/A
	1024777	P265/50R15	SL	99T	RWL	7.5-9.5	51	1,720	25.3	11.4	10.5	821	26.5	680/A/A
	1024762	P275/60R15	SL	107T	RWL	7.5-9.5	51	2,149	27.9	11.0	10.5	745	30.0	680/A/A
	1024763	P295/50R15	SL	105T	RWL	8.0-10.5	51	2,061	26.5	12.6	10.5	784	30.2	680/A/A
16	1021503	205/55R16	SL	91H	BSW	5.5-7.5	51	1,356	24.8	8.8	8.5	838	18.4	680/A/A
	1021500	205/60R16	SL	92T	BSW	5.5-7.5	51	1,389	25.6	8.7	8.5	813	19.5	680/A/A
	1021498	205/65R16	SL	95H	BSW	5.5-7.5	51	1,521	26.3	8.7	8.5	788	19.8	680/A/A
	1025088	215/55R16	XL	97H	BSW	6.0-7.5	50	1,609	25.1	9.2	8.5	827	21.4	680/A/A
	1021496	215/60R16	SL	95H	BSW	6.0-7.5	51	1,521	26.1	9.3	8.5	797	20.7	680/A/A
	1022048	215/65R16	SL	98T	BSW	6.0-7.5	51	1,653	26.9	8.8	8.5	772	22.1	680/A/A
	1021504	215/70R16	SL	100T	BSW	5.5-7.0	51	1,764	27.8	8.9	8.5	748	23.4	680/A/A
	1021495	225/60R16	SL	98T	BSW	6.0-8.0	51	1,653	26.5	9.6	8.5	784	23.1	680/A/A
	1025089	225/65R16	SL	100T	BSW	6.0-8.0	51	1,764	27.4	9.1	8.5	759	23.6	680/A/A
	1021506	225/70R16	SL	103T	BSW	6.0-7.5	51	1,929	28.3	9.1	8.5	734	24.8	680/A/A
	1021501	235/60R16	SL	100T	BSW	6.5-8.5	51	1,764	27.0	9.9	8.5	770	24.7	680/A/A
	1021499	235/65R16	SL	103T	BSW	6.5-8.5	51	1,929	27.9	9.7	8.5	744	25.5	680/A/A
17	1021508	215/50R17	SL	91H	BSW	6.0-7.5	51	1,356	25.4	9.4	8.5	818	19.3	680/A/A
	1021509	215/55R17	SL	94H	BSW	6.0-7.5	51	1,477	26.2	9.3	8.5	793	20.6	680/A/A
	1021502	215/60R17	SL	96T	BSW	6.0-7.5	51	1,565	27.1	9.3	8.5	768	23.0	680/A/A
	1021505	215/65R17	SL	99T	BSW	6.0-7.5	51	1,709	27.9	9.0	8.5	744	23.3	680/A/A
	1025090	225/45R17	SL	91H	BSW	7.0-8.5	51	1,356	24.8	9.2	8.5	837	18.9	680/A/A
	1021511	225/50R17	SL	94T	BSW	6.0-8.0	51	1,477	25.8	9.8	8.5	805	20.6	680/A/A
	1025091	225/55R17	SL	97H	BSW	6.0-8.0	51	1,609	26.6	9.6	8.5	780	23.5	680/A/A
	1021497	225/60R17	SL	99T	BSW	6.0-8.0	51	1,709	27.5	9.6	8.5	754	24.4	680/A/A
	1021507	225/65R17	SL	102T	BSW	6.0-8.0	51	1,874	28.4	9.4	8.5	731	24.7	680/A/A
	1025092	235/55R17	SL	99H	BSW	6.5-8.5	51	1,709	27.0	10.1	8.5	769	24.8	680/A/A
	1025093	235/60R17	SL	102T	BSW	6.5-8.5	51	1,874	28.0	9.6	8.5	742	25.1	680/A/A
	1021510	235/65R17	SL	104H	BSW	6.5-8.5	51	1,984	28.9	9.7	8.5	718	26.5	680/A/A
	1025094	245/45R17	XL	99H	BSW	7.5-9.0	50	1,709	25.5	9.9	8.5	814	22.8	680/A/A
18	1025095	225/50R18	XL	99T	BSW	6.0-8.0	50	1,709	26.8	9.5	8.5	776	23.4	680/A/A
	1025096	225/55R18	SL	98H	BSW	6.0-8.0	51	1,653	27.6	9.6	8.5	752	24.8	680/A/A
	1025097	225/60R18	SL	100H	BSW	6.0-8.0	51	1,764	28.5	9.3	8.5	729	25.6	680/A/A
	1025098	235/55R18	SL	100H	BSW	6.5-8.5	51	1,764	28.0	10.1	8.5	741	25.7	680/A/A
	1025099	235/60R18	XL	107H	BSW	6.5-8.5	50	2,149	29.0	9.6	8.5	717	28.0	680/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

About Hankook

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Inch	S-Code	Size	L/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	
						psi	lbs								
15	1026501	185/65R15	SL	88H	BSW	5.0-6.5	51	1,235	24.3	7.8	9.5	851	16.4	500/A/A	3PMST
	1024946	195/60R15	SL	88V	BSW	5.5-7.0	51	1,235	24.1	8.2	9.5	858	17.0	500/A/A	3PMST
	1026493	195/65R15	SL	91H	BSW	5.0-6.5	51	1,356	24.8	8.1	9.5	835	18.1	500/A/A	3PMST
	1024949	205/65R15	SL	94H	BSW	5.5-7.5	51	1,477	25.3	8.5	10.0	819	19.6	500/A/A	3PMST
16	1026993	205/55R16	SL	91V	BSW	5.5-7.5	51	1,356	24.7	8.7	9.5	837	19.6	500/A/A	3PMST
	1026944	205/60R16	XL	96V	BSW	5.5-7.5	50	1,565	25.6	8.6	9.5	810	20.8	500/A/A	3PMST
	1027001	205/65R16	SL	95H	BSW	5.5-7.5	51	1,521	26.5	8.1	9.5	784	20.7	500/A/A	3PMST
	1024954	215/55R16	XL	97V	BSW	6.0-7.5	50	1,609	25.1	9.1	10.0	825	21.9	500/A/A	3PMST
	1026994	215/60R16	SL	95V	BSW	6.0-7.5	51	1,521	26.0	9.0	9.5	796	22.0	500/A/A	3PMST
	1026945	215/65R16	XL	102V	BSW	6.0-7.5	50	1,874	26.9	8.8	9.5	771	22.3	500/A/A	3PMST
	1027003	215/70R16	SL	100H	BSW	5.5-7.0	51	1,764	27.7	8.7	10.0	749	23.7	500/A/A	3PMST
	1027002	225/60R16	SL	98H	BSW	6.0-8.0	51	1,653	26.4	9.3	10.0	784	23.5	500/A/A	3PMST
17	1024957	205/50R17	XL	93W	BSW	5.5-7.5	50	1,433	25.0	8.8	10.0	828	19.3	500/A/A	3PMST
	1024960	215/45R17	XL	91W	BSW	7.0-8.0	50	1,356	24.6	8.3	9.5	841	19.4	500/A/A	3PMST
	1024959	215/50R17	XL	95W	BSW	6.0-8.0	50	1,521	25.4	9.4	10.0	815	22.0	500/A/A	3PMST
	1027005	215/55R17	SL	94V	BSW	6.0-7.5	51	1,477	26.1	9.2	10.0	793	21.1	500/A/A	3PMST
	1026500	225/45R17	XL	94W	BSW	7.0-8.5	50	1,477	24.8	9.2	8.5	835	20.3	500/A/A	3PMST
	1026943	225/50R17	XL	98V	BSW	6.0-8.0	51	1,477	25.8	9.7	10.0	804	23.9	500/A/A	3PMST
	1024963	225/55R17	XL	101W	BSW	6.0-8.0	50	1,819	26.6	9.6	10.0	780	25.1	500/A/A	3PMST
	1027007	235/50R17	SL	96V	BSW	6.5-8.5	51	1,565	26.3	9.6	10.0	788	23.9	500/A/A	3PMST
	1026995	235/55R17	SL	99W	BSW	6.5-8.5	51	1,709	27.0	10.0	9.5	768	26.2	500/A/A	3PMST
	1027006	235/60R17	SL	102H	BSW	6.5-8.5	51	1,874	27.9	9.7	10.0	743	25.9	500/A/A	3PMST
18	1027000	225/40R18	XL	92W	BSW	7.5-9.0	50	1,389	24.9	9.4	10.0	830	20.1	500/A/A	3PMST
	1026996	225/45R18	XL	95W	BSW	7.0-8.5	50	1,521	25.8	9.2	9.5	803	22.8	500/A/A	3PMST
	1027011	225/50R18	SL	95W	BSW	6.0-8.0	51	1,521	26.9	9.0	9.5	771	24.1	500/A/A	3PMST
	1027010	225/55R18	SL	98V	BSW	6.0-8.0	51	1,653	27.8	9.1	10.0	748	26.1	500/A/A	3PMST
	1027009	225/60R18	SL	100H	BSW	6.0-8.0	51	1,764	28.6	9.0	10.0	726	26.1	500/A/A	3PMST
	1026997	235/45R18	XL	98W	BSW	7.5-9.0	50	1,653	26.3	9.3	10.0	788	24.2	500/A/A	3PMST
	1024969	235/50R18	XL	101V	BSW	6.5-8.5	50	1,819	27.4	9.5	9.5	757	25.8	500/A/A	3PMST
	1024978	245/40R18	XL	97V	BSW	8.0-9.5	50	1,609	25.7	9.6	10.0	806	23.4	500/A/A	3PMST
	1026998	245/45R18	SL	96W	BSW	7.5-9.0	51	1,565	26.6	9.5	9.5	780	25.6	500/A/A	3PMST
	1027016	235/40R19	SL	92W	BSW	8.0-9.5	51	1,389	26.3	9.8	9.5	790	21.7	500/A/A	3PMST
19	1027014	245/40R19	SL	94W	BSW	8.0-9.5	51	1,477	26.6	10.1	10.0	781	23.9	500/A/A	3PMST
	1027015	245/45R19	SL	98W	BSW	7.5-9.0	51	1,653	27.5	9.9	9.5	754	26.4	500/A/A	3PMST

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

HRS Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage, Road Hazard, and 30 Day Free Trial warranties do not apply to HRS Tires.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Kinergy 4S² X | H750A

Premium All-Weather

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	
						psi	lbs								
16	1027004	235/70R16	SL	106H	BSW	6.0-8.0	51	2,094	28.9	9.4	10.0	719	27.0	500/A/A	3PMSF
17	1025469	225/60R17	SL	99H	BSW	6.0-8.0	51	1,709	27.5	9.3	10.0	755	25.2	500/A/A	3PMSF
	1025468	225/65R17	XL	106H	BSW	6.0-8.0	50	2,094	28.4	9.1	10.0	732	26.8	500/A/A	3PMSF
	1025470	235/65R17	XL	108V	BSW	6.5-8.5	50	2,205	28.9	9.5	9.5	719	28.6	500/A/A	3PMSF
	1027008	245/65R17	SL	107H	BSW	7.0-8.5	51	2,149	29.5	9.7	10.5	705	29.3	500/A/A	3PMSF
18	1025473	235/55R18	XL	104V	BSW	6.5-8.5	50	1,984	28.0	10.0	10.0	742	28.0	500/A/A	3PMSF
	1025471	235/60R18	XL	107W	BSW	6.5-8.5	50	2,149	29.0	9.7	10.0	717	27.9	500/A/A	3PMSF
	1027013	235/65R18	SL	106V	BSW	6.5-8.5	51	2,094	29.9	9.5	10.5	696	29.6	500/A/A	3PMSF
	1027012	245/60R18	SL	105V	BSW	7.0-8.5	51	2,039	29.4	10.0	10.5	706	29.6	500/A/A	3PMSF
	1031811	265/60R18	SL	110V	BSW	7.5-9.5	51	2,337	30.4	10.9	10.0	683	33.6	500/A/A	3PMSF
19	1031810	225/55R19	SL	99V	BSW	6.0-8.0	51	1,709	28.5	9.5	10.0	728	27.2	500/A/A	3PMSF
	1025474	235/55R19	XL	105W	BSW	6.5-8.5	50	2,039	29.0	10.0	10.0	717	29.2	500/A/A	3PMSF
	1031809	245/55R19	SL	103V	BSW	7.0-8.5	51	1,929	29.5	10.4	10.0	704	30.2	500/A/A	3PMSF
	1032858	255/60R19	SL	109V	BSW	7.0-9.0	51	2,271	30.9	10.5	10.0	671	33.3	500/A/A	3PMSF
20	1031807	235/55R20	SL	102V	BSW	6.5-8.5	51	1,874	30.1	9.8	10.0	691	29.9	500/A/A	3PMSF
	1027017	245/50R20	SL	102V	BSW	7.0-8.5	51	1,874	29.6	10.5	10.0	704	30.8	500/A/A	3PMSF

About Hankook

ION

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

HRS Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage and Road Hazard warranties do not apply to HRS Tires.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle



A large, diagonal photograph occupies the left side of the page, showing a dark-colored car driving through a heavy downpour. The road ahead is blurred by the rain, and snow-capped mountains are visible in the distance under a cloudy sky.

About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Weatherflex

CAR / SUV

Weatherflex GT | H755 & H755A

Weatherflex GT (H755 / H755A)

All-Climate Confidence



Warranty





Designed for Confident Driving on Snowy Roads

Higher sipe density enhances traction in snow. Added sipes to the center and shoulder blocks boost snow performance.


Additional Stiffness Improves Handling Performance

An outer chamfer added to the block increases volume and stiffness, providing stable ground pressure for improved handling.



Designed to Prevent Irregular Wear and Enhance Mileage

The Weatherflex GT design evenly distributes pressure to prevent irregular wear for a longer-lasting tire.

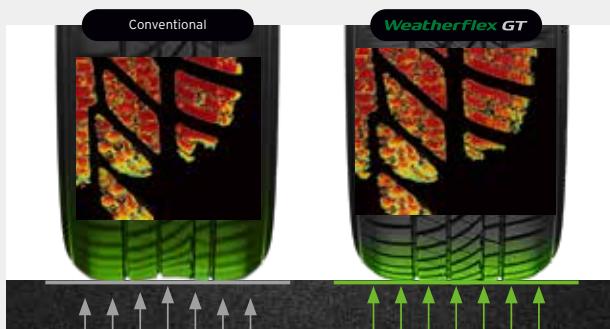

3PMSF Certified

3PMSF (Three-Peak Mountain Snowflake) certification assures top performance on snowy roads and harsh winter conditions.




Zig-Zag Groove Improves Cornering Performance

Zig-Zag Groove enhances cornering grip in the snow by contacting the road at various angles.




3D GripKontrol Sipes Dry & Wet

Interlocking (Wave-Type) 3D sipes minimize block deformation when driving. The increased block stiffness improves handling in both wet and dry conditions.

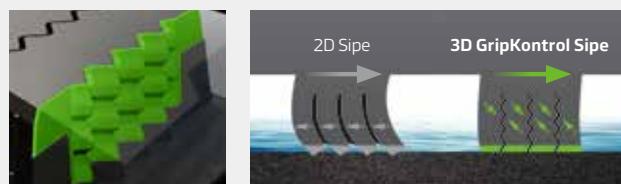

New Compound Enhances both Wet Performance and Tread Life

Optimized compound improves both wet performance and mileage. Incorporating high levels of silica and resin enhances wet/dry grip. Additionally, optimizing silica dispersion in the new material improves tread life.

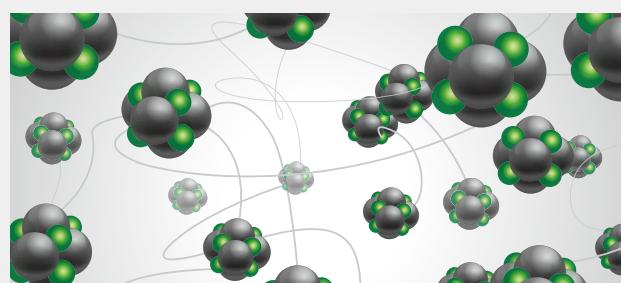

About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	
						psi	lbs								
15	1035947	195/65R15	SL	91H	BSW	5.5-7.0	51	1,356	25	8.2	10.5	832	18.3	720/A/A	3PMST
16	1035948	205/55R16	SL	91H	BSW	5.5-7.5	51	1,356	24.9	8.9	10.5	835	20.7	720/A/A	3PMST
	1035981	205/60R16	SL	92V	BSW	5.5-7.5	51	TBD	25.5	8.6	10.5	TBD	19.9	720/A/A	3PMST
	1036400	205/65R16	SL	95H	BSW	5.5-7.5	51	TBD	26.3	8.5	10.5	TBD	21.0	720/A/A	3PMST
	1035974	215/55R16	XL	97H	BSW	6.0-7.5	50	1,609	25.2	9.2	10.5	824	22.5	720/A/A	3PMST
	1035949	215/60R16	SL	95H	BSW	6.0-7.5	51	1,521	26.1	9.1	10.5	797	22.1	720/A/A	3PMST
	1035976	225/60R16	SL	98H	BSW	6.0-8.0	51	1,653	26.5	9.3	10.5	784	24.5	720/A/A	3PMST
17	1035957	205/50R17	XL	93V	BSW	5.5-7.5	50	1,433	25.0	8.8	10.5	832	20.5	720/A/A	3PMST
	1035953	215/45R17	XL	91V	BSW	7.0-8.0	50	1,356	24.5	8.7	10.5	848	19.7	720/A/A	3PMST
	1035960	215/50R17	XL	95V	BSW	6.0-7.5	50	1,521	25.5	9.6	10.5	814	23.5	720/A/A	3PMST
	1035945	215/55R17	SL	94V	BSW	6.0-7.5	51	1,477	26.2	9.1	10.5	794	21.1	720/A/A	3PMST
	1035982	225/45R17	XL	94V	BSW	7.0-8.5	50	1,477	25.0	9.3	10.5	832	22.6	720/A/A	3PMST
	1035956	225/50R17	XL	98V	BSW	6.0-8.0	50	1,653	25.9	9.7	10.5	802	24.3	720/A/A	3PMST
	1035955	225/55R17	XL	101V	BSW	6.0-8.0	50	1,819	26.7	9.6	10.5	778	25.4	720/A/A	3PMST
	1035958	235/55R17	SL	99V	BSW	6.5-8.5	51	1,709	27.0	10.0	10.5	769	26.7	720/A/A	3PMST
18	1036401	215/55R18	SL	95H	BSW	6.0-7.5	51	TBD	27.1	9.4	10.5	TBD	23.9	720/A/A	3PMST
	1035979	225/45R18	XL	95V	BSW	7.0-8.5	50	1,521	25.7	9.2	10.5	808	23.5	720/A/A	3PMST
	1036402	235/40R18	XL	95V	BSW	8.0-9.5	50	TBD	25.3	9.8	10.0	TBD	23.8	720/A/A	3PMST
	1035965	235/45R18	XL	98V	BSW	7.5-9.0	50	1,653	26.2	9.6	10.5	794	24.7	720/A/A	3PMST
	1035966	235/50R18	SL	97V	BSW	6.5-8.5	51	1,609	27.2	10.0	10.5	765	26.6	720/A/A	3PMST
19	1035969	235/40R19	XL	96V	BSW	8.0-9.5	50	1,565	26.2	9.8	10.5	794	24.6	720/A/A	3PMST

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

HRS Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage, Road Hazard, and 30 Day Free Trial warranties do not apply to HRS Tires.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Weatherflex GT | H755A

Grand Touring All-Weather

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	
						psi	lbs								
16	1036136	215/65R16	SL	98V	BSW	6.0-7.5	51	1,653	26.9	8.8	10.5	771	24.3	720/A/A	3PMF
	1036124	215/70R16	SL	100H	BSW	5.5-7.0	51	1,764	27.7	8.7	10.5	750	24.6	720/A/A	3PMF
17	1036386	215/65R17	SL	99H	BSW	6.0-7.5	51	TBD	27.8	8.9	10.5	TBD	24.8	720/A/A	3PMF
	1036128	225/60R17	SL	99H	BSW	6.0-8.0	51	1,709	27.6	9.4	10.5	754	24.7	720/A/A	3PMF
18	1036117	225/65R17	SL	102H	BSW	6.0-8.0	51	1,874	28.4	9.2	10.5	731	28.1	720/A/A	3PMF
	1036389	235/60R17	SL	102H	BSW	6.5-8.5	51	TBD	27.9	9.8	10.0	TBD	26.9	720/A/A	3PMF
19	1036122	235/65R17	SL	104H	BSW	6.5-8.5	51	1,984	29.0	9.8	10.5	717	29.3	720/A/A	3PMF
	1036125	245/65R17	SL	107H	BSW	7.0-8.5	51	2,149	29.4	9.8	10.5	707	30.1	720/A/A	3PMF
20	1036130	265/70R17	SL	115H	BSW	7.0-9.0	51	2,679	31.5	10.6	10.5	659	36.6	720/A/A	3PMF
	1036132	225/55R18	SL	98V	BSW	6.0-8.0	51	1,653	27.6	9.6	10.5	754	25.5	720/A/A	3PMF
21	1036129	225/60R18	SL	100H	BSW	6.0-8.0	51	1,764	28.5	9.4	10.5	730	26.9	720/A/A	3PMF
	1036121	235/55R18	SL	100V	BSW	6.5-8.5	51	1,764	28.0	9.9	10.5	741	28.1	720/A/A	3PMF
22	1036133	235/60R18	XL	107V	BSW	6.5-8.5	50	2,149	29	9.8	10.5	716	29.6	720/A/A	3PMF
	1036120	235/65R18	SL	106H	BSW	6.5-8.5	51	2,094	29.9	9.5	10.5	695	30.5	720/A/A	3PMF
23	1036118	245/60R18	SL	105H	BSW	7.0-8.5	51	2,039	29.4	10.1	10.5	706	30.0	720/A/A	3PMF
	1036394	255/65R18	SL	111H	BSW	7.0-9.0	51	TBD	30.9	10.4	10.0	TBD	32.5	720/A/A	3PMF
24	1036126	265/60R18	SL	110V	BSW	7.5-9.5	51	2,337	30.3	11	10.5	685	34.4	720/A/A	3PMF
	1036396	265/65R18	SL	114H	BSW	7.5-9.5	51	TBD	31.4	10.9	10.5	TBD	36.3	720/A/A	3PMF
25	1036398	275/65R18	SL	116H	BSW	7.5-9.5	51	TBD	31.9	11.1	11.0	TBD	39.9	720/A/A	3PMF
	1036387	225/55R19	XL	103V	BSW	6.0-8.0	50	TBD	28.7	9.7	10.5	TBD	27.5	720/A/A	3PMF
26	1036388	235/50R19	XL	103V	BSW	6.5-8.5	50	TBD	28.1	10.3	10.5	TBD	27.0	720/A/A	3PMF
	1036134	235/55R19	XL	105V	BSW	6.5-8.5	50	2,039	29	9.8	10.5	715	30.2	720/A/A	3PMF
27	1036123	245/55R19	SL	103V	BSW	7.0-8.5	51	1,929	29.5	10.4	10.5	704	30.3	720/A/A	3PMF
	1036391	255/45R19	XL	104V	BSW	8.0-9.5	50	TBD	27.9	10.4	10.0	TBD	29.4	720/A/A	3PMF
28	1036131	235/55R20	SL	102V	BSW	6.5-8.5	51	1,874	30.0	10.2	10.5	693	29.8	720/A/A	3PMF
	1036390	245/50R20	SL	102V	BSW	7.0-8.5	51	TBD	29.5	10.6	9.5	TBD	29.9	720/A/A	3PMF
29	1036392	255/45R20	XL	105V	BSW	8.0-9.5	50	TBD	28.9	10.4	10.0	TBD	31.3	720/A/A	3PMF
	1036135	255/50R20	XL	109V	BSW	7.0-9.0	50	2,271	29.9	11.1	10.5	693	31.9	720/A/A	3PMF
30	1036393	255/55R20	XL	110V	BSW	7.0-9.0	50	TBD	30.9	10.9	10.0	TBD	34.3	720/A/A	3PMF
	1036395	265/50R20	XL	111V	BSW	7.5-9.5	50	TBD	30.3	11.5	10.5	TBD	34.4	720/A/A	3PMF
31	1036119	275/55R20	SL	113H	BSW	7.5-9.5	51	2,535	31.8	11.6	10.5	654	37.8	720/A/A	3PMF
	1036127	275/60R20	SL	115H	BSW	7.5-9.5	51	2,679	32.8	11.4	10.5	633	39.6	720/A/A	3PMF
32	1036397	275/50R22	SL	111H	BSW	7.5-9.5	51	TBD	32.7	11.8	11.0	TBD	37.7	720/A/A	3PMF
	1036399	285/45R22	XL	114H	BSW	9.0-10.5	50	TBD	31.9	11.5	11.0	TBD	39.2	720/A/A	3PMF

About Hankook

ION
Ventus

Weatherflex

Dynapro

Winter

Vantra





Dynapro

SUV / LT (4X4)

Dynapro evo AS | RA21

Dynapro HPX | RA43

Dynapro HT2 | RH14

Dynapro AT2 Xtreme | RF12

Dynapro XT | RC10

Dynapro MT2 | RT05

About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Product Line-up

The Dynapro Family

**Dynapro
evo AS**

PERFORMANCE
ALL-SEASON

**Dynapro
HPX**

TOURING
ALL-SEASON

**Dynapro
HT2**

HIGHWAY
TERRAIN

NEW

NEW



On-Road ←

**Dynapro
AT2 Xtreme**

ALL-TERRAIN

**Dynapro
XT**

RUGGED
TERRAIN

**Dynapro
MT2**

MUD
TERRAIN



Off-Road

Dynapro evo AS (RA21)

Ultimate Control. Powerful Performance.



Warranty

LIMITED TREADWEAR
WARRANTY

50K

Road-Engineered Premium Performance

Category Leader

Dynapro evo AS

Dry Braking improved 3% Wet Braking improved 6%

* Source : Internal Product Performance Evaluation (Hankook Technoring, 255/45R20)


Double Up Structure

The tire features two reinforced belts with an additional pair layered on top, providing exceptional durability for high-speed performance. This advanced construction minimizes tread deformation and wear, ensuring reliable performance in various driving conditions.




Best Void for Wet Driving

Enhanced drainage performance without compromised directional rigidity is achieved by precisely adjusting the center and intermediate chamfer depths with strategically placed internal tie bars and sipes.

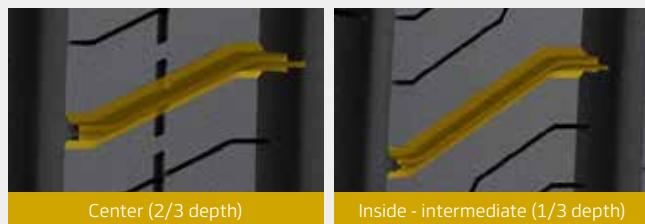


Optimized Groove Design

For a quieter ride, we designed the inner shoulder of the tire with expanded lateral grooves, while the outer shoulder features a closed design. This innovative combination traps resonance noise within the main grooves, to significantly reduce high-frequency noise.

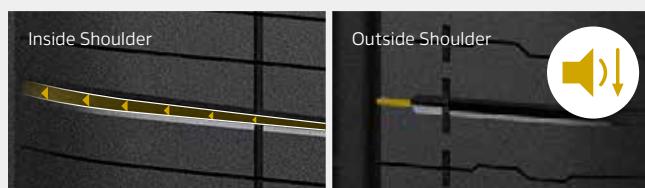


Best Groove for Stiffness

The Wave and InterLocking Band 3D Sipes are designed with increased density and precision to minimize block deformation. With a wave pattern featuring diverse thicknesses and the integration of an Interlocking Band for depth optimization, handling and braking performance have been elevated.

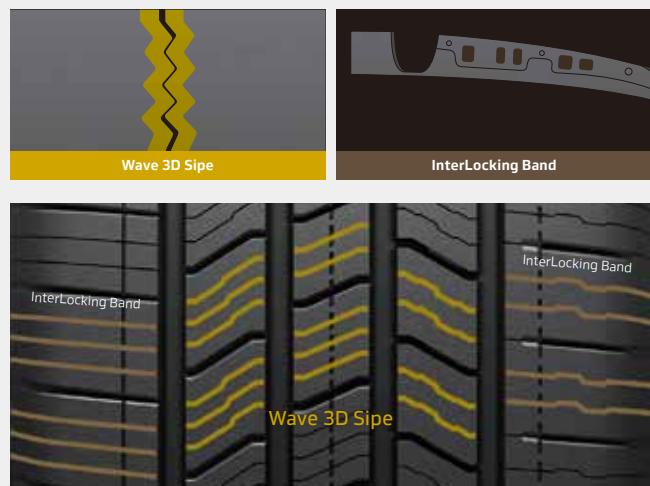


All-Season Compound

The Dynapro Evo AS incorporates a new compound with high silica content and high-performance resins, maximizing braking performance on both dry and wet surfaces. The cold-weather compounds ensure optimum snow-driving performance.

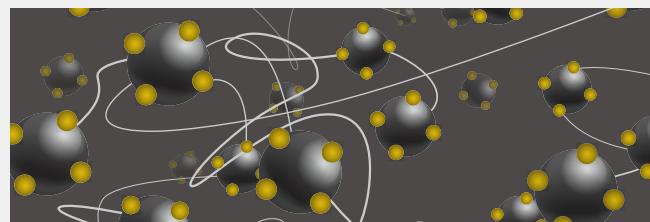

More Mileage

To enhance wear performance, we optimized the contact patch with a square center and round shoulder design. We also removed acute corners from the lateral grooves to reduce uneven contact pressure.

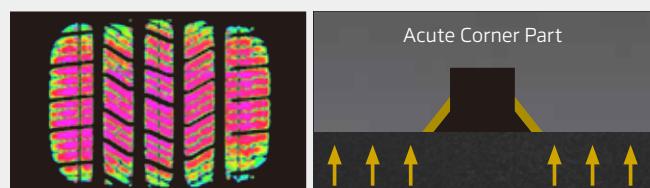

Dynapro HPX (RA43)

Provides the utmost handling and premium comfort for SUV tires



Warranty



Knurling Technology

Knurling technology applied inside the grooves effectively reduces tread pattern noise during road contact by narrowing the air path, without losing the groove's intended features.




3d Gripkontrol Sipes



This helps to provide outstanding grip performance on dry, wet roads and light snow.




New Four-Season High Performance Compound

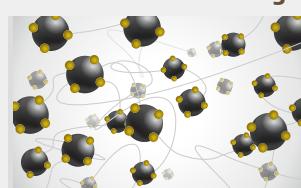


A high concentration of silica was added to enhance the grip force on all surface conditions (wet & dry & snow).

Mileage Test Results



Optimized Multi-Pitch Sequencing

Tire noise can be drastically reduced by optimizing the pitch sequence

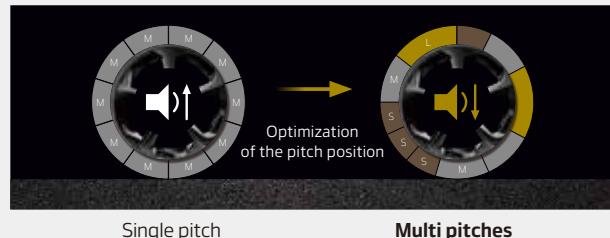

Improved driving stability through pattern stiffness optimization



* Test with Ventus S2 AS X

Optimization of ground shape



Dynapro HT2 (RH14)

Redefined year-round comfort and durability



Warranty



Treadlife

LASTS UP TO 13% LONGER

Altering profiles, patterns and applying a new compound resulted in a 13% increase in mileage compared to Dynapro HT (predecessor).


Optimized Pattern Stiffness

Enhanced block stiffness prevents uneven wear.



Profile Technology

The Dynapro HT2 uses an exclusive flat, square profile designed to enhance wear performance.

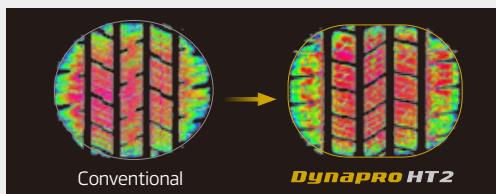

Snow Performance

Boosted Siping Count

More sipes enhance grip and control over snow.



SNOW Acc.
Improved by **6%**

SNOW Braking
Improved by **9%**

SNOW Handling
Improved by **7%**

(compared to its predecessor)



Optimized Main Groove Design

Tread ratio optimization enhances water evacuation efficiency to prevent hydroplaning.



Wet Handling
Improved by **7%**




WET Braking
Improved by **6%**

(compared to its predecessor)



Quiet Performance ↓ 2dB(A) Quieter

Noise-reducing tread pattern delivers a 2dB(A) quieter ride compared to its predecessor.

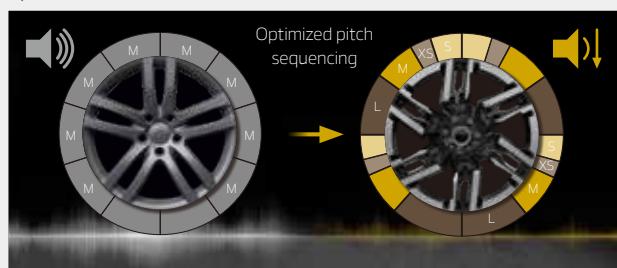

Dynapro AT2 xtreme (RF12)

Tough in all terrains



Test & Design award



reddot award 2022
winner

Warranty




Formulated Compound

With our next generation compound technology, the Dynapro AT2 Xtreme provides increased longevity and enhanced cut/chip resistance.




Multi-directional grooves and sipes

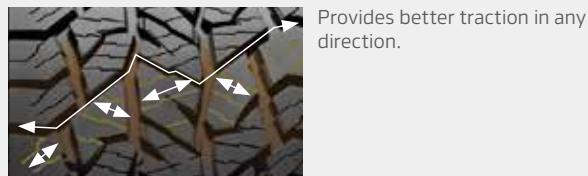

Biting block edges





Aggressive shoulders and sidewall

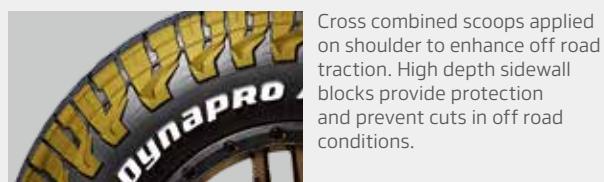

Tie-bars



Staged block edges

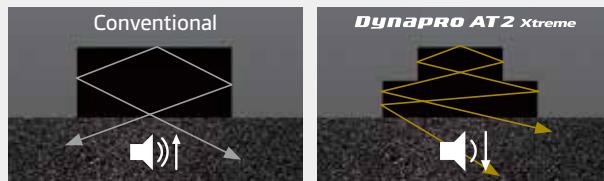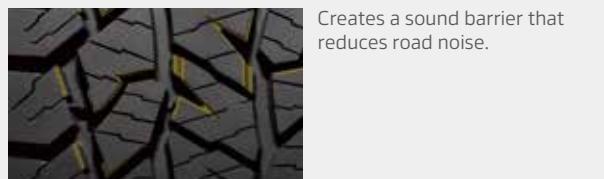

Dynapro XT (RC10)

The new specialty for the all-terrain tire



Sawtoothed sidewall



The aggressively designed sidewall enhances off-road traction and provides protection in tough terrains.


Polygonal blocks




The center blocks and shoulder blocks with high rigidity provide improved off-road traction and handling.

Chamfered edges

The beveled edges minimise impact to reduce road noise.



Shoulder block cushions

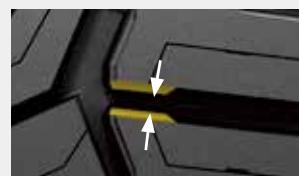

Cushions between the shoulder blocks relieve impact and absorb noise.

Lateral grooves



V shaped lateral grooves bite the surface for additional off-road grip.

Test & Design award



Warranty



Dynapro MT2 (RT05)

Toughest wild-terrain off-road traction



Test & Design award



reddot winner 2020

Terrain wide tread design



By our engineering 3D simulation, optimised the pattern design. Provide ultimate off-road traction while keeping on-road and quietness.

Mud and rock defender



Stone ejectors protect the tread grooves against stone drilling and puncturing. Also shed the mud and stones from the tread grooves to maximise the grip.



Conventional



Dynapro MT2

Sidewall bump protector



Series of bumper protector is designed to protect the sidewall area. Objects are deflected away to protect sidewall against penetration.

Connected shoulder tread



By connecting the tread and shoulder part, power through mud and soil condition and delivers improved high off-road traction.

About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	
						psi	lbs							
19	1034949	235/55ZR19	XL	105W	BSW	6.5-8.5	50	2,039	29.1	10.1	10.0	713	31.6	540/AA/A
	1034950	265/50ZR19	XL	110W	BSW	7.5-9.5	50	2,337	29.3	11.4	10.0	709	33.6	540/AA/A
20	1034975	245/45ZR20	XL	103Y	BSW	7.5-9.0	50	1,929	28.5	9.6	10.0	730	28.6	540/AA/A
	1034966	265/45ZR20	XL	108Y	BSW	8.5-10.0	50	2,205	29.3	10.4	10.0	709	32.1	540/AA/A
20	1034972	275/40ZR20	XL	106Y	BSW	9.0-11.0	50	2,094	28.6	10.9	10.0	727	30.6	540/AA/A
	1034952	295/40ZR20	XL	110Y	BSW	10.0-11.5	50	2,337	29.1	11.7	10.5	713	34.1	540/AA/A
21	1034946	265/45ZR21	XL	108Y	BSW	8.5-10.0	50	2,205	30.1	10.4	10.0	689	33.3	540/AA/A
	1034945	275/40ZR21	XL	107Y	BSW	9.0-11.0	50	2,149	29.5	10.9	10.0	705	30.9	540/AA/A
21	1034955	275/45ZR21	XL	110Y	BSW	8.5-10.5	50	2,337	30.6	11.1	10.0	679	35.6	540/AA/A
	1034948	285/40ZR21	XL	109Y	BSW	9.5-11.0	50	2,271	29.8	11.3	10.0	698	34.7	540/AA/A
21	1034959	315/35ZR21	XL	111Y	BSW	10.5-12.5	50	2,403	29.5	12.5	10.0	705	36.2	540/AA/A
	1034958	315/40ZR21	XL	115Y	BSW	10.5-12.5	50	2,679	30.7	12.5	10.5	676	39.8	540/AA/A

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	OE
						psi	lbs							
16	1030847	215/70R16	SL	100H	BSW	5.5-7.0	51	1,764	27.7	8.7	10.5	749	25.6	680/A/A
	1034416	215/60R17	SL	96H	BSW	6.0-7.5	51	1,565	27.1	9.1	10.5	767	25.3	680/A/A
17	1030848	225/60R17	SL	99H	BSW	6.0-8.0	51	1,709	27.5	9.3	10.5	754	26.1	680/A/A
	1030849	225/65R17	SL	102H	BSW	6.0-8.0	51	1,874	28.4	9.3	10.5	732	27.6	680/A/A
17	1030850	235/65R17	XL	108V	BSW	6.5-8.5	50	2,205	29.0	9.5	10.5	717	29.7	680/A/A
	1030851	245/65R17	SL	107H	BSW	7.0-8.5	51	2,149	29.4	9.8	10.5	707	29.6	680/A/A
18	1034418	215/50R18	SL	92V	BSW	6.0-7.5	51	1,389	26.3	9.4	10.0	791	23.6	680/A/A
	1030852	225/60R18	SL	100H	BSW	6.0-8.0	51	1,764	28.5	9.4	10.5	729	27.7	680/A/A
18	1030853	235/50R18	SL	97V	BSW	6.5-8.5	51	1,609	27.0	10.1	10.0	769	26.0	680/A/A
	1030854	235/55R18	SL	100V	BSW	6.5-8.5	51	1,764	28.0	9.8	10.0	741	27.5	680/A/A
18	1030855	235/60R18	XL	107V	BSW	6.5-8.5	50	2,149	29.2	10.0	10.5	712	31.1	680/A/A
	1030856	235/65R18	SL	106V	BSW	6.5-8.5	51	2,094	29.9	9.5	10.5	694	30.4	680/A/A
18	1030857	245/60R18	SL	105H	BSW	7.0-8.5	51	2,039	29.4	10.1	10.5	705	30.5	680/A/A
	1030858	255/55R18	XL	109V	BSW	7.0-9.0	50	2,271	28.9	10.7	10.0	719	31.1	680/A/A
18	1034417	255/60R18	XL	112V	BSW	7.0-9.0	50	2,469	29.9	10.6	10.5	695	35.3	680/A/A
	1030859	255/65R18	SL	111H	BSW	7.0-9.0	51	2,403	30.9	10.3	10.5	672	32.9	680/A/A
18	1030860	265/60R18	SL	110V	BSW	7.5-9.5	51	2,337	30.4	10.9	10.5	682	33.5	680/A/A
	1030861	225/55R19	SL	99V	BSW	6.0-8.0	51	1,709	28.5	9.4	10.0	728	27.5	680/A/A
19	1030862	235/45R19	SL	95V	BSW	7.5-9.0	51	1,521	27.2	9.6	10.0	764	25.9	680/A/A
	1030863	235/50R19	SL	99V	BSW	6.5-8.5	51	1,709	28.0	10.1	10.0	741	27.2	680/A/A
19	1030864	235/55R19	SL	101V	BSW	6.5-8.5	51	1,819	29.1	9.8	10.0	714	30.9	680/A/A
	1030845	245/50R19	XL	105H	BSW	7.0-8.5	50	2,039	28.7	10.4	9.0	725	29.3	680/A/A
19	1030865	245/55R19	SL	103H	BSW	7.0-8.5	51	1,929	29.5	10.4	10.0	704	29.6	680/A/A
	1030866	255/50R19	XL	107H	BSW	7.0-9.0	50	2,149	28.8	10.8	10.0	720	30.4	680/A/A
19	1030867	255/55R19	XL	111V	BSW	7.0-9.0	50	2,403	29.9	10.7	10.0	695	32.5	680/A/A
	1030868	255/60R19	SL	109H	BSW	7.0-9.0	51	2,271	30.9	10.6	10.5	672	32.9	680/A/A
19	1030869	265/50R19	XL	110V	BSW	7.5-9.5	50	2,337	29.3	11.4	10.0	709	32.8	680/A/A
	1030870	275/55R19	XL	115V	BSW	7.5-9.5	50	2,679	30.8	11.4	10.0	675	37.0	680/A/A
20	1030871	235/55R20	SL	102V	BSW	6.5-8.5	51	1,874	29.9	9.8	10.0	695	29.8	680/A/A
	1030872	245/45R20	SL	99V	BSW	7.5-9.0	51	1,709	28.5	9.9	10.0	729	27.8	680/A/A
20	1030873	245/50R20	SL	102V	BSW	7.0-8.5	51	1,874	29.4	10.5	10.0	706	29.7	680/A/A

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	OE
						psi	lbs							
20	1030874	255/45R20	SL	101H	BSW	8.0-9.5	51	1,819	28.8	10.4	10.0	720	29.7	680/A/A
	1030875	255/50R20	XL	109V	BSW	7.0-9.0	50	2,271	29.8	10.8	10.0	697	31.5	680/A/A
	1030876	255/55R20	XL	110V	BSW	7.0-9.0	50	2,337	30.9	10.7	10.0	673	34.0	680/A/A
	1030877	265/45R20	XL	108V	BSW	8.5-10.0	50	2,205	29.2	10.8	10.0	712	32.3	680/A/A
	1030878	265/50R20	XL	111V	BSW	7.5-9.5	50	2,403	30.3	11.4	10.0	686	34.4	680/A/A
	1030879	275/45R20	XL	110V	BSW	8.5-10.5	50	2,337	29.6	11.1	10.0	703	34.1	680/A/A
	1030880	275/50R20	SL	109H	BSW	7.5-9.5	51	2,271	30.7	11.7	10.0	676	33.9	680/A/A
	1030881	275/55R20	SL	113V	BSW	7.5-9.5	51	2,535	31.8	11.4	10.0	654	37.8	680/A/A
	1030882	275/60R20	SL	115H	BSW	7.5-9.5	51	2,679	32.9	11.3	10.5	631	38.2	680/A/A
21	1035232	245/45R21	XL	104W	BSW	7.5-9.0	50	1,984	29.4	9.9	10.0	706	30.5	680/A/A
	1030883	275/45R21	XL	110H	BSW	8.5-10.5	50	2,337	30.5	11.1	10.0	680	35.1	680/A/A
22	1034097	275/45R22	XL	112V	BSW	8.5-10.5	50	2,469	31.6	11.1	10.0	658	37.2	680/A/A
	1035360	275/50R22	SL	111H	BSW	7.5-9.5	51	2,403	32.9	11.7	10.0	631	37.6	680/A/A
	1030318	285/45R22	XL	114H	BSW	9.0-10.5	50	2,601	31.9	11.5	10.5	651	39.0	680/A/A

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	OE	Tech
						psi	lbs								
16	1021744	255/70R16	SL	111T	BSW	6.5-8.5	51	2,403	29.9	9.8	10.0	695	30.4	500/B/A	Ford Ranger XL ('19-'23)
	1015220	P245/75R16	SL	109S	BSW	6.5-8.0	51	2,271	30.4	9.6	10.5	682	31.4	500/B/B	Toyota Tacoma ('15-'23)
	1017446	P265/70R16	SL	111T	BSW	7.0-9.0	51	2,403	30.6	10.8	10.0	680	34.2	700/B/A	Nissan Frontier ('21-'27)
17	1014070	225/65R17	SL	102H	BSW	6.0-8.0	51	1,874	28.5	9.3	10.0	708	26.8	380/A/A	Nissan Rogue ('13-'20)
	1023527	225/65R17	SL	102H	BSW	6.0-8.0	51	1,874	28.4	9.3	10.0	731	27.3	380/A/A	Nissan Rogue ('17-'20)
18	1024246	265/60R18	SL	110T	BSW	7.5-9.5	51	2,337	30.4	10.7	10.0	682	34.3	600/A/B	Ford F-150 ('20-'26)
	1016508	275/65R18	SL	116H	BSW	7.5-9.5	51	2,756	32.1	11.0	11.0	647	39.5	700/B/A	Lincoln Navigator ('17-'21), Ford Expedition ('17-'21)
	1017448	P265/60R18	SL	109T	BSW	7.5-9.5	51	2,271	30.5	11.3	12.0	680	34.5	700/A/B	Nissan Frontier ('15-'21)
20	1013171	275/55R20	SL	113T	BSW	7.5-9.5	51	2,535	32.0	11.5	11.0	649	40.7	700/A/B	Lincoln Navigator ('14-'17), Ford Expedition ('14-'17)
	1013844	P275/60R20	SL	114T	BSW	7.5-9.5	51	2,601	33.0	11.7	12.5	629	42.0	700/A/B	Ram 1500 ('16-'24)
22	1016510	285/45R22	XL	114H	BSW	9.0-10.5	50	2,601	32.3	11.4	11.0	643	39.5	700/A/A	Lincoln Navigator ('17-'21), Ford Expedition ('17-'21)

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	OE	Tech
						psi	lbs							
15	2002008	LT235/75R15	C	104/101Q	OWL	6.0-8.0	50	1,985 / 1,820	28.8	9.2	14.5	726	37.1	
16	2001864	195/75R16C	D	107/105R	BSW	5.0-6.0	70	2,150 / 2,040	27.5	7.9	12.5	761	32.6	Ford Transit ('14-'19)
	2020826	205/75R16C	E	113/111R	BSW	5.5-6.5	76	2,535 / 2,403	27.9	8.2	11.5	750	34.2	Ford Transit ('19-'28)
	2001863	235/65R16C	E	121/119R	BSW	6.5-7.5	85	3,195 / 3,000	28.0	9.4	12.5	746	40.4	Ford Transit ('14-'19)
	2001831	LT225/75R16	E	115/112S	BSW	6.0-7.5	80	2,680 / 2,470	29.2	8.8	14.5	715	39.9	Ford E-Series ('19-'27)
	2021454	LT245/75R16	E	120/116R	BSW	6.5-8.0	80	3,042 / 2,778	30.3	9.9	13.5	689	41.3	Ford E-Series ('21-'27)
17	2021485	LT245/70R17	E	119/116S	BSW	6.5-8.0	80	3,000 / 2,755	30.5	9.8	14.0	686	40.7	Rivian Electric Delivery Van ('21-'25) EV

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

*Road Hazard Warranty and 30 Day Free Trial does not apply to LT-Metric tires

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	
						psi	lbs							
15	1034035	235/75R15	XL	109T	BSW	6.0-8.0	50	2,271	28.8	9.1	13.0	721	30.4	740/A/B
16	1034044	215/70R16	SL	100T	BSW	5.5-7.0	51	1,764	27.8	8.6	12.0	747	26.9	740/A/B
	1034042	225/70R16	SL	103T	BSW	6.0-7.5	51	1,929	28.4	8.9	12.5	732	28.0	740/A/B
	1034034	225/75R16	SL	104T	BSW	6.0-7.5	51	1,984	29.3	8.7	12.5	710	29.2	740/A/B
	1034048	235/70R16	XL	109T	BSW	6.0-8.0	50	2,271	28.9	9.3	12.5	718	30.5	740/A/B
	1034038	235/75R16	XL	112T	BSW	6.0-8.0	50	2,469	29.8	9.1	12.5	697	32.2	740/A/B
	1034045	245/70R16	SL	107T	BSW	6.5-8.0	51	2,149	29.5	9.6	12.5	705	31.5	740/A/B
	1034040	245/75R16	SL	111T	BSW	6.5-8.0	51	2,403	30.4	9.5	12.5	682	33.2	740/A/B
	1034047	255/70R16	SL	111T	BSW	6.5-8.5	51	2,403	30.0	10.2	12.5	692	34.6	740/A/B
	1034051	265/70R16	SL	112T	BSW	7.0-9.0	51	2,469	30.6	10.5	13.0	680	35.2	740/A/B
	1034037	265/75R16	SL	116T	BSW	7.0-9.0	51	2,756	31.6	10.3	13.0	657	37.9	740/A/B
17	1034057	225/65R17	SL	102H	BSW	6.0-8.0	51	1,874	28.4	9.3	12	731	29.4	740/A/B
	1034058	235/60R17	SL	102H	BSW	6.5-8.5	51	1,874	28.1	9.8	12.0	739	29.6	740/A/B
	1034033	235/75R17	SL	109T	BSW	6.0-8.0	51	2,271	30.9	9.4	13.0	674	32.0	740/A/B
	1034054	245/65R17	SL	107T	BSW	7.0-8.5	51	2,149	29.5	10.0	12.0	704	31.8	740/A/B
	1034050	245/70R17	SL	110T	BSW	6.5-8.0	51	2,337	30.5	9.6	12.5	681	34.4	740/A/B
	1034032	245/75R17	SL	112T	BSW	6.5-8.0	51	2,469	31.6	9.9	12.5	660	35.4	740/A/B
	1034052	255/65R17	SL	110T	BSW	7.0-9.0	51	2,337	30.0	10.5	12.5	691	34.7	740/A/B
	1034046	255/70R17	SL	112T	BSW	6.5-8.5	51	2,469	31.1	10.3	13.0	669	35.6	740/A/B
	1034055	265/65R17	SL	112T	BSW	7.0-9.0	51	2,469	30.5	10.9	12.5	681	37.3	740/A/B
	1034049	265/70R17	SL	115T	BSW	7.0-9.0	51	2,679	31.7	10.7	13.0	655	39.3	740/A/B
18	1034395	245/75R18	SL	112T	BSW	6.5-8.0	51	2,469	32.5	9.8	12.5	640	36.8	740/A/B
	1034041	255/70R18	SL	113T	BSW	6.5-8.5	51	2,535	32.1	10.4	13.0	649	37.2	740/A/B
	1034060	265/60R18	SL	110T	BSW	7.5-9.5	51	2,337	30.4	11.1	12.5	683	36.3	740/A/B
	1034053	265/65R18	SL	114T	BSW	7.5-9.5	51	2,601	31.5	10.9	13.0	659	38.8	740/A/B
	1034043	265/70R18	SL	116T	BSW	7.0-9.0	51	2,756	32.7	10.7	13.0	638	39.3	740/A/B
	1034056	275/65R18	SL	116H	BSW	7.5-9.5	51	2,756	32.1	11.1	12.5	648	40.2	740/A/B
20	1034061	275/55R20	SL	113H	BSW	7.5-9.5	51	2,535	31.8	11.6	12.0	654	40.1	740/A/B
	1034059	275/60R20	SL	115T	BSW	7.5-9.5	51	2,679	33	11.4	12.5	630	41.8	740/A/B
22	1034062	275/50R22	SL	111T	BSW	7.5-9.5	51	2,403	32.7	11.8	11.5	636	41.6	740/A/B
	1034063	285/45R22	XL	114H	BSW	9.0-10.5	50	2,601	32.0	11.5	11.5	650	41.3	740/A/B

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

* Road Hazard Warranty and 30 Day Free Trial does not apply to LT-Metric tires

Dynapro HT2 | RH14 LT-Metric
Premium Highway All-Season

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	
						psi	lbs						
15	2021996	185/60R15C	C	94/92T	BSW	5.5-6.0	54	1,475/1,390	23.7	8.0	12.5	884	22.4
16	2021994	195/75R16C	D	107/105R	BSW	5.0-6.0	69	2,150/2,040	27.4	7.7	12.5	764	28.5
	2021993	205/75R16C	E	113/111R	BSW	5.5-6.5	76	2,535/2,405	28.0	7.9	12.5	746	31.8
	2022150	225/75R16C	E	121/120R	BSW	6.0-7.5	83	3,195/3,085	29.2	8.6	12.5	717	36.1
	2021995	235/65R16C	E	121/119R	BSW	6.5-7.5	83	3,195/3,000	28.0	9.6	12.5	747	35.5
	2022149	285/65R16C	E	131R	BSW	8.0-10.0	83	4,300/4,300	30.3	11.5	12.5	689	53.0
	2021992	LT215/85R16	E	115/112R	BSW	5.5-7.0	80	2,680/2,470	30.3	8.1	14.5	691	38.8
	2021990	LT225/75R16	E	115/112S	BSW	6.0-7.5	80	2,680/2,470	29.2	8.6	14.5	717	38.1
	2021907	LT235/85R16	E	120/116R	BSW	6.0-7.5	80	3,042/2,778	31.6	8.7	14.5	661	42.8
	2021906	LT245/75R16	E	120/116S	BSW	6.5-8.0	80	3,042/2,778	30.4	9.5	14.5	689	41.9
	2021901	LT265/75R16	E	123/120S	BSW	7.0-9.0	80	3,415/3,085	31.5	10.0	14.5	663	46.7
17	2021991	LT235/80R17	E	120/117R	BSW	6.0-8.0	80	3,085/2,835	31.7	8.9	14.5	660	43.1
	2021902	LT245/70R17	E	119/116S	BSW	6.5-8.0	80	3,000/2,755	30.5	9.6	14.5	686	42.9
	2021989	LT245/75R17	E	121/118S	BSW	6.5-8.0	80	3,195/2,910	31.4	9.5	14.5	666	44.2
	2022014	LT265/70R17	E	123/120S	BSW	7.0-9.0	80	3,415/3,085	31.6	10.6	14.5	662	47.9
	2022072	LT285/70R17	E	126/123S	BSW	7.5-9.5	80	3,750/3,415	32.7	11.3	14.5	640	61.9
18	2021988	LT265/70R18	E	124/121S	BSW	7.0-9.0	80	3,525/3,195	32.5	10.4	14.5	642	50.1
	2022070	LT275/65R18	E	123/120S	BSW	8.0-9.5	80	3,415/3,085	32.0	11.2	14.5	653	61.0
	2022068	LT275/70R18	E	125/122S	BSW	7.0-9.0	80	3,640/3,305	33.1	10.8	14.5	632	61.8
	2022069	LT285/65R18	E	125/122S	BSW	8.5-10.0	80	3,640/3,305	32.5	11.6	14.5	644	61.5
	2022071	LT295/70R18	E	129/126R	BSW	7.5-10.0	80	4,080/3,750	34.2	11.3	14.5	611	67.1
20	2021895	LT265/60R20	E	121/118R	BSW	8.0-9.5	80	3,195/2,910	32.4	10.9	14.5	645	55.4
	2021986	LT275/65R20	E	126/123S	BSW	8.0-9.5	80	3,750/3,415	34.0	11.2	14.5	614	63.0
	2021985	LT285/60R20	E	125/122R	BSW	8.5-10.0	80	3,640/3,305	33.4	11.6	14.5	626	63.5

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

*Road Hazard Warranty and 30 Day Free Trial does not apply to LT-Metric tires

About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	
						psi	lbs								
15	1029781	235/75R15	XL	109T	RWL	6.0-8.0	50	2,271	28.8	9.0	12.5	722	32.1	660/A/B	3PMSF
16	1029808	215/70R16	SL	100T	RWL	5.5-7.0	51	1,764	27.8	8.6	12.5	747	28.1	660/A/B	3PMSF
	1029806	225/70R16	SL	103T	RWL	6.0-7.5	51	1,929	28.3	8.9	12.5	733	29.7	660/A/B	3PMSF
	1029798	225/75R16	XL	108T	RWL	6.0-7.5	50	2,205	29.2	8.7	12.5	711	32.0	660/A/B	3PMSF
	1029794	235/70R16	XL	109T	RWL	6.0-8.0	50	2,271	28.9	9.3	12.5	718	32.5	660/A/B	3PMSF
	1029795	235/75R16	XL	112T	RWL	6.0-8.0	50	2,469	29.9	9.1	12.5	694	34.4	660/A/B	3PMSF
	1029796	245/70R16	XL	111T	RWL	6.5-8.0	50	2,403	29.5	9.7	12.5	704	35.4	660/A/B	3PMSF
	1029783	245/75R16	SL	111T	RWL	6.5-8.0	51	2,403	30.4	9.6	12.5	682	36.6	660/A/B	3PMSF
	1029797	255/70R16	SL	111T	RWL	6.5-8.5	51	2,403	30.0	10.2	12.5	691	37.3	660/A/B	3PMSF
	1029782	265/70R16	SL	112T	RWL	7.0-9.0	51	2,469	30.6	10.6	12.5	678	38.5	660/A/B	3PMSF
	1029793	265/75R16	SL	116T	RWL	7.0-9.0	51	2,756	31.5	10.4	12.5	659	38.6	660/A/B	3PMSF
17	1031251	215/65R17	SL	99T	BSW	6.0-7.5	51	1,709	28.1	8.6	12.5	740	28.0	660/A/B	3PMSF
	1035296	225/55R17	XL	101V	BSW	6.0-8.0	50	1,819	26.7	9.6	12.0	777	28.0	660/A/B	3PMSF
	1031253	225/60R17	SL	99H	BSW	6.0-8.0	51	1,708	27.6	9.3	12.5	751	28.4	660/A/B	3PMSF
	1035294	225/65R17	XL	106H	BSW	6.0-8.0	50	2,094	28.4	9.3	12.5	730	29.9	660/A/B	3PMSF
	1035288	235/55R17	XL	103V	BSW	6.5-8.5	50	1,929	27.1	10.1	12.0	765	29.3	660/A/B	3PMSF
	1029800	235/65R17	SL	104T	RWL	6.5-8.5	51	1,984	29.1	9.6	12.5	714	32.4	660/A/B	3PMSF
	1029799	235/75R17	SL	109T	RWL	6.0-8.0	51	2,271	30.8	9.2	12.5	674	34.4	660/A/B	3PMSF
	1029784	245/65R17	XL	111T	RWL	7.0-8.5	50	2,403	29.6	10.0	12.5	702	35.3	660/A/B	3PMSF
	1029786	245/70R17	SL	110T	RWL	6.5-8.0	51	2,337	30.5	9.7	12.5	681	37.0	660/A/B	3PMSF
	1029804	245/75R17	SL	112T	BSW	6.5-8.0	51	2,469	31.4	9.6	12.5	661	37.9	660/A/B	3PMSF
	1029801	255/65R17	SL	110T	RWL	7.0-9.0	51	2,337	30.0	10.4	12.5	691	37.0	660/A/B	3PMSF
	1029785	255/70R17	SL	112T	RWL	6.5-8.5	51	2,469	31.1	10.2	12.5	669	38.6	660/A/B	3PMSF
	1029791	255/75R17	SL	115T	BSW	6.5-8.5	51	2,679	32.0	10.0	12.5	650	39.0	660/A/B	3PMSF
	1029787	265/65R17	SL	112T	RWL	7.0-9.0	51	2,469	30.5	10.9	12.5	681	39.3	660/A/B	3PMSF
	1029842	265/70R17	SL	115T	RWL	7.0-9.0	51	2,679	31.6	10.6	12.5	657	39.6	660/A/B	3PMSF
	1036137	285/70R17	SL	116T	BSW	7.5-9.5	51	2,756	32.7	11.2	13.5	635	43.7	660/A/B	3PMSF

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

* Road Hazard Warranty does not apply to LT-Metric tires

Dynapro AT2 Xtreme | RF12

Premium All-Terrain

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	UTQG	Tech	
						psi	lbs								
18	1035298	225/55R18	SL	98V	BSW	6.0-8.0	51	1,653	27.7	9.6	12.0	749	27.7	660/A/B	3PMFS
	1035297	225/60R18	XL	104H	BSW	6.0-8.0	50	1,984	28.6	9.4	12.5	727	29.9	660/A/B	3PMFS
	1035289	235/55R18	SL	100V	BSW	6.5-8.5	51	1,764	28.1	10.1	12.0	739	30.9	660/A/B	3PMFS
	1029802	235/60R18	SL	103T	BSW	6.5-8.5	51	1,929	29.1	9.9	12.5	715	32.8	660/A/B	3PMFS
	1031087	235/65R18	XL	110H	RWL	6.5-8.5	50	2,337	30.0	9.5	12.5	691	35.1	660/A/B	3PMFS
	1035295	245/60R18	XL	109H	BSW	7.0-8.5	50	2,271	29.5	10.1	12.5	703	34.6	660/A/B	3PMFS
	1035301	255/55R18	XL	109V	BSW	7.0-9.0	50	2,271	29.0	10.9	12.0	716	34.4	660/A/B	3PMFS
	1029792	255/60R18	SL	108T	BSW	7.0-9.0	51	2,205	30.0	10.8	12.5	693	35.8	660/A/B	3PMFS
	1035291	255/65R18	SL	111H	BSW	7.0-9.0	51	2,403	31.1	10.5	12.5	669	36.8	660/A/B	3PMFS
	1029780	255/70R18	SL	113T	BSW	6.5-8.5	51	2,535	32.0	10.2	12.5	648	39.4	660/A/B	3PMFS
	1029779	265/60R18	XL	114T	BSW	7.5-9.5	50	2,601	30.4	11.0	12.5	682	38.9	660/A/B	3PMFS
	1029959	265/65R18	SL	114T	BSW	7.5-9.5	51	2,601	31.5	10.9	12.5	660	40.1	660/A/B	3PMFS
	1031247	265/70R18	SL	116T	BSW	7.0-9.0	51	2,756	32.6	10.6	12.5	638	41.3	660/A/B	3PMFS
	1029958	275/65R18	SL	116T	BSW	7.5-9.5	51	2,756	32.1	11.1	12.5	647	41.5	660/A/B	3PMFS
19	1035292	235/55R19	XL	105V	BSW	6.5-8.5	50	2,039	29.1	10.1	12.0	713	32.0	660/A/B	3PMFS
20	1035299	245/50R20	SL	102V	BSW	7.0-8.5	51	1,874	29.5	10.6	11.5	704	32.8	660/A/B	3PMFS
	1035290	245/60R20	XL	111H	BSW	7.0-8.5	50	2,403	31.5	10.1	12.5	659	37.6	660/A/B	3PMFS
	1034675	255/50R20	XL	109H	BSW	7.0-9.0	50	2,271	30.0	11.1	12.5	691	37.4	660/A/B	3PMFS
	1035300	255/55R20	XL	110V	BSW	7.0-9.0	50	2,337	31.0	10.9	12.0	670	37.4	660/A/B	3PMFS
	1031249	265/50R20	XL	111T	BSW	7.5-9.5	50	2,403	30.5	11.4	12.5	682	40.3	660/A/B	3PMFS
	1035293	265/60R20	SL	112H	BSW	7.5-9.5	51	2,469	32.5	11.1	13.0	640	40.7	660/A/B	3PMFS
	1031250	275/55R20	SL	113T	BSW	7.5-9.5	51	2,535	31.9	11.5	12.5	652	41.9	660/A/B	3PMFS
	1029777	275/60R20	SL	115T	BSW	7.5-9.5	51	2,679	32.9	11.4	12.5	631	43.9	660/A/B	3PMFS
	1029803	305/50R20	XL	120T	BSW	8.5-11.0	50	3,086	32.0	12.8	12.5	650	48.4	660/A/B	3PMFS
22	1035361	275/50R22	SL	111T	BSW	7.5-9.5	51	2,403	32.7	11.8	12.0	635	43.5	660/A/B	3PMFS
	1029960	285/45R22	SL	110T	BSW	9.0-10.5	51	2,337	32.0	11.5	12.5	650	40.3	660/A/B	3PMFS
	1035738	285/45R22	XL	114H	BSW	9.0-10.5	50	2,601	32.0	11.5	12.5	650	41.7	660/A/B	3PMFS
	1029778	305/45R22	XL	118T	BSW	9.5-11.5	50	2,910	32.7	12.1	12.5	635	46.1	660/A/B	3PMFS

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

*Road Hazard Warranty does not apply to LT-Metric tires

About Hankook

ION

Ventus

Kinergy

Weatherflex

Winter

Vantra

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	Tech	
						psi	lbs							
15	2021652	LT215/75R15	C	100/97S	RWL	5.5-7.0	50	1,765/1,610	27.6	8.5	14.5	758	33.6	3PMSF
	2021643	LT235/75R15	C	104/101S	RWL	6.0-8.0	50	1,985/1,820	28.8	9.1	15.5	726	37.6	3PMSF
	2021644	30X9.50R15LT	C	104S	RWL	6.0-8.0	50	1,985/-	29.5	9.1	15.5	708	38.1	3PMSF
	2021629	31X10.50R15LT	C	109S	RWL	7.0-9.0	50	2,270/-	30.5	9.9	15.5	686	42.5	3PMSF
	2021822	32X11.50R15LT	C	113S	RWL	6.5-8.5	50	2,535/-	31.5	10.4	15.5	663	51.0	3PMSF
	2021654	33X12.50R15LT	C	108S	RWL	8.0-10.5	35	2,205/-	32.6	11.7	15.5	641	57.5	3PMSF
16	2021645	LT215/85R16	E	115/112S	RWL	5.5-7.0	80	2,680/2,470	30.3	8.2	15.0	690	40.0	3PMSF
	2021626	LT225/75R16	E	115/112S	BSW	6.0-7.0	80	2,680/2,470	29.2	8.7	15.0	716	39.4	3PMSF
	2021671	LT235/85R16	E	120/116S	BSW	6.0-7.5	80	3,042/2,778	31.6	8.6	16.0	661	44.3	3PMSF
	2021630	LT245/75R16	E	120/116S	RWL	6.5-8.0	80	3,042/2,778	30.4	9.5	15.0	688	44.3	3PMSF
	2021653	LT265/70R16	D	117/114S	RWL	7.0-9.0	65	2,835/2,600	30.6	10.4	15.5	684	46.5	3PMSF
	2021669	LT265/75R16	E	123/120S	BSW	7.0-8.0	80	3,415/3,085	31.7	9.9	15.5	660	47.4	3PMSF
	2021639	LT285/75R16	E	126/123S	RWL	7.5-9.0	80	3,750/3,415	32.8	10.7	15.5	637	59.8	3PMSF
	2021659	LT305/70R16	E	124/121S	RWL	8.0-10.0	65	3,525/3,195	32.8	11.9	15.5	637	62.7	3PMSF
	2021660	LT315/75R16	D	121/118S	RWL	8.0-10.5	50	3,195/2,910	34.6	11.7	15.5	605	65.5	3PMSF
	2021812	LT225/65R17	D	107/103S	BSW	6.0-8.0	65	2,150/1,930	28.4	9.0	15.0	735	38.4	3PMSF
17	2021651	LT225/75R17	E	116/113S	BSW	6.0-7.5	80	2,755/2,535	30.2	8.4	15.0	692	41.5	3PMSF
	2021670	LT235/80R17	E	120/117S	BSW	6.0-7.5	80	3,085/2,835	31.7	8.8	16.0	659	44.3	3PMSF
	2021805	LT245/65R17	D	111/108S	RWL	7.0-8.5	65	2,405/2,205	29.4	9.8	16.0	710	43.9	3PMSF
	2021633	LT245/70R17	E	119/116S	RWL	6.5-8.0	80	3,000/2,755	30.5	9.6	15.5	685	45.4	3PMSF
	2021632	LT245/75R17	E	121/118S	RWL	6.5-7.5	80	3,195/2,910	31.6	9.5	15.0	662	45.6	3PMSF
	2021813	LT255/75R17	C	111/108S	BSW	6.5-8.5	50	2,405/2,205	32.0	9.5	15.0	652	46.1	3PMSF
	2021667	LT265/70R17	E	121/118S	RWL	7.0-8.5	80	3,195/2,910	31.6	10.6	15.0	661	48.8	3PMSF
	2021650	LT275/70R17	E	121/118S	RWL	7.0-9.0	80	3,195/2,910	32.1	10.6	15.5	652	56.8	3PMSF
	2021640	LT285/70R17	E	121/118S	RWL	7.5-9.0	80	3,195/2,910	32.7	11.2	15.5	639	58.7	3PMSF
	2021704	LT285/75R17	E	121/118S	BSW	7.5-9.5	80	3,195/2,910	33.8	10.6	15.5	618	60.7	3PMSF
	2021662	LT295/70R17	E	121/118S	BSW	7.5-10.0	80	3,195/2,910	33.2	11.5	15.5	630	61.5	3PMSF
	2021661	LT315/70R17	E	121/118S	RWL	8.0-10.5	65	3,195/2,910	34.4	12.3	15.5	608	69.5	3PMSF
	2021663	35X12.50R17LT	E	121S	RWL	8.0-10.5	65	3,195/-	34.5	11.7	16.0	606	69.4	3PMSF

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

* Road Hazard Warranty does not apply to LT-Metric tires

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	Tech	
						psi	lbs							
18	2021809	LT265/60R18	E	119/116S	BSW	8.0-9.5	80	3,000/2,755	30.5	10.9	14.5	686	46.8	3PMSF
	2021707	LT265/65R18	E	122/119S	BSW	8.0-9.5	80	3,305/3,000	31.4	10.6	15.0	665	49.8	3PMSF
	2021634	LT265/70R18	E	124/121S	BSW	7.0-9.0	80	3,525/3,195	32.6	10.5	15.0	641	50.2	3PMSF
	2021642	LT275/65R18	E	123/120S	BSW	7.5-9.0	80	3,415/3,085	32.1	11.0	14.5	652	61.1	3PMSF
	2021641	LT275/70R18	E	125/122S	BSW	7.0-8.5	80	3,640/3,305	33.1	10.8	14.5	631	63.1	3PMSF
	2021664	LT285/65R18	E	125/122S	BSW	8.5-10.0	80	3,640/3,195	32.6	11.4	14.5	642	63.3	3PMSF
	2021708	LT285/75R18	E	129/126S	BSW	7.5-9.5	80	4,080/3,750	34.8	10.6	14.5	601	66.8	3PMSF
	2021709	LT295/70R18	E	129/126S	BSW	7.5-10.0	80	4,080/3,750	34.4	11.1	14.5	608	67.5	3PMSF
	2021717	LT305/65R18	E	124/121S	BSW	9.0-11.0	65	3,525/3,195	33.7	11.7	14.5	621	69.5	3PMSF
	2021655	LT325/60R18	E	124/121S	BSW	9.5-11.5	65	3,525/3,195	33.3	13.1	14.5	628	69.4	3PMSF
	2021666	LT325/65R18	E	127/124S	BSW	9.5-11.5	65	3,860/3,525	34.6	12.8	14.5	605	75.9	3PMSF
	2021705	33X12.50R18LT	F	122S	BSW	8.5-11.0	80	3,305/-	32.5	12.2	15.5	643	67.2	3PMSF
	2021718	35X12.50R18LT	F	128S	BSW	8.5-11.0	80	3,970/-	34.5	11.9	16.0	606	73.2	3PMSF
20	2021648	LT265/60R20	E	121/118S	BSW	8.0-9.5	80	3,195/2,910	32.5	10.7	14.5	644	55.0	3PMSF
	2021636	LT275/55R20	D	115/112S	BSW	7.5-9.5	65	2,680/2,470	31.9	11.6	14.5	656	55.2	3PMSF
	2021638	LT275/60R20	D	119/116S	BSW	7.5-9.5	65	3,000/2,755	32.9	11.1	14.5	635	57.1	3PMSF
	2021635	LT275/65R20	E	126/123S	BSW	7.5-9.5	80	3,750/3,415	34.0	11.2	14.5	614	64.6	3PMSF
	2021637	LT285/55R20	E	122/119S	BSW	8.0-10.0	80	3,305/3,000	32.4	11.8	16.0	646	63.6	3PMSF
	2021711	LT285/60R20	E	125/122S	BSW	8.5-10.0	80	3,640/3,305	33.5	11.6	14.5	625	64.9	3PMSF
	2021712	LT295/55R20	E	123/120S	BSW	8.5-10.5	80	3,415/3,085	32.8	12.3	16.0	638	65.1	3PMSF
	2021657	LT295/60R20	E	126/123S	BSW	8.5-10.5	80	3,750/3,415	33.9	12.0	15.0	617	69.7	3PMSF
	2021807	LT305/55R20	F	125/122S	BSW	9.0-11.0	80	3,640/3,305	33.2	12.7	15.5	630	69.6	3PMSF
	2021710	33X12.50R20LT	F	119S	BSW	8.5-11.0	80	3,000/-	32.6	12.6	14.5	641	66.4	3PMSF
22	2021714	35X12.50R22LT	F	121S	BSW	8.5-11.0	80	3,195/-	34.5	12.7	15.5	606	70.1	3PMSF

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

*Road Hazard Warranty does not apply to LT-Metric tires

About Hankook

ION

Ventus Kinergy Weatherflex

Dynapro

Winter

Vantra

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	Tech	
						psi	lbs							
17	2021505	35X12.50R17LT	F	121R	BSW	8.0-10.5	80	3,195	34.5	11.9	17.0	605	71.1	3PMSF
	2021366	37X12.50R17LT	D	124R	BSW	8.0-10.5	50	3,525	36.6	11.7	17.0	572	69.9	3PMSF
	2021367	LT235/80R17	E	120/117R	BSW	6.0-8.0	80	3,085 / 2,835	31.7	8.8	15.5	659	44.2	3PMSF
	2021368	LT245/75R17	E	121/118R	BSW	6.5-8.0	80	3,195 / 2,910	31.4	9.4	15.5	665	45.7	3PMSF
	2021369	LT255/75R17	C	111/108R	BSW	6.5-8.5	50	2,405 / 2,205	32.0	9.6	15.5	654	46.7	3PMSF
	2021370	LT255/80R17	E	121/118R	BSW	6.5-8.5	80	3,195 / 2,910	33.0	9.6	15.5	633	49.3	3PMSF
	2021371	LT265/70R17	E	121/118R	BSW	7.0-9.0	80	3,195 / 2,910	31.6	10.4	15.5	661	48.3	3PMSF
	2021497	LT285/70R17	E	121/118R	BSW	7.5-9.5	80	3,195 / 2,910	32.7	11.2	15.5	639	57.8	3PMSF
	2021373	LT285/75R17	E	121/118R	BSW	7.5-9.5	80	3,195 / 2,910	33.8	10.6	15.5	618	60.4	3PMSF
	2021374	LT295/70R17	E	121/118R	BSW	7.5-10.0	80	3,195 / 2,910	33.3	11.4	15.5	628	59.7	3PMSF
18	2021498	LT315/70R17	E	121/118R	BSW	8.0-10.5	65	3,195 / 2,910	34.4	12.2	15.5	608	69.9	3PMSF
	2021376	33X12.50R18LT	F	122R	BSW	8.5-11.0	80	3,305	32.5	12.3	17.0	643	65.9	3PMSF
	2021506	35X12.50R18LT	F	128R	BSW	8.5-11.0	80	3,970	34.5	12.0	17.0	605	72.3	3PMSF
	2021499	LT275/65R18	E	123/120R	BSW	8.0-9.5	80	3,415 / 3,085	32.0	10.9	15.5	652	61.7	3PMSF
	2021501	LT275/70R18	E	125/122R	BSW	7.0-9.0	80	3,640 / 3,305	33.1	10.8	15.5	631	62.7	3PMSF
	2021500	LT285/65R18	E	125/122R	BSW	8.0-10.0	80	3,640 / 3,305	32.5	11.4	15.5	643	63.8	3PMSF
	2021381	LT285/75R18	E	129/126R	BSW	7.5-9.5	80	4,080 / 3,750	34.8	10.6	15.5	600	65.5	3PMSF
20	2021382	LT295/70R18	E	129/126R	BSW	7.5-10.0	80	4,080 / 3,750	34.3	11.4	15.5	610	66.5	3PMSF
	2021384	33X12.50R20LT	F	119R	BSW	8.5-11.0	80	3,000	32.5	12.6	17.0	643	66.8	3PMSF
	2021388	LT275/65R20	E	126/123R	BSW	8.0-9.5	80	3,750 / 3,415	34.0	11.2	15.5	615	65.0	3PMSF
	2021389	LT285/55R20	E	122/119R	BSW	8.5-10.0	80	3,305 / 3,000	32.4	11.9	15.5	644	62.5	3PMSF
	2021390	LT295/55R20	E	123/120R	BSW	8.5-10.5	80	3,415 / 3,085	32.8	12.3	15.5	638	63.2	3PMSF
	2021391	LT295/60R20	E	126/123R	BSW	8.5-10.5	80	3,750 / 3,415	33.9	11.9	15.5	617	67.9	3PMSF
	2021393	LT305/55R20	F	125/122R	BSW	9.0-11.0	80	3,640 / 3,305	33.2	12.6	15.5	629	66.8	3PMSF
22	2021394	33X12.50R22LT	F	114R	BSW	8.5-11.0	80	2,600	32.5	12.8	15.5	643	68.2	3PMSF
	2021395	35X12.50R22LT	F	121R	BSW	8.5-11.0	80	3,195	34.5	12.6	17.0	606	72.6	3PMSF

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

*Road Hazard Warranty does not apply to LT-Metric tires

Dynapro MT2 | RT05 LT-Metric

Mud Terrain

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	
						psi	lbs						
15	2020980	30X9.50R15LT	C	104Q	OWL	6.0-8.0	50	1,985	29.7	9.0	17.0	704	41.3
	2020981	31X10.50R15LT	C	109Q	OWL	7.0-9.0	50	2,270	30.7	10.1	17.5	679	47.5
	2020982	32X11.50R15LT	C	113Q	OWL	6.5-8.5	50	2,535	31.8	10.6	17.0	657	52.9
	2020983	33X12.50R15LT	C	108Q	OWL	8.5-11.0	35	2,205	32.8	11.7	17.0	636	59.6
	2020985	LT215/75R15	C	100/97Q	OWL	5.5-7.0	50	1,765 / 1,610	27.8	8.3	15.5	751	35.7
	2020986	LT235/75R15	C	104/101Q	OWL	6.0-8.0	50	1,985 / 1,820	29.0	8.9	16.0	720	39.1
16	2020730	LT215/85R16	E	115/112Q	BSW	5.5-7.0	80	2,680 / 2,470	30.5	8.0	17.0	685	43.9
	2020799	LT225/75R16	E	115/112Q	BSW	6.0-7.5	80	2,680 / 2,470	29.4	8.5	17.0	710	42.4
	2020800	LT245/75R16	E	120/116Q	BSW	6.5-8.0	80	3,042 / 2,778	30.6	9.5	17.5	684	48.0
	2020988	LT265/75R16	E	123/120Q	OWL	7.0-9.0	80	3,415 / 3,085	31.8	10.0	17.0	657	54.1
	2021075	LT305/70R16	E	124/121Q	OWL	8.0-10.0	65	3,525 / 3,195	33.0	11.8	18.5	633	67.9
	2020990	LT315/75R16	E	127/124Q	OWL	8.0-10.5	65	3,860 / 3,525	34.8	11.7	17.5	601	70.9
17	2020790	35X12.50R17LT	E	121Q	BSW	8.0-10.5	65	3,195	34.7	12.0	18.5	602	73.4
	2022193	37X12.50R17LT	D	124Q	BSW	8.0-10.5	50	3,525	36.7	11.5	20.0	570	79.7
	2021077	LT245/75R17	E	121/118Q	OWL	6.5-8.0	80	3,195 / 2,910	31.7	9.3	17.5	659	50.6
	2020801	LT255/75R17	E	121/118Q	BSW	6.5-8.5	80	3,195 / 2,910	32.2	9.8	17.0	650	51.4
	2020765	LT265/70R17	E	121/118Q	OWL	7.0-9.0	80	3,195 / 2,910	31.9	10.4	17.5	656	52.9
	2020991	LT285/70R17	E	121/118Q	OWL	7.5-9.5	80	3,195 / 2,910	32.9	11.3	18.5	635	64.4
	2020802	LT295/70R17	E	121/118Q	BSW	7.5-10.0	80	3,195 / 2,910	33.5	11.5	17.0	624	65.9
	2020803	LT315/70R17	D	121/118Q	BSW	8.0-10.5	50	3,195 / 2,910	34.6	12.3	18.0	605	72.9
18	2021406	33X12.50R18LT	F	122Q	BSW	8.5-11.0	80	3,305	32.7	12.2	16.5	616	69.4
	2021407	35X12.50R18LT	F	128Q	BSW	8.5-11.0	80	3,970	34.8	12.0	19.0	580	76.0
	2021076	LT235/80R17	E	120/117Q	BSW	6.0-8.0	80	3,085 / 2,835	31.9	8.7	17.0	654	48.5
	2020798	LT235/85R16	E	120/116Q	BSW	6.0-7.5	80	3,042 / 2,778	31.9	8.8	17.0	655	48.9
	2020806	LT275/65R18	E	123/120Q	BSW	8.0-9.5	80	3,415 / 3,085	32.2	10.9	18.0	649	64.7
	2020807	LT285/65R18	E	125/122Q	BSW	8.0-10.0	80	3,640 / 3,305	32.7	11.4	17.5	639	68.1
	2020989	LT285/75R16	E	126/123Q	OWL	7.5-9.5	80	3,750 / 3,415	33.0	10.6	17.0	633	63.4
	2020805	LT295/70R18	E	129/126Q	BSW	7.5-10.0	80	4,080 / 3,750	34.5	11.5	17.0	606	71.9
	2021079	LT305/70R18	E	126/123Q	OWL	8.0-10.0	65	3,750 / 3,415	35.0	11.8	18.5	597	77.1
20	2021409	33X12.50R20LT	F	119Q	BSW	8.5-11.0	80	3,000	32.8	12.6	17.0	616	69.6
	2021412	LT275/55R20	E	120/117Q	BSW	7.5-9.5	80	3,085 / 2,835	32.2	11.3	18.5	649	63.0
	2021080	LT285/55R20	E	122/119Q	BSW	8.5-10.0	80	3,305 / 3,000	32.6	11.9	17.5	642	67.0
	2020809	LT295/55R20	E	123/120Q	BSW	8.5-10.5	80	3,415 / 3,085	33.0	12.3	16.0	634	68.9
	2021414	LT305/55R20	F	125/122Q	BSW	9.0-11.0	80	3,640 / 3,305	33.4	12.3	18.0	604	72.5
22	2021415	33X12.50R22LT	F	114Q	BSW	8.5-11.0	80	2,600	32.7	12.8	17.0	639	66.0
	2021416	35X12.50R22LT	F	121Q	BSW	8.5-11.0	80	3,195	34.7	12.3	17.0	602	73.0

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

* Road Hazard Warranty does not apply to LT-Metric tires

About Hankook

ION

Ventus

Dynapro

Winter

Vantra





Winter

Winter i*cept

Winter i*cept evo3 | W330

Winter i*cept evo3 X | W330A

Winter i*cept iZ3 | W636

Winter i*cept iZ3 X | W636A

Winter i*poke

Winter i*Pike RS2 | W429

Winter i*Pike X | W429A

i*Pike RW11 | RW11

Winter i*Pike LV | RW15

About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

Winter i*cept evo³ (W330)
Winter i*cept evo³ x (W330A)

A winter perfection in all conditions



Test & Design award




reddot winner 2020

Warranty



3D winter sipe

Serrated winter sipe improves braking performance in winter driving. This special sipe enhances driving stability by minimizing block movement.

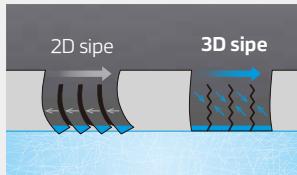

Snow pick traction groove




Unidirectional Tread design with gull wing shaped improves the traction and braking performance on snow.

V-shaped pattern



V-shaped pattern efficiently help to distribute water to the side, improving hydroplaning performance.

Wide shoulder block

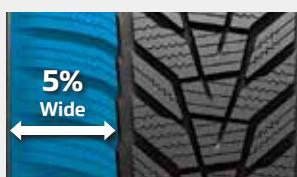

Wider outside shoulder block ensures dry handling performance, lateral stability and steering response.

Optimized block stiffness



Reduction of the kerf thickness optimizes each block stiffness to achieve advanced dry performance and road holding.


Water pipe kerf



The water pipe kerf placed inside the shoulder block improves performance on wet surface by efficiently transporting water out of the main groove.



Wide lateral groove

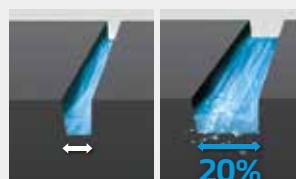


Conventional

Winter i*cept evo³

20% wider lateral groove improves water displacing capability compared to winter i*cept evo².

Test result

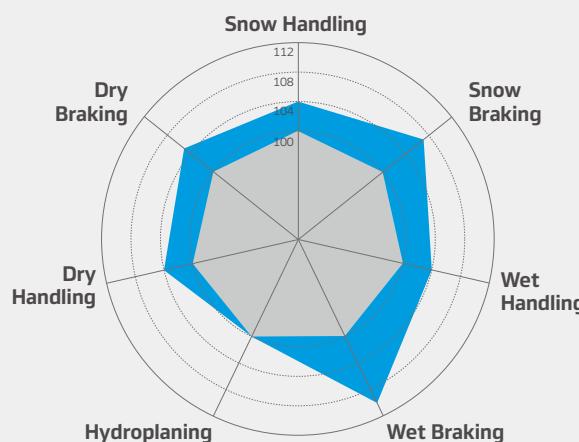


Winter i*Pike RS² (W429)
Winter i*Pike X (W429A)

The new specialty for the northern winter




Claw edge

The claw edges on both sides of the tread provide better grip performance on snow.

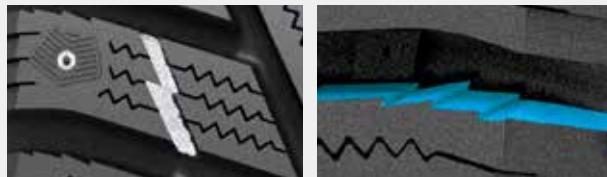


The new stud technology

Empty space is designed at the bottom of the Stud pin to reduce impact from the road and improve performance by increasing the number of pins innovatively.

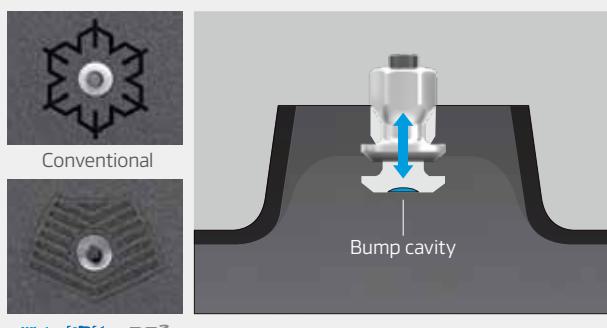


3D sipe technology

Optimised 3D sipe technology ensures better handling performance during winter driving.

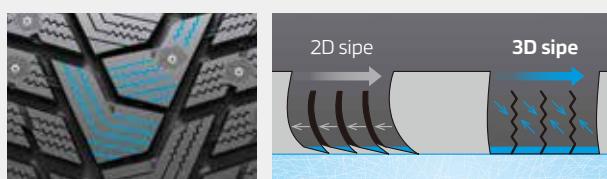

Ice slit design technology

Innovative ice slit design technology provides excellent ice traction.

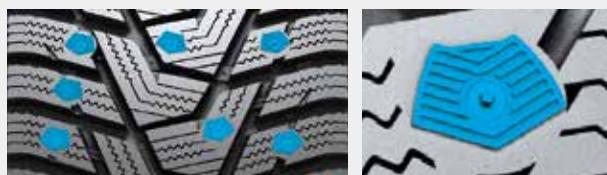


Zig-zag winter groove



Z-shape deep snow grooves on the tread provide maximised grip performance on the deep snow.

Wide center block

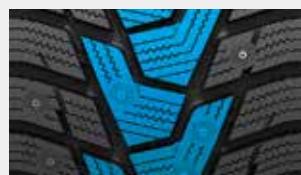


Wide block in the center of the tread provides improved snow and ice traction.

2-in-1 shoulder block



Unique shoulder block design ensures better grip during the winter driving.


Side edge

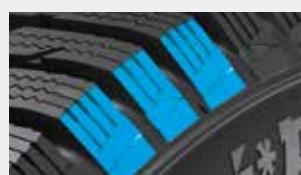

The step-down design provides better Side snow grip by increasing friction surface and edge in deep snow road.

Ice-philic silica

Ice-philic silica particles are uniformly distributed to maintain soft rubber compounds in cold conditions.

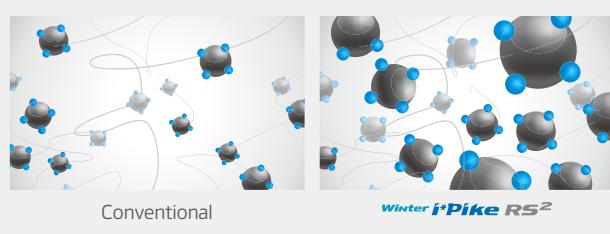

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	Tech	
						psi	lbs							
17	1026304	225/60R17	SL	99H	BSW	6.0-8.0	51	1,709	27.5	9.3	10.5	754	24.3	3PMSF
	1026305	215/60R17	SL	96H	BSW	6.0-7.5	51	1,565	27.1	9.0	10.5	768	22.5	3PMSF
	1026320	245/45R17	XL	99V	BSW	7.5-9.0	50	1,709	25.5	9.9	10.5	814	23.7	3PMSF
	1026329	235/45R17	XL	97V	BSW	7.5-9.0	50	1,609	25.2	9.6	10.5	824	22.2	3PMSF
	1026345	235/50R17	XL	100V	BSW	6.5-8.5	50	1,764	26.2	10.0	10.5	794	23.2	3PMSF
18	1026226	225/45R18	XL	95V	BSW	7.0-8.5	50	1,521	25.7	9.2	10.5	808	22.3	3PMSF
	1026306	225/40R18	XL	92V	BSW	7.5-9.0	50	1,389	24.8	9.4	10.5	837	19.8	3PMSF
	1026307	245/45R18	XL	100V	BSW	7.5-9.0	50	1,764	26.5	9.9	10.5	783	25.5	3PMSF
	1026309	235/45R18	XL	98V	BSW	7.5-9.0	50	1,653	26.2	9.6	10.5	793	23.6	3PMSF
	1026310	215/55R18	XL	99V	BSW	6.0-7.5	50	1,709	27.2	9.1	10.5	765	23.7	3PMSF
	1026312	225/50R18	XL	99V	BSW	6.0-8.0	50	1,709	26.8	9.8	10.5	776	24.2	3PMSF
	1026313	245/40R18	XL	97V	BSW	8.0-9.5	50	1,609	25.6	10.1	10.5	812	22.6	3PMSF
	1026317	235/40R18	XL	95V	BSW	8.0-9.5	50	1,521	25.3	9.8	10.5	822	21.9	3PMSF
	1026328	245/50R18	XL	104V	BSW	7.0-8.5	50	1,984	27.6	10.5	10.5	753	26.5	3PMSF
	1026360	255/35R18	XL	94V	BSW	8.5-10.0	50	1,477	24.9	10.6	10.5	835	22.5	3PMSF
19	1026311	245/45R19	XL	102V	BSW	7.5-9.0	50	1,874	27.5	9.9	10.5	755	26.2	3PMSF
	1026314	245/40R19	XL	98V	BSW	8.0-9.5	50	1,653	26.6	10.1	10.5	782	25.1	3PMSF
	1026315	255/35R19	XL	96V	BSW	8.5-10.0	50	1,565	25.9	10.6	10.5	803	24.5	3PMSF
	1026316	235/35R19	XL	91W	BSW	8.0-9.5	50	1,356	25.3	10.0	10.5	820	22.8	3PMSF
	1026318	235/45R19	XL	99V	BSW	7.5-9.0	50	1,709	27.2	9.6	10.5	763	24.9	3PMSF
	1026319	235/40R19	XL	96V	BSW	8.0-9.5	50	1,565	26.3	9.8	10.5	791	22.8	3PMSF
	1026321	255/40R19	XL	100V	BSW	8.5-10.0	50	1,764	26.9	10.6	10.5	772	25.2	3PMSF
	1026322	225/40R19	XL	93V	BSW	7.5-9.0	50	1,433	25.8	9.4	10.5	804	22.1	3PMSF
	1026323	245/35R19	XL	93W	BSW	8.0-9.5	50	1,433	25.6	10.1	10.5	810	23.0	3PMSF
	1026326	225/45R19	XL	96V	BSW	7.0-8.5	50	1,565	26.8	9.2	10.5	775	22.7	3PMSF
	1026327	255/45R19	XL	104W	BSW	8.0-9.5	50	1,984	27.9	10.4	10.5	744	27.5	3PMSF
20	1026335	245/45R20	XL	103V	BSW	7.5-9.0	50	1,929	28.5	9.9	10.5	728	27.3	3PMSF
	1026338	255/35R20	XL	97W	BSW	8.5-10.0	50	1,609	26.9	10.6	10.5	773	26.2	3PMSF
	1026339	245/40R20	XL	99W	BSW	8.0-9.5	50	1,709	27.6	10.1	10.5	753	25.6	3PMSF
	1026341	245/35R20	XL	95W	BSW	8.0-9.5	50	1,521	26.6	10.1	10.5	780	24.2	3PMSF
	1026347	275/30R20	XL	97W	BSW	9.0-10.0	50	1,609	26.4	11.5	10.5	787	27.8	3PMSF
	1026357	235/35R20	XL	92W	BSW	8.0-9.5	50	1,389	26.3	10.0	10.5	789	22.6	3PMSF
	1027229	275/35R21	XL	103W	BSW	9.0-11.0	50	1,929	28.4	11.2	10.5	731	29.1	3PMSF

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters
Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.
Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Winter i*cept evo³ x | W330A Studless

Ultra-High Performance Winter

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Rev/Mile	Weight	Tech	
						psi	lbs							
17	1026384	215/65R17	SL	99V	BSW	6.0-7.5	51	1,709	27.9	8.8	10.5	744	25.5	3PMF
	1026385	235/55R17	XL	103V	BSW	6.5-8.5	50	1,929	27.2	9.7	10.5	765	26.7	3PMF
	1026386	225/65R17	SL	102H	BSW	6.0-8.0	51	1,874	28.4	9.2	10.5	731	26.8	3PMF
	1026388	235/65R17	XL	108V	BSW	6.5-8.5	50	2,205	28.9	9.5	10.5	718	28.0	3PMF
	1026402	235/60R17	XL	106H	BSW	6.5-8.5	50	2,094	28.0	9.6	10.5	742	26.1	3PMF
	1026407	255/65R17	XL	114H	BSW	7.0-9.0	50	2,601	30.0	10.3	10.5	693	31.6	3PMF
18	1026387	225/55R18	XL	102V	BSW	6.0-8.0	50	1,874	27.6	9.6	10.5	752	26.1	3PMF
	1026389	235/60R18	XL	107H	BSW	6.5-8.5	50	2,149	29.0	9.6	10.5	717	27.9	3PMF
	1026392	235/50R18	XL	101V	BSW	6.5-8.5	50	1,819	27.2	10.0	10.5	765	27.2	3PMF
	1026395	235/55R18	XL	104V	BSW	6.5-8.5	50	1,984	28.0	10.2	10.5	741	28.0	3PMF
	1026397	225/60R18	XL	104V	BSW	6.0-8.0	50	1,984	28.5	9.3	10.5	728	27.6	3PMF
	1026399	255/55R18	XL	109V	BSW	7.0-9.0	50	2,271	28.9	10.9	10.5	719	32.0	3PMF
	1026401	265/60R18	XL	114H	BSW	7.5-9.5	50	2,601	30.5	10.9	10.5	682	34.1	3PMF
	1026404	255/60R18	XL	112V	BSW	7.0-9.0	50	2,469	29.9	10.6	10.5	694	32.2	3PMF
	1027212	245/60R18	SL	105H	BSW	7.0-8.5	51	2,039	29.4	10.0	10.5	706	29.8	3PMF
	1028842	225/60R18	XL	104H	BSW	6.0-8.0	50	1,984	28.6	9.7	9.5	727	27.7	3PMF
19	1026391	235/55R19	XL	105V	BSW	6.5-8.5	50	2,039	29.0	10.2	10.5	716	29.5	3PMF
	1026394	235/50R19	XL	103V	BSW	6.5-8.5	50	1,929	28.2	10.0	10.5	738	28.3	3PMF
	1026398	255/50R19	XL	107V	BSW	7.0-9.0	50	2,149	28.9	11.0	10.5	718	30.1	3PMF
	1026403	255/55R19	XL	111V	BSW	7.0-9.0	50	2,403	29.9	10.9	10.5	695	32.2	3PMF
	1026408	225/55R19	SL	99V	BSW	6.0-8.0	51	1,709	28.6	9.6	10.5	726	27.3	3PMF
	1026410	265/50R19	XL	110V	BSW	7.5-9.5	50	2,337	29.3	11.3	10.5	708	33.1	3PMF
	1026423	245/50R19	XL	105V	BSW	7.0-8.5	50	2,039	28.6	10.5	10.5	727	29.2	3PMF
	1027217	275/55R19	SL	111H	BSW	7.5-9.5	51	2,403	30.7	11.7	10.5	675	36.4	3PMF
20	1026400	255/45R20	XL	105V	BSW	8.0-9.5	50	2,039	28.9	10.4	10.5	718	30.2	3PMF
	1026405	275/40R20	XL	106V	BSW	9.0-11.0	50	2,094	28.5	11.3	10.5	728	32.1	3PMF
	1026406	255/50R20	XL	109V	BSW	7.0-9.0	50	2,271	29.9	11.0	10.5	694	32.6	3PMF
	1026412	265/50R20	XL	111V	BSW	7.5-9.5	50	2,403	30.3	11.3	10.5	685	34.3	3PMF
	1026413	315/35R20	XL	110V	BSW	10.5-12.5	50	2,337	28.7	12.4	10.5	725	35.4	3PMF
	1026419	275/45R20	XL	110W	BSW	8.5-10.5	50	2,337	29.6	11.1	10.5	701	34.8	3PMF
	1026421	265/45R20	XL	108V	BSW	8.5-10.0	50	2,205	29.2	10.8	10.5	711	31.3	3PMF
	1026425	255/55R20	XL	110V	BSW	7.0-9.0	50	2,337	30.9	10.9	10.5	673	34.9	3PMF
	1027222	235/55R20	XL	105V	BSW	6.5-8.5	50	2,039	30.0	10.2	10.5	692	30.9	3PMF
	1026409	295/35R21	XL	107V	BSW	10.0-11.5	50	2,149	28.8	12.3	10.5	720	33.5	3PMF
21	1026414	275/45R21	XL	110V	BSW	8.5-10.5	50	2,337	30.6	11.1	10.5	678	35.9	3PMF
	1026416	265/40R21	XL	105V	BSW	9.0-10.5	50	2,039	29.1	11.0	10.5	715	30.4	3PMF
	1027227	285/45R21	XL	113W	BSW	9.0-10.5	50	2,535	30.9	11.5	10.5	672	36.8	3PMF

About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

S-Code		Inch	Non-Stud	Factory Stud	Size	LI/SS	Sidewall	Rim Width Range	Max. Load				Weight			
									psi	Ibs	Overall Diameter	Section Width	Tread Depth	Revs/Mile	Non-Stud	Factory Stud
13	1026791	1026790	175/70R13	SL	82T	BSW	4.5-6.0	51	1,047	22.6	7.0	11.0	920	15.0	15.4	3PMF
14	1028949	1029017	175/65R14	SL	82T	BSW	5.0-6.0	51	1,047	22.9	7.3	11.0	909	15.5	15.9	3PMF
	1026793	1026792	175/70R14	XL	88T	BSW	4.5-6.0	50	1,235	23.6	7.0	11.0	882	16.3	16.7	3PMF
	1026817	1026816	185/60R14	SL	82T	BSW	5.0-6.5	51	1,047	22.6	7.4	11.0	917	16.6	16.9	3PMF
	1028950	1029018	185/65R14	SL	86T	BSW	5.0-6.5	51	1,168	23.3	7.8	11.0	891	17.4	17.8	3PMF
	1028951	1029019	185/70R14	SL	88T	BSW	4.5-6.0	51	1,235	24.1	7.5	11.0	861	17.8	18.1	3PMF
	1028943	1029011	195/70R14	SL	91T	BSW	5.0-6.5	51	1,356	24.7	7.9	11.0	842	18.5	18.9	3PMF
15	1028956	1029024	185/55R15	XL	86T	BSW	5.0-6.5	50	1,168	22.9	7.8	11.0	908	17.3	17.7	3PMF
	1028934	1029002	185/60R15	SL	84T	BSW	5.0-6.5	51	1,102	23.6	7.8	11.0	880	17.4	17.7	3PMF
	1028929	1028997	185/65R15	SL	88T	BSW	5.0-6.5	51	1,235	24.3	7.8	11.0	854	18.4	18.8	3PMF
	1028936	1029004	195/60R15	SL	88T	BSW	5.5-7.0	51	1,235	24.1	8.2	11.0	862	18.7	19.1	3PMF
	1026821	1026820	195/65R15	SL	91T	BSW	5.0-6.5	51	1,356	24.9	8.1	11.0	835	20.6	21.0	3PMF
	1028954	1029022	205/60R15	SL	91T	BSW	5.5-7.5	51	1,356	24.6	8.6	11.0	846	20.1	20.4	3PMF
	1026825	1026824	205/65R15	SL	94T	BSW	5.5-7.5	51	1,477	25.3	8.5	11.0	819	21.4	21.7	3PMF
	1028945	1029013	215/70R15	SL	98T	BSW	5.5-7.0	51	1,653	26.8	8.7	11.0	776	24.0	24.4	3PMF
16	1028944	1029012	195/55R16	SL	87T	BSW	5.5-7.0	51	1,201	24.3	8.4	11.0	856	18.8	19.2	3PMF
	1028953	1029021	205/50R16	SL	87T	BSW	5.5-7.5	51	1,201	23.9	8.9	11.0	867	19.2	19.6	3PMF
	1026801	1026800	205/55R16	XL	94T	BSW	5.5-7.5	50	1,477	24.7	9.1	11.0	840	21.1	21.5	3PMF
	1028925	1028993	205/60R16	SL	92T	BSW	5.5-7.5	51	1,389	25.6	8.6	11.0	813	21.6	22.1	3PMF
	1026827	1026826	205/65R16	SL	95T	BSW	5.5-7.5	51	1,521	26.3	8.5	11.0	788	22.8	23.2	3PMF
	1026803	1026802	215/55R16	XL	97T	BSW	6.0-7.5	50	1,609	25.1	8.9	11.0	827	24.1	24.4	3PMF
	1026829	1026828	215/60R16	XL	99T	BSW	6.0-7.5	50	1,709	26.0	9.0	11.0	798	25.0	25.4	3PMF
	1028927	1028995	215/65R16	SL	98T	BSW	6.0-7.5	51	1,653	26.9	8.8	11.0	772	25.6	25.6	3PMF
	1028935	1029003	225/60R16	XL	102T	BSW	6.0-8.0	50	1,874	26.5	9.3	11.0	784	25.4	25.8	3PMF
17	1026831	1026830	205/50R17	XL	93T	BSW	5.5-7.5	50	1,433	25.0	8.9	11.0	832	20.5	20.9	3PMF
	1032477	1032478	205/55R17	XL	95T	BSW	5.5-7.5	50	1,521	25.8	9.1	11.0	806	22.6	22.4	3PMF
	1028941	1029009	215/45R17	SL	87T	BSW	7.0-8.0	51	1,201	24.5	8.7	11.0	848	19.5	19.8	3PMF
	1026835	1026834	215/50R17	XL	95T	BSW	6.0-8.0	50	1,521	25.4	9.4	11.0	819	23.5	23.9	3PMF
	1028926	1028994	215/55R17	SL	94T	BSW	6.0-7.5	51	1,477	26.2	9.1	11.0	794	23.7	24.1	3PMF
	1026841	1026840	225/45R17	XL	94T	BSW	7.0-8.5	50	1,477	24.8	9.2	11.0	837	22.6	22.9	3PMF
	1026839	1026838	225/50R17	XL	98T	BSW	6.0-8.0	50	1,653	25.8	9.7	11.0	806	25.6	26.0	3PMF
	1026837	1026836	225/55R17	XL	101T	BSW	6.0-8.0	50	1,819	26.6	9.6	11.0	780	26.2	26.6	3PMF
	1028946	1029014	235/45R17	XL	97T	BSW	7.5-9.0	50	1,609	25.2	9.6	11.0	824	24.5	24.9	3PMF
	1026805	1026804	235/55R17	XL	103T	BSW	6.5-8.5	50	1,929	27.0	10.2	11.0	769	27.8	28.2	3PMF
18	1029708	1029710	215/55R18	SL	95T	BSW	6.0-7.5	51	1,521	27.2	9.1	11.0	765	25.5	25.9	3PMF
	1028940	1029008	225/50R18	SL	95T	BSW	6.0-8.0	51	1,521	26.8	9.7	11.0	776	27.2	27.5	3PMF
	1032480	1032479	235/45R18	XL	98T	BSW	7.5-9.0	50	1,653	26.2	9.6	11.0	793	25.3	25.3	3PMF
	1028948	1029016	245/45R18	XL	100T	BSW	7.5-9.0	50	1,764	26.5	9.9	11.0	783	27.0	27.4	3PMF

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

S-Code			Max. Load								Weight					
Inch	Non-Stud	Factory Stud	Size	LI/SS	Sidewall	Rim Width Range	psi	lbs	Overall Diameter	Section Width	Tread Depth	Rev/Mile	Non-Stud	Factory Stud	Tech	
15	1026809	1026808	205/70R15	SL	96T	BSW	5.0-7.0	51	1,565	26.4	8.3	12.5	786	25.5	25.8	3PMF
	1028952	1029020	205/75R15	SL	97T	BSW	5.0-7.0	51	1,609	27.1	8.1	12.5	767	25.9	26.2	3PMF
	1026041	1026770	235/75R15	XL	109T	BSW	6.0-8.0	50	2,271	28.8	9.0	12.5	721	31.1	31.4	3PMF
16	1026807	1026806	215/70R16	SL	100T	BSW	5.5-7.0	51	1,764	27.9	8.8	12.5	745	27.9	28.2	3PMF
	1028494	1029888	225/65R16	SL	100T	BSW	6.0-8.0	51	1,764	27.4	9.3	12.5	758	28.2	28.6	3PMF
	1028947	1029015	225/70R16	XL	107T	BSW	6.0-7.5	50	2,149	28.4	8.9	12.5	732	30.0	30.4	3PMF
	1026040	1026771	225/75R16	SL	104T	BSW	6.0-7.5	51	1,984	29.2	8.6	12.5	710	30.4	30.8	3PMF
	1028496	1029889	235/65R16	SL	103T	BSW	6.5-8.5	51	1,929	28.0	9.4	12.5	743	30.1	30.6	3PMF
	1028930	1028998	235/70R16	XL	109T	BSW	6.0-8.0	50	2,271	28.9	9.4	12.5	719	32.1	32.4	3PMF
	1026845	1026844	245/70R16	SL	107T	BSW	6.5-8.0	51	2,149	29.5	9.6	12.5	704	33.6	34.0	3PMF
	1028497	1029890	245/75R16	SL	111T	BSW	6.5-8.0	51	2,403	30.4	9.6	12.5	683	35.0	35.6	3PMF
	1028498	1029891	255/70R16	SL	111T	BSW	6.5-8.5	51	2,403	30.0	10.1	12.5	692	35.8	36.1	3PMF
	1028928	1028996	265/70R16	SL	112T	BSW	7.0-9.0	51	2,469	30.6	10.9	12.5	679	37.2	37.8	3PMF
	1028499	1029892	265/75R16	SL	116T	BSW	7.0-9.0	51	2,756	31.6	10.3	12.5	658	39.6	39.9	3PMF
17	1028955	1029023	215/60R17	XL	100T	BSW	6.0-7.5	50	1,764	27.1	9.1	12.5	766	27.6	28.2	3PMF
	1026038	1026773	215/65R17	XL	103T	BSW	6.0-7.5	50	1,929	28.0	8.8	12.5	742	29.5	29.8	3PMF
	1028920	1028988	225/60R17	XL	103T	BSW	6.0-8.0	50	1,929	27.6	9.4	12.5	754	29.4	29.7	3PMF
	1026843	1026842	225/65R17	SL	102T	BSW	6.0-8.0	51	1,874	28.4	9.3	12.5	731	30.3	30.6	3PMF
	1028957	1029025	235/60R17	XL	106T	BSW	6.5-8.5	50	2,094	28.1	9.9	12.5	740	31.4	32.0	3PMF
	1028922	1028990	235/65R17	XL	108T	BSW	6.5-8.5	50	2,205	29.0	9.4	12.5	717	32.4	34.0	3PMF
	1026053	1026774	245/65R17	XL	111T	BSW	7.0-8.5	50	2,403	29.5	9.8	12.5	704	33.5	33.8	3PMF
	1028933	1029001	245/70R17	SL	110T	BSW	6.5-8.0	51	2,337	30.5	9.6	12.5	681	35.2	35.6	3PMF
	1028937	1029005	255/65R17	SL	110T	BSW	7.0-9.0	51	2,337	30.0	10.5	12.5	692	36.1	36.5	3PMF
	1028939	1029007	265/65R17	SL	112T	BSW	7.5-9.5	51	2,469	30.5	10.7	12.5	681	37.4	37.8	3PMF
	1028916	1028984	265/70R17	SL	115T	BSW	7.0-9.0	51	2,679	31.6	10.6	12.5	658	39.0	39.3	3PMF
18	1026046	1026776	225/55R18	XL	102T	BSW	6.0-8.0	50	1,874	27.8	9.2	12.5	748	29.9	30.2	3PMF
	1028932	1029000	225/60R18	XL	104T	BSW	6.0-8.0	50	1,984	28.5	9.4	12.5	729	30.4	30.8	3PMF
	1026043	1026778	235/55R18	XL	104T	BSW	6.5-8.5	50	1,984	28.0	9.6	12.5	741	31.4	31.8	3PMF
	1026849	1026848	235/60R18	XL	107T	BSW	6.5-8.5	50	2,149	29.1	9.9	12.5	715	33.0	33.3	3PMF
	1026057	1026779	235/65R18	XL	110T	BSW	6.5-8.5	50	2,337	30.0	9.6	12.5	693	34.4	34.7	3PMF
	1028918	1028986	245/60R18	SL	105T	BSW	7.0-8.5	51	2,039	29.5	10.2	12.5	703	32.3	32.9	3PMF
	1026042	1026781	255/55R18	XL	109T	BSW	7.0-9.0	50	2,271	29.0	10.4	12.5	716	35.3	35.6	3PMF
	1028923	1028991	255/65R18	SL	111T	BSW	7.0-9.0	51	2,403	31.0	10.5	12.5	670	37.5	37.8	3PMF
	1028931	1028999	255/70R18	SL	113T	BSW	6.5-8.5	51	2,535	32.0	10.1	12.5	648	38.1	38.5	3PMF
	1026039	1026783	265/60R18	XL	114T	BSW	7.5-9.5	50	2,601	30.5	11.0	12.5	681	37.6	37.9	3PMF
	1028919	1028987	265/65R18	SL	114T	BSW	7.5-9.5	51	2,601	31.5	10.7	12.5	660	38.3	38.7	3PMF
	1028924	1028992	265/70R18	SL	116T	BSW	7.0-9.0	51	2,756	32.6	10.6	12.5	637	39.8	40.2	3PMF
	1028917	1028985	275/65R18	SL	116T	BSW	7.5-9.5	51	2,756	32.0	11.1	12.5	648	40.7	41.6	3PMF
19	1032481	1032484	225/55R19	XL	103T	BSW	6.0-8.0	50	2,535	28.7	9.6	12.5	725	30.1	30.5	3PMF
	1028942	1029010	255/60R19	SL	109T	BSW	7.0-9.0	51	2,271	31.0	10.6	12.5	670	36.7	37.0	3PMF
20	1032482	1032483	255/50R20	XL	109T	BSW	7.0-9.0	50	2,271	30.0	10.9	12.5	693	35.4	35.7	3PMF
	1026047	1026787	265/50R20	XL	111T	BSW	7.5-9.5	50	2,403	30.4	11.3	12.5	684	37.4	37.7	3PMF
	1026050	1026789	275/55R20	XL	117T	BSW	7.5-9.5	50	2,833	31.8	11.3	12.5	653	41.1	41.4	3PMF
	1028921	1028989	275/60R20	XL	116T	BSW	7.5-9.5	50	2,756	32.9	11.1	12.5	631	42.3	42.6	3PMF

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	Tech	
						psi	lbs							
15	1032725	185/60R15	SL	84T	BSW	5.0-6.5	51	1,235	23.8	7.4	10.5	849	16.7	3PMSF
	1032731	185/65R15	SL	88T	BSW	5.0-6.5	51	1,235	24.4	7.4	10.5	827	17.4	3PMSF
	1032732	195/60R15	SL	88T	BSW	5.5-7.0	51	1,235	24.2	7.8	10.5	835	18.0	3PMSF
	1032739	195/65R15	SL	91T	BSW	5.5-7.0	51	1,356	25.0	7.9	10.5	808	19.3	3PMSF
	1032473	205/65R15	SL	94T	BSW	5.5-7.5	51	1,477	25.4	8.2	10.5	793	20.1	3PMSF
16	1032735	195/55R16	SL	87H	BSW	5.5-7.0	51	1,202	24.4	7.7	10.5	826	17.6	3PMSF
	1030540	205/55R16	XL	94H	BSW	5.5-7.5	50	1,477	24.9	8.4	10.5	809	19.9	3PMSF
	1032730	205/60R16	SL	92T	BSW	5.5-7.5	51	1,389	25.6	8.1	10.5	787	20.9	3PMSF
	1032738	205/65R16	SL	95T	BSW	5.5-7.5	51	1,521	26.5	8.1	10.5	760	22.2	3PMSF
	1032508	215/55R16	SL	93H	BSW	6.0-7.5	51	1,433	25.3	8.8	10.5	798	20.8	3PMSF
	1032728	215/60R16	SL	95H	BSW	6.0-7.5	51	1,521	26.1	8.5	10.5	774	23.0	3PMSF
	1032737	215/65R16	SL	98T	BSW	6.0-7.5	51	1,653	26.9	8.5	10.5	750	23.9	3PMSF
	1032491	225/60R16	SL	98T	BSW	6.0-8.0	51	1,653	26.5	8.8	10.5	760	23.6	3PMSF
17	1035559	195/60R17	SL	90H	BSW	5.5-7.0	51	1,323	26.1	8.3	10.5	796	19.9	3PMSF
	1032511	205/50R17	XL	93H	BSW	5.5-7.5	50	1,433	25.0	8.3	10.5	805	19.9	3PMSF
	1032734	215/50R17	SL	91H	BSW	6.0-7.5	51	1,356	25.6	8.6	10.5	789	22.2	3PMSF
	1032729	215/55R17	SL	94H	BSW	6.0-7.5	51	1,477	26.4	8.7	10.5	765	22.6	3PMSF
	1032726	215/60R17	SL	96T	BSW	6.0-7.5	51	1,565	27.1	8.6	10.5	743	24.4	3PMSF
	1030912	225/45R17	XL	94H	BSW	7.0-8.5	50	1,477	25.2	8.8	10.5	799	21.4	3PMSF
	1032727	225/50R17	SL	94H	BSW	6.0-8.0	51	1,477	25.8	9.0	10.5	780	22.8	3PMSF
	1032497	225/55R17	XL	101H	BSW	6.0-8.0	50	1,819	26.6	9.2	10.5	758	24.0	3PMSF
	1032486	235/45R17	SL	94H	BSW	7.5-9.0	51	1,477	25.4	9.2	10.5	795	22.3	3PMSF
	1032733	235/55R17	SL	99H	BSW	6.5-8.5	51	1,609	27.1	9.4	10.5	743	25.9	3PMSF
18	1032510	225/45R18	XL	95H	BSW	7.0-8.5	50	1,521	26.0	8.4	10.5	775	22.0	3PMSF
	1032472	235/45R18	XL	98H	BSW	7.5-9.0	50	1,653	26.5	9.1	10.5	760	23.4	3PMSF
	1032487	235/50R18	SL	97H	BSW	6.5-8.5	51	1,609	27.4	9.3	10.5	737	25.4	3PMSF

Winter i*cept IZ ³ x W636 Studless													Studless	
16	1032441	235/60R16	SL	100T	BSW	6.5-8.5	51	1,764	27.1	9.4	10.5	744	26.8	3PMSF
	1032876	235/65R16	SL	103T	BSW	6.5-8.5	51	1,929	28.0	9.4	10.5	720	27.6	3PMSF
17	1032989	215/65R17	SL	99T	BSW	6.0-7.5	51	1,709	28.0	8.6	10.5	719	25.9	3PMSF
	1032442	225/60R17	XL	103T	BSW	6.0-8.0	50	1,929	27.7	8.9	10.5	729	27.2	3PMSF
	1032443	225/65R17	XL	106T	BSW	6.0-8.0	50	2,094	28.5	8.8	10.5	707	28.2	3PMSF
	1032444	235/60R17	SL	102T	BSW	6.5-8.5	51	1,874	28.1	9.3	10.5	716	28.1	3PMSF
	1032445	235/65R17	SL	104T	BSW	6.5-8.5	51	1,984	29.0	9.4	10.5	695	29.2	3PMSF
	1032446	245/65R17	SL	107T	BSW	7.0-8.5	51	2,149	29.5	9.6	10.5	684	30.4	3PMSF
	1032788	245/70R17	SL	110T	BSW	6.5-8.0	51	2,337	30.5	9.9	10.5	661	31.3	3PMSF
	1032789	265/70R17	SL	115T	BSW	7.0-9.0	51	2,679	31.6	10.8	10.5	639	35.7	3PMSF
	1032447	215/55R18	XL	99T	BSW	6.0-7.5	50	1,709	27.4	8.7	10.5	736	24.6	3PMSF
18	1032448	225/55R18	XL	102H	BSW	6.0-8.0	50	1,874	27.8	8.9	10.5	724	26.9	3PMSF
	1032449	225/60R18	SL	100H	BSW	6.0-8.0	51	1,764	28.7	8.9	10.5	703	28.2	3PMSF
	1032450	235/55R18	XL	104T	BSW	6.5-8.5	50	1,874	28.3	9.4	10.5	712	28.0	3PMSF
	1032451	235/60R18	XL	107T	BSW	6.5-8.5	50	2,149	29.2	9.4	10.5	692	29.8	3PMSF
	1032452	235/65R18	XL	110T	BSW	6.5-8.5	50	2,337	30.0	9.4	10.5	672	31.2	3PMSF
	1032453	245/60R18	SL	105T	BSW	7.0-8.5	51	2,039	29.6	9.6	10.5	681	30.8	3PMSF
	1032790	255/65R18	SL	111T	BSW	7.0-9.0	51	2,403	31.1	10.2	10.5	649	33.4	3PMSF
	1032791	255/70R18	SL	113T	BSW	6.5-8.5	51	2,535	32.0	10.3	10.5	630	35.0	3PMSF
	1032792	265/65R18	SL	114T	BSW	7.5-9.5	51	2,601	31.6	10.6	10.5	639	35.5	3PMSF
	1032454	275/65R18	SL	116T	BSW	7.5-9.5	51	2,756	32.0	10.9	10.5	630	38.1	3PMSF
	1032455	225/55R19	XL	103T	BSW	6.0-8.0	50	1,929	29.0	8.8	10.5	696	27.9	3PMSF
	1032457	235/55R19	XL	105H	BSW	6.5-8.5	50	2,039	29.3	9.4	10.5	688	29.4	3PMSF
20	1032461	255/55R19	XL	111T	BSW	7.0-9.0	50	2,403	30.2	10.2	10.5	667	33.5	3PMSF
	1032465	255/50R20	XL	109T	BSW	7.0-9.0	50	2,271	29.9	10.2	10.5	674	32.5	3PMSF
	1032793	275/60R20	SL	115T	BSW	7.5-9.5	51	2,679	33.1	10.8	10.5	610	38.9	3PMSF

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

i*Pike RW11 | RW11

Studdable & Studded Winter

S-Code			Inch	Non-Stud	Factory Stud	Size	LI/SS	Sidewall	Rim Width Range	Max. Load			Weight			
										psi	lbs	Overall Diameter	Section Width	Tread Depth	Revs/Mile	Non-Stud
15	2021546	2021566	LT235/75R15	C	104/101Q	BSW	6.0-8.0	50	1,985 / 1,820	28.8	9.1	16.0	726	37.4	37.9	3PM SF
16	2021545	2021565	LT215/85R16	E	115/112Q	BSW	5.5-7.0	80	2,680 / 2,470	30.3	8.4	16.0	691	41.5	42.0	3PM SF
	2021538	2021558	LT225/75R16	E	115/112Q	BSW	6.0-7.5	80	2,680 / 2,470	29.2	8.5	16.0	715	42.2	41.5	3PM SF
	2021543	2021563	LT235/85R16	E	120/116Q	BSW	6.0-7.5	80	3,042 / 2,778	31.6	8.6	16.0	661	45.6	45.9	3PM SF
	2021537	2021557	LT245/75R16	E	120/116Q	BSW	6.5-8.0	80	3,042 / 2,778	30.3	9.5	16.0	689	46.1	45.3	3PM SF
	2021540	2021560	LT265/75R16	E	123/120Q	BSW	7.0-9.0	80	3,415 / 3,085	31.6	10.2	16.0	661	48.7	49.6	3PM SF
17	2021542	2021562	LT235/80R17	E	120/117Q	BSW	6.0-8.0	80	3,085 / 2,835	31.7	8.8	16.0	659	47.1	47.6	3PM SF
	2021544	2021564	LT245/70R17	E	119/116Q	BSW	6.5-8.0	80	3,000 / 2,755	30.5	9.4	16.0	686	45.5	46.0	3PM SF
	2021541	2021561	LT245/75R17	E	121/118Q	BSW	6.5-8.0	80	3,195 / 2,910	31.4	9.6	16.0	665	48.1	49.0	3PM SF
	2021536	2021556	LT265/70R17	E	121/118Q	BSW	7.0-9.0	80	3,195 / 2,910	31.6	10.6	16.0	661	50.6	51.1	3PM SF
18	2021295	-	LT265/70R18	E	124/121R	BSW	7.0-9.0	80	3,525 / 3,195	32.6	10.6	16.0	641	54.3	-	3PM SF
	2021294	-	LT275/65R18	E	123/120R	BSW	8.0-9.5	80	3,415 / 3,085	32.0	11.0	16.0	653	61.1	-	3PM SF
	2021293	-	LT275/70R18	E	125/122R	BSW	7.0-9.0	80	3,640 / 3,305	33.1	10.8	16.0	631	63.3	-	3PM SF
20	2001690	-	LT275/65R20	E	126/123Q	BSW	8.0-9.5	80	3,750 / 3,415	34.0	10.9	16.0	614	67.7	-	3PM SF

i*Pike LV | RW15

Studdable & Studded Winter

S-Code			Inch	Non-Stud	Factory Stud	Size	LI/SS	Sidewall	Rim Width Range	Max. Load			Weight			
										psi	lbs	Overall Diameter	Section Width	Tread Depth	Revs/Mile	Non-Stud
16	2022313	2022314	205/75R16C	E	113/111R	BSW	5.5-6.5	76	2,535	28.0	8.0	13.0	747	31.2	31.5	3PM SF
	2021304	2021751	195/75R16C	D	107/105R	BSW	5.0-6.0	70	2,150	27.3	7.7	13.0	765	28.7	29.0	3PM SF
	2021310	2021757	225/75R16C	E	121/120R	BSW	6.0-7.5	85	3,195	29.2	8.6	13.0	717	35.1	35.3	3PM SF
	2022311	2022312	235/65R16C	E	121/119R	BSW	6.5-7.5	83	3,195	27.9	9.4	13.0	749	34.4	34.6	3PM SF

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Tech : Hankook Innovative Technology HRS : Hankook Runflat System SOA : Sound Absorber SEG : Sealguard EV : Electric Vehicle

About Hankook

ION

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra





VANTRA

Commercial

Vantra LT

Vantra Trailer

About Hankook

iON

Ventus

Kinergy

Weatherflex

Dynapro

Winter

Vantra

VANTRA LT (RA18)

Exceptionally durable all-season tire with improved mileage
for commercial vans and transporters



Optimised pattern noise



Applied center rib in the center area.

Apply sidewall protection shield



Prevents sidewall damage from the curb stone using low pressure conditions.

Apply new 3D lateral groove



Enhance wet performance without sacrificing block strength.

Safety

Enhanced safety by improved wet braking performance.

Wet braking test (stopping distance)




The Vantra LT has an increased stopping distance of **2 - 9%** compared to conventional tires.

Mileage


The best grounding shape by applying optimised profile reduce fuel consumption

By applying optimised profile **VANTRA LT** improves fuel efficiency by minimising energy loss in driving.

High fuel consumption

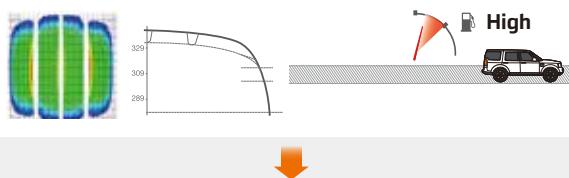


Low fuel consumption

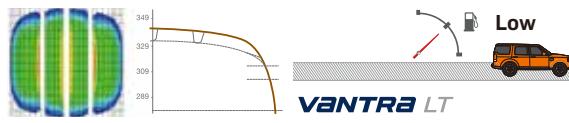

VANTRA LT improved mileage **13%** by reduce fuel consumption.

Test result

Conventional
VANTRA LT

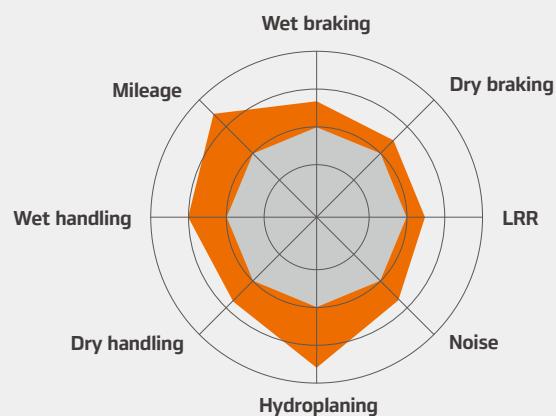

VANTRA Trailer (ST01)

Hankook's first special trailer tire

Exceptional durability and stability



Belt edge tape

Stronger bonding between the belts ensures driving stability at high speeds, and the durable structure is designed to sustain vehicle loads.




Maintain stable tire shape

Optimized rubber matrix & tire structure help to maintain the stable shape of the tire for a long time.



Flat spot (Tire deformation) test result

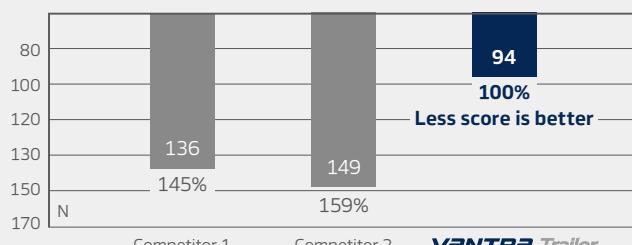

Aging durability

Optimized curing temperature helps improve aging durability performance.



High stiffness pattern block



Decoupling groove




Groove stiffness



High structure and small particle size carbon

Super abrasion structure carbon black provides low rolling resistance, delivering high mileage to drivers.

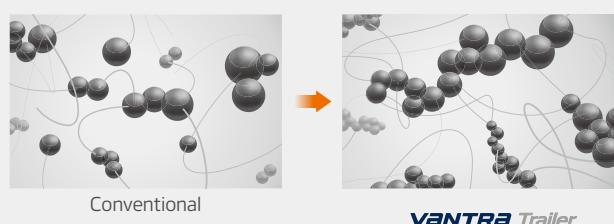

Inch	S-Code	Size	LI/SS	Sidewall	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Depth	Revs/Mile	Weight	
						psi	lbs						
13	2021432	ST175/80R13	C	91/87N	BSW	4.5-6.0	50	1,360 / 1,200	23.9	7.0	8.0	875	21.1
	2021433	ST185/80R13	C	94/89N	BSW	4.5-6.0	50	1,480 / 1,280	24.5	7.2	8.0	853	22.4
14	2021434	ST205/75R14	D	105/101N	BSW	5.0-7.0	65	2,040 / 1,820	26.0	7.9	8.0	804	28.0
	2021435	ST215/75R14	D	108/103N	BSW	5.5-7.0	65	2,200 / 1,930	26.6	8.4	8.0	787	29.8
15	2021436	ST205/75R15	D	107/102N	BSW	5.0-7.0	65	2,150 / 1,870	27.0	7.9	8.0	774	29.6
	2021437	ST225/75R15	E	117/112N	BSW	6.0-7.5	80	2,830 / 2,470	28.2	8.7	8.0	742	34.3
16	2021438	ST235/80R16	E	123/119N	BSW	6.0-8.0	80	3,420 / 3,000	30.7	9.1	8.0	682	44.2
	2021439	ST235/85R16	E	125/121N	BSW	6.0-7.5	80	3,640 / 3,200	31.6	9.0	8.0	662	45.7
	2021440	ST255/85R16	E	129/125N	BSW	6.5-8.0	80	4,080 / 3,640	32.9	9.6	8.0	635	54.5

Vantra Trailer TH31 | TH31

16	3003761	ST225/90R16	G	129/125M	BSW	6.0-7.0	110	4,080 / 3,640	31.8	8.6	12.0	660	59.0
	3003760	ST235/80R16	G	129/125M	BSW	6.0-8.0	110	4,080 / 3,640	30.8	9.2	12.0	681	60.6
	3003734	ST235/85R16	G	132/127M	BSW	6.0-7.5	110	4,400 / 3,860	31.6	9.3	12.0	664	61.6

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Vantra LT | RA18 LT-Metric

Commercial Van

Inch	S-Code	Size	LI/SS	Sidewall	Max. Load		Overall Diameter	Section Width	Tread Depth	Rev/Mile	Weight	OE	
					Rim Width Range	psi							
14	2001939	185R14C	D	102/100R	BSW	5.0-6.0	65	1,875 / 1,764	25.5	7.2	10.0	819	24.2
	2001946	195R14C	D	106/104R	BSW	5.0-6.0	65	2,094 / 1,984	26.1	7.6	12.0	800	26.3
16	2020425	195/75R16C	D	107/105R	BSW	5.0-6.0	69	2,150 / 2,040	27.3	7.7	11.5	766	28.9
													Mercedes Benz Sprinter ('18-'25)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters
Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

